
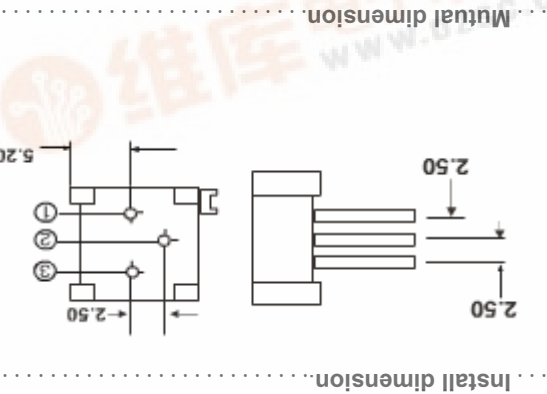


Special resistances available

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Standard Resistance Table

↑ click for larger photo

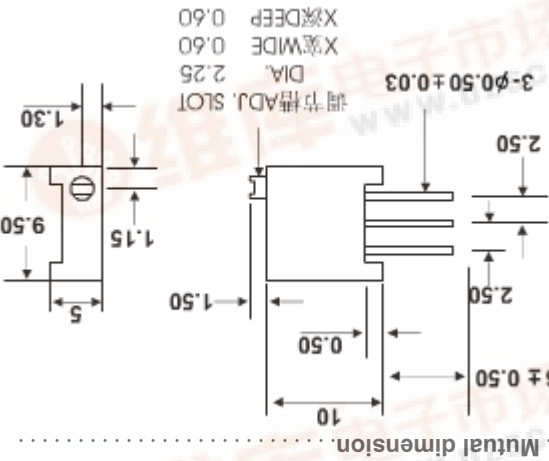

阻值代码 Resistance Code	型号 Model	样式 Style
3296	P	103

How To Order

1000h, ΔR ≤ 10% R, CRV ≤ 3% or 5Ω	70°C	0.5W @ 70°C
Electrical Endurance at	Collision	390m/s ² , 4000cycles, ΔR ≤ 5% R
ΔR ≤ 5% R, Δ(Uab/Uac) ≤ 7.5%	500Hz, 0.75mm, 6h,	Vibration
ΔR ≤ 5% R, Δ(Uab/Uac) ≤ 5%	30min 5cycles	Temperature Variation
±50ppm/°C	55°C, 30min, +125°C	Temperature Coefficient
125°C	-55°C ~	Temperature Range
0.5W @ 70°C, 0W @ 125°C	Power Rating, 315 volts max	Environmental Characteristics
Effective Travel	28 turns nom	Withstand
640Vac	Insulation Resistance	R1 ≥ 1GΩ
5Ω	Contact Resistance Variation	CRV ≤ 3% or
10Ω	Absolute Minimum Resistance	≤ 1% or
±10%	Tolerance	Resistance
2MΩ	Standard Resistance Range	50Ω ~

