

EVERLIGHT

Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

Features

- . High Flux Output.
- . Low Profile.
- . Low Thermal Resistance.
- . Low Power Consumption
- . The phosphor filled in the reflector converts the blue emission of GaN chip to ideal white.
- . Typical chromaticity coordinates $x=0.30$, $y=0.29$ according to CIE1931
- . The product itself will remain within RoHS compliant version.
- . ESD-withstand voltage: up to 4KV



Descriptions

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

Applications

- . Automotive Lighting
- . Electronic Signs and Signals
- . Special Lighting application

Device Selection Guide

PART NO.	Chip		Lens Color
	Material	Emitted Color	
32-01/T4C-4PRB	InGaN	White	Water Clear




Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

Package Dimensions

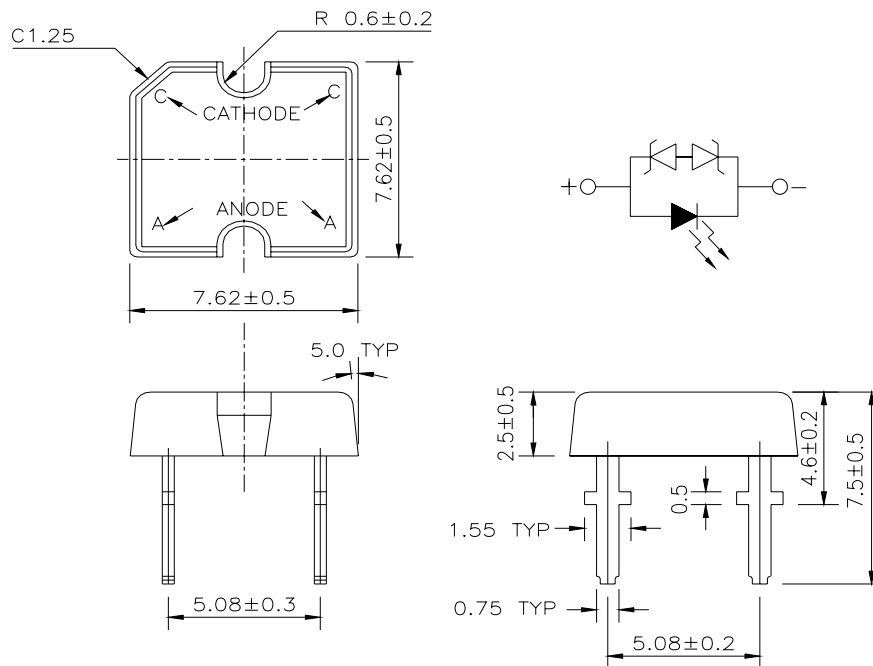

- Notes:**
- 1.All dimensions are in millimeters
 - 2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads
 - 3.Tolerances unless dimensions $\pm 0.25\text{mm}$

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_F	30	mA
Peak Forward Current(Duty 1/10 @ 1KHZ)	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	$-40 \sim +85$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$	$^\circ\text{C}$
Soldering Temperature(Time=5 sec)	T_{sol}	260 ± 5	$^\circ\text{C}$
Power Dissipation	P_d	100	mW
Electrostatic Discharge	ESD	4000	V



Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Condition	Unit
Forward Voltage	V _F	3.0	3.6	4.0	I _F =30mA	V
Reverse Current	I _R	----	----	10	V _R =5V	mA
Total Flux	Φ _v	2850	3500	5650	I _F =30mA	mlm
Viewing Angle	2 θ 1/2	----	130	----	I _F =30mA	deg
Chromaticity Coordinates	x	----	0.30	----	I _F =30mA	----
	y	----	0.29	----		----
Zener Reverse Voltage	V _Z	5.2	----	----	I _Z =5mA	V

Rank

32-01/T4C-4PRB

(1)

(2)

(3)

(1) V _F (V)			(2) Color			(3) Φ _v (mlm)		
Bin.	Min.	Max.	Bin.	Min.	Max.	Bin.	Min.	Max.
1	3.00	3.20	A0	----	----	P	2850	3600
2	3.20	3.40	B5	----	----	Q	3600	4500
3	3.40	3.60	B6	----	----	R	4500	5650
4	3.60	3.80						
5	3.80	4.00						

*Measurement Uncertainty of Forward Voltage : ±0.1V

*Measurement Uncertainty of Luminous Intensity: ±15%


CIE Chromaticity Diagram



Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

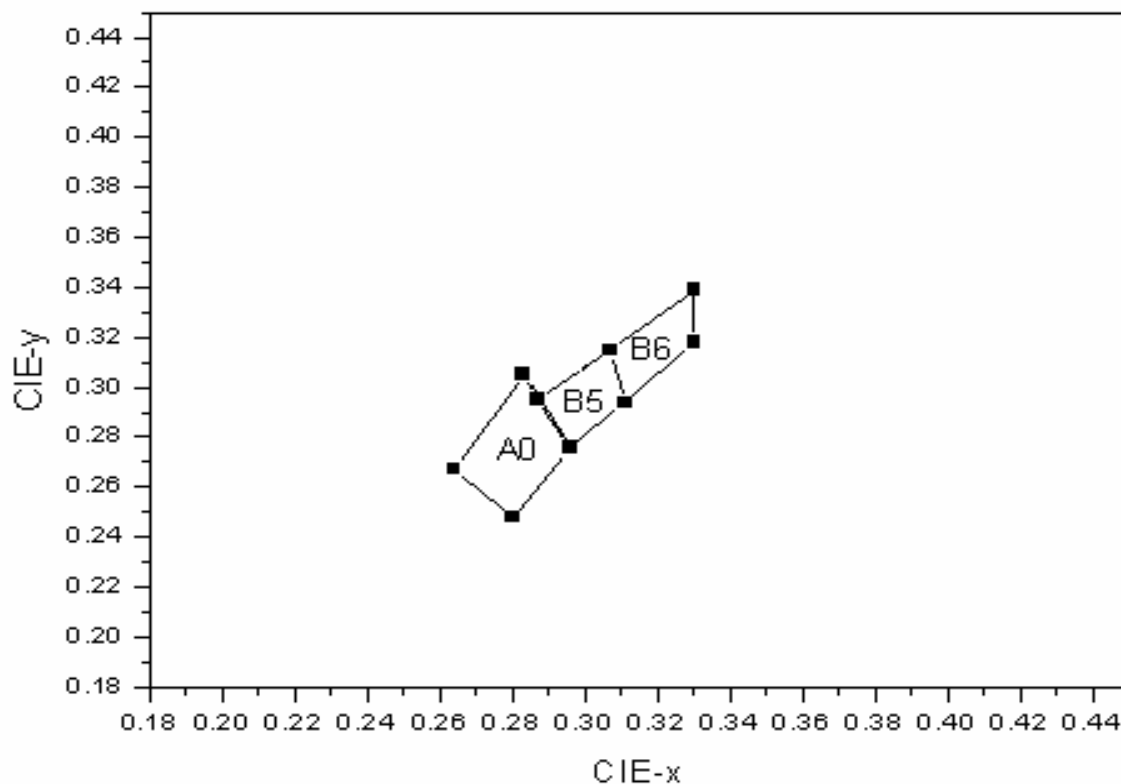

Color Ranks (IF=30mA , Ta=25℃)

Color Ranks		CIE Rank			
A0	X	0.280	0.264	0.283	0.296
	Y	0.248	0.267	0.305	0.276
B5	X	0.296	0.287	0.307	0.311
	Y	0.276	0.295	0.315	0.294
B6	X	0.311	0.307	0.330	0.330
	Y	0.294	0.315	0.339	0.318

*Measurement uncertainty of the color coordinates : ± 0.01



Typical Electro-Optical Characteristics Curves

The graph displays the PL spectrum of the ZnO film. The x-axis represents the wavelength in nanometers (nm), ranging from 350 to 750 nm. The y-axis represents the relative intensity, ranging from 0.0 to 1.2. The spectrum features two prominent peaks: a sharp, high-intensity peak at approximately 460 nm (relative intensity 1.0) and a broader, lower-intensity peak at approximately 560 nm (relative intensity ~0.5). The intensity decreases significantly as the wavelength increases beyond 600 nm.

The graph shows the forward current of a diode as a function of forward voltage. The x-axis represents forward voltage in Volts (V), ranging from 2.80 to 4.00. The y-axis represents forward current in milliamperes (mA), ranging from 0 to 30. The curve is nearly zero until about 3.00 V, then rises exponentially.

Forward Voltage (V)	Forward Current (mA)
2.80	0.0
3.00	0.5
3.20	4.0
3.40	14.0
3.60	30.0

A line graph showing the relationship between Forward Current (mA) on the x-axis and Relative Intensity on the y-axis. The x-axis ranges from 0 to 30 mA with major ticks every 5 units. The y-axis ranges from 0.00 to 1.00 with major ticks every 0.20 units. A smooth, non-linear curve starts at the origin (0, 0.00) and increases, passing through approximately (10, 0.40), (20, 0.75), and ending at (30, 1.00). The curve is concave down, indicating that the relative intensity increases at a decreasing rate as the forward current increases.

Forward Current (mA)	Relative Intensity
0	0.00
5	0.20
10	0.40
15	0.58
20	0.75
25	0.88
30	1.00

The graph shows the forward current of a 1N4148 diode as a function of ambient temperature. The current is constant at 30 mA for temperatures up to 35°C. Beyond 35°C, the current decreases linearly, reaching 10 mA at 85°C. At 90°C, the current drops to 0 mA, indicating the diode has reached its maximum operating temperature.

Ambient Temperature (°C)	Forward Current (mA)
0	30
35	30
85	10
90	0

Forward Current (mA)	Relative Intensity (a.u.) - Sample x	Relative Intensity (a.u.) - Sample y
10	0.305	0.298
20	0.302	0.295
30	0.300	0.290
40	0.298	0.285
50	0.292	0.280



Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

Packing Quantity Specification

- (1) 60 pcs/1 tube, 30 tubes/1 small inside box, 12 small inside boxes/1 outside box
- (2) 60 pcs/1 tube, 105 tubes/1 big inside box, 4 big inside boxes/1 outside box

Label Form Specification

(1) Tube Label Form

	PART NO: 32-01/T4C-4PRB	QTY: 60
	LOT NO:	CAT:

(2) Box Label Form

	
CPN:	
P/N:	
	RoHS
32-01/T4C-4PRB	
QTY :	CAT:
	HUE:
LOT NO :	REF:
	
MADE IN TAIWAN	

PART NO: Everlight's Production Number

QTY: Packing Quantity

LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Color Bin Grade and Total Flux

CPN: Customer's Production Number

P/N : Production Number

HUE: Reference

REF: Reference

MADE IN TAIWAN: Production Place




Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
4. Below the zener reference voltage V_z , all the current flows through LED and as the voltage rises to V_z , the zener diode "breakdown." If the voltage tries to rise above V_z current flows through the zener branch to keep the voltage at exactly V_z .
5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light.

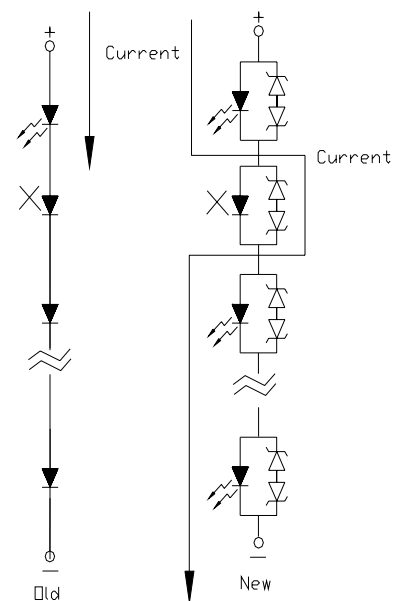



Technical Data Sheet

Flat POWER LED

32-01/T4C-4PRB

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more than 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering	
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)
Soldering time	3 sec Max.	Bath temp.	265 Max.
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.
		Distance	3mm Min.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>