

D Sub Connectors

50 Position EMI Junction Shell

3357-9250 Series



58

- Cast aluminum shell provides EMI/ESD protection
- Spring latch allows positive, quick and easy connect and disconnect
- Strain relief compensates for various round cable outside diameters
- Nickel plating provides attractive and corrosion-resistant features

Date Modified: February 19, 1999

TS-0245-05
Sheet 1 of 2

Physical

Junction Shell Kit

Hardware Included: (2) Shell Halves - Die Cast Aluminum Alloy, Clear Chromate
(2) 8 x 32 x 3/8 - Steel, Zinc
(2) Latch - Stainless Steel
(1) Tape Strip




Latch Bracket Kit

Hardware Included: (1) Bracket - Stainless Steel
(2) Screws #4-40 x 7/16 - Steel, Zinc
(6) Flat Washers - Steel, Zinc
(2) Spring Washers - Steel, Zinc



D Sub Connectors

50 Position EMI Junction Shell

3357-9250 Series

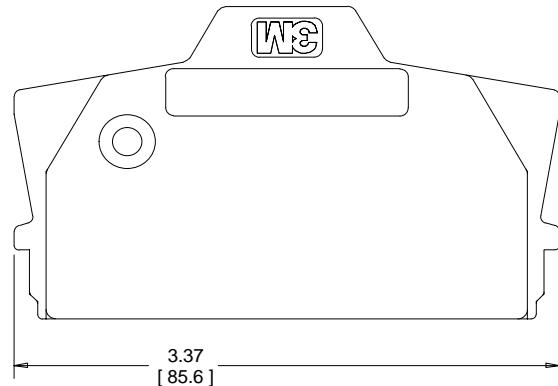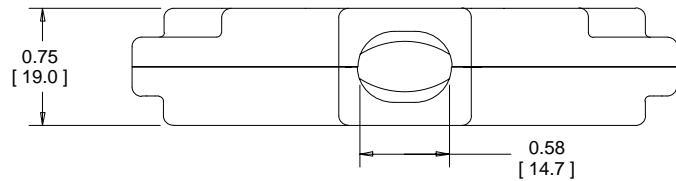

Junction Shell

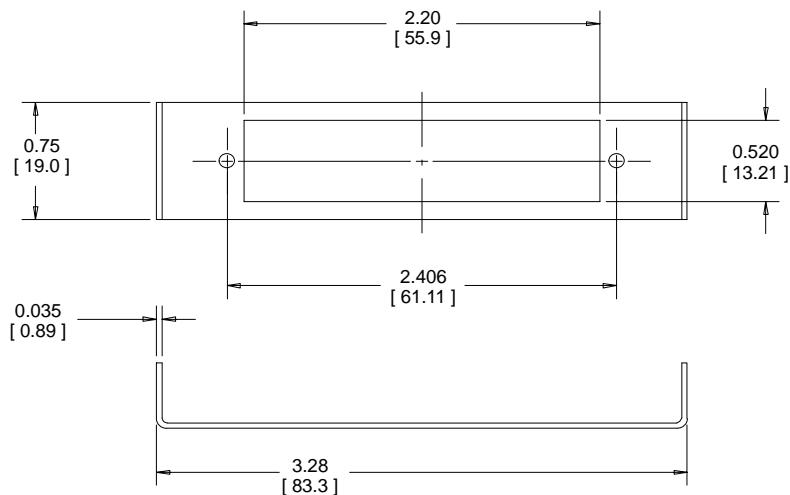

Latch Bracket

Inch [mm]			
	.0	.00	.000
Inch	$\pm .1$	$\pm .01$	$\pm .005$

[] Dimensions for
Reference only

Note: Maximum Panel Thickness for Latch Bracket is 3/32".

Ordering Information

Junction Shell

3357-9250

Latch Bracket
(Order Separately)

3505-62