



Special resistances available

10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Standard Resistance Table

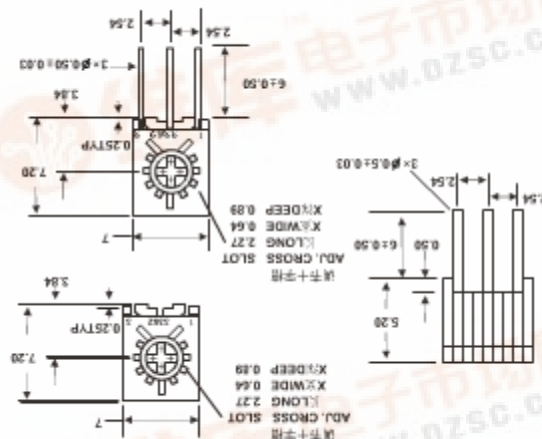


Mutual dimension.



.. Install dimension..

7x7.2 Square/Single Turn/Trimming Potentiometer

-- 3362M --

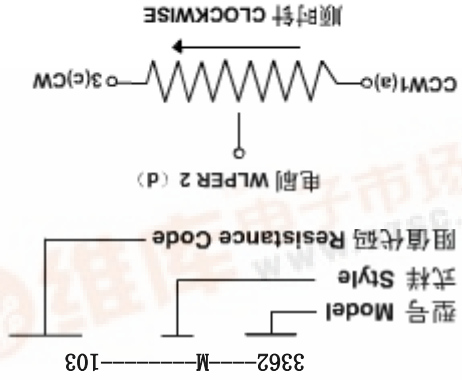

[查询3362M203供应商](#)

顺时针 CLOCKWISE

电刷 WLP2 (D)

型号 Model	式样 Style	阻值代码 Resistance Code
3362	M	103

How To Order

Starting Torque..... $\geq$

Physical Characteristics

 $\Delta R \leq 10\% R, CRV \leq 3\% \text{ or } 5\%$

Rotational Life.....200cycles

..... $1000h, \Delta R \leq 10\% R, R1 \geq 100M\Omega$

Electrical Endurance at 70°C.....0.5W@70°C

Collision.....390m/s², 4000cycles $\Delta R \leq 5\%$ R

$$\Delta R \approx 3\%, \Delta (OAB/OAC) \approx \pm 1.5\% \dots\dots\dots$$

ԱԳՎԱՍԵՂՈՇԻՈՐԸ

Vibration..... 10^{-5} $5000 \text{ Hz} = 0.25 \text{ mm/s}$

$$\Delta R \leq 5\%, \Delta(U_{ab}/U_{ac}) \leq 5\%$$

5cycles

30min.....

Temperature Variation.....-55°C,30min,+125°C

Temperature Coefficient..... $\pm 250 \text{ ppm}/^\circ\text{C}$

1237 C

Temperature Range.....-55°C ~

.....0.5W@70°C, 0W@125°C

Power Rating, 300 volts max

Environmental Characteristics

Effective Travel 2302

Wissenschaftliche Vorlage

(500Vac)

Insulation Resistance..... $R_1 \geq 1G\Omega$

.....CRV $\leq 3\%$ 或50

Absolute Minimum Resistance $\leq 1\% R_{\text{IVT}} 100$

+10%

Standard Resistance Range
500~2MO

Electrical Characteristics

