


9.6×9.6 Square/Single Turn /Trimming Potentiometer



-- 3386F--



... Install dimension



... Mutual dimension

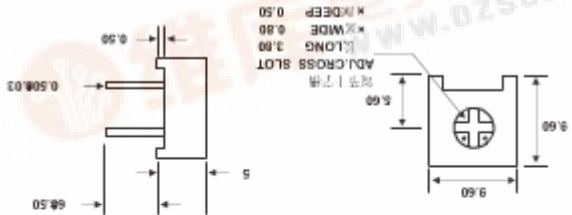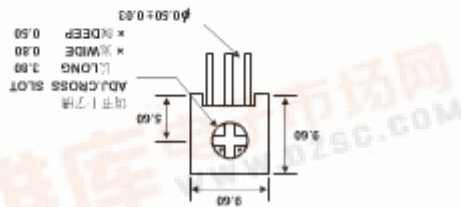

Standard Resistance Table

Resistance Code	Resistance (Ohms)
100	10
200	20
500	50
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
253	25,000
503	50,000
104	100,000
204	200,000
254	250,000
504	500,000
105	1,000,000
205	2,000,000

Special resistances available

Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ

Resistance Tolerance.....±10%

Absolute Minimum Resistance.....≤1%R或10Ω

Contact Resistance Variation.....CRV≤3%

Insulation Resistance.....R1≥1GΩ

(100Vac)

Withstand Voltage.....600Vac

Effective Travel.....300°

Environmental Characteristics

Power Rating, 315 volts max
.....0.5W@70°C,0W@125°C

Temperature Range.....-55°C~125°C

Temperature Coefficient.....±250ppm/°C

Temperature Variation.....55°C,30min,+125°C

5cycles.....30min

ΔR≤5%R,Δ(Uab/Uac)≤10%

Collision.....100m/s²,1000cycles,ΔR≤2%R

Electrical Endurance at 70°C.....0.5W@70°C

1000h,ΔR≤10%R

Δ(Uab/Uac)≤10%,CRV≤3% or 5Ω

Rotational Life.....200cycles

ΔR≤10%R,CRV≤3% or 5Ω

Physical Characteristics

How To Order

3386 F 103

型号 Model

样式 Style

阻值代码 Resistance Code

电刷 WIPER 2 (D)

顺时针 CLOCKWISE

图中公式:除注明外均为±0.25

Tolerance is ± 0.25 if no identification

查询3386F供应商

捷多邦,专业PCB打样工厂,24小时加急出货