


Special resistances available

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205


Standard Resistance Table

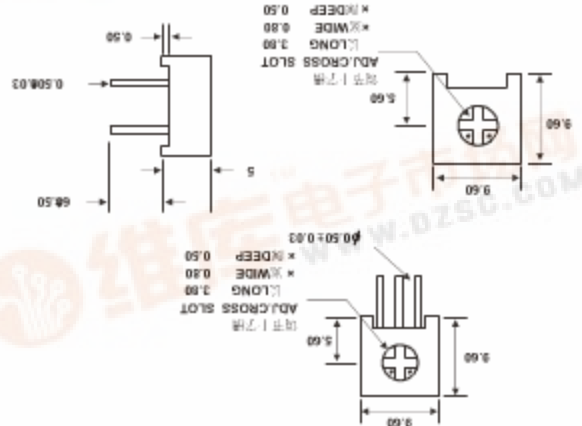

... Mutual dimension.

-- 3386T --

9.6x9.6 Square/ Single Turn /Trimming Potentiometer

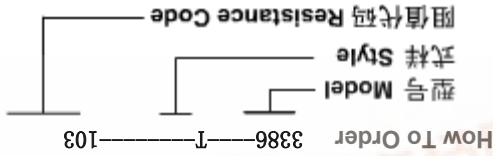

Physical Characteristics

$$\Delta R \leq 10\%, CRV \leq 3\% \text{ or } 5\%$$

Life.....200cycles

Rotational

$$\Delta(u_{ab}/u_{ac}) \leq 10\%, CRV \leq 3\% \text{ or } 5\%$$

..... $1000h, \Delta R \leq 10\%R$

70°C.....0.5W@70°C

Electrical Endurance at

Collision, 100m/s^2 , 1000 cycles, $\Delta R \leq 2\% R$
$$\Delta R \leq 5\%, \Delta(U_{ab}/U_{ac}) \leq 10\%$$

cycles

.....30min

55°C, 30 min, +125°C

Temperature Variation.....-

Temperature Coefficient..... $\pm 250 \text{ ppm}/^{\circ}\text{C}$

125°C

Temperature Range.....-55°C~

0.5W@70°C, 0W@125°C

Power Rating, 315 volts max

Environmental Characteristics

Effective Travel.....300°

Withstand Voltage.....600Vac

(100Vac)

3%


102

Absolute Minimum Resistance..... $\leq 1\%R$ 或

Resistance Tolerance $\pm 10\%$

Standard Resistance Range..... $50\Omega \sim 2M\Omega$

Electrical Characteristics



Install dimension.

