

查询7086供应商

捷多邦, 专业

Power

500 kHz Current Sense Transformers

7086-7088


POB打样

, 24小时加急出货

- Frequency range from 200 to 500 kHz
- 20 Amp peak sense current
- 1500 Vrms isolation



MECHANICAL AND SCHEMATIC (All dimensions in inches)

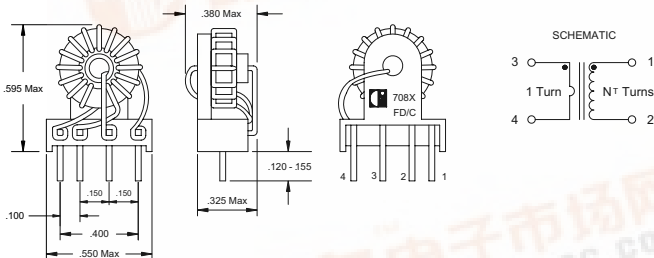

UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE ± 0.010

ELECTRICAL SPECIFICATION @ 25°C

Part Number	RT ¹ (Ω)	Secondary Turns ² N _T	Secondary Inductance ³ (μH Min)	DCR Secondary (Ω Max)	DCR Primary (Ω)	V _S (mV)
7086	1.50	10	150	.055	.006	30
7087	3.00	20	600	.097	.006	60
7088	7.50	50	4000	.240	.006	160

Terminating resistance for 15 Volt/Amp

1 turn

3. Measured @ 100 kHz, @ VS

7086-388

ISSUE: A 050-1403

pdf.dzsc.com