




CRYSTAL CONTROLLED OSCILLATORS

AURORA, IL 60505
 PHONE (630) 851-4722
 FAX (630) 851-5040
 www.conwin.com

HCMOS VCXO SURFACE MOUNT OSCILLATORS

SPECIFICATIONS	VSH61***	VSH62***	VSH63***	VSH64***
Frequency Range	125KHz to 33MHz			
Frequency Stability	±25ppm	±50ppm	±100ppm	±20ppm
Temperature Range	-40°C to +85°C			
Waveform	HCMOS Squarewave			
Load	15pF			
Output	Voltage	4.50V Minimum		
	Vol	0.40V Maximum		
	Current	-4mA		
	Iol	4mA		
Duty Cycle	45/55 Maximum Measured @ 2.5Vdc			
Rise/Fall Time	6nS Maximum			
Jitter (RMS)	10pS Maximum			
Frequency Control	Control Voltage Code (add to model number)			
	0	0.5 to 4.5Vdc	Positive Transfer Characteristic	
	1	0.0 to 5.0Vdc		
	Deviation Code (add to model number)			
	12	100 (±50ppm Minimum)		
	15	150 (±75ppm Minimum)		
	16	160 (±80ppm Minimum)		
	22	200 (±100ppm Minimum)		
	32	300 (±150ppm Minimum)		
	Center Frequency	2.5Vdc ±0.5Vdc		
Monotonic Linearity	< ±10%			
Input Impedance	≥50K ohm at ≤10KHz			
Modulation Bandwidth	≥15KHz			
Supply Voltage	+5Vdc ±5%			
Supply Current	30mA Maximum			
Package	Hermetically sealed, leadless ceramic package			
Storage Temperature	-55°C to 125°C			
Optional Suffix	T	Duty Cycle 45/55 Maximum Measured @1.4Vdc		

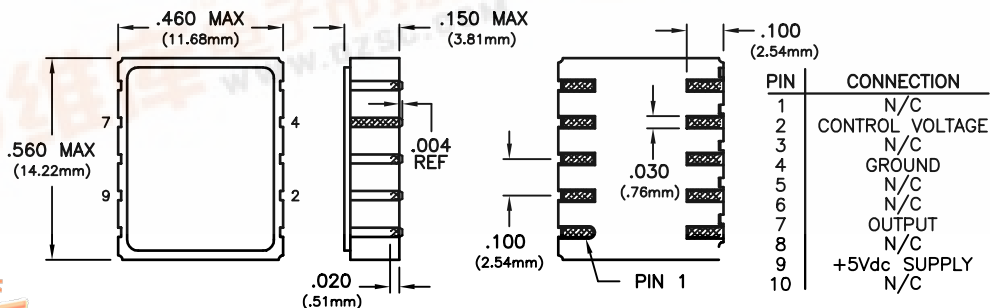

HCMOS VCXO SURFACE MOUNT OSCILLATORS

EXAMPLE MODEL NUMBER:

V S H 6 1 0 1 2 / 2 4 . 7 3 6 M H z


SURFACE MOUNT
VCXO SERIES

CENTER FREQUENCY


CONTROL VOLTAGE
0.5 to 4.5Vdc

MINIMUM DEVIATION OF
±50ppm OVER
CONTROL VOLTAGE RANGE

OUTPUT WAVEFORM

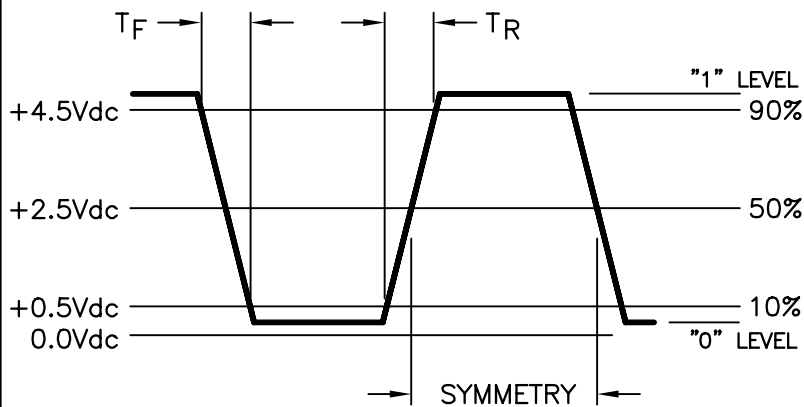

SUGGESTED PAD LAYOUT

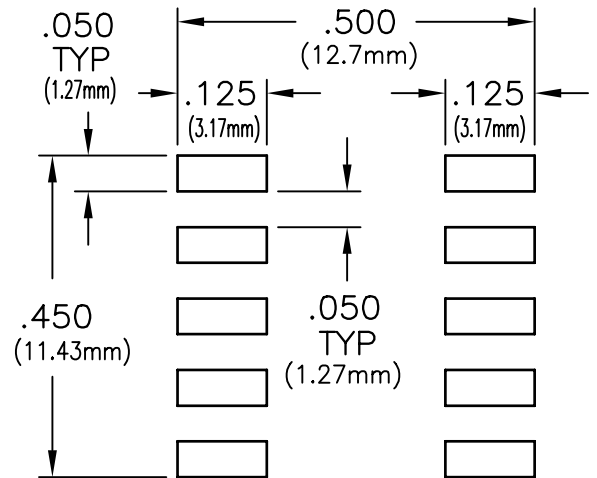

TEST CIRCUIT

