



240W Single Output Industrial DIN RAIL Power Supply

DRP-240 series



■ Features :

- Universal AC input / Full range
- Built in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508(industrial control equipment)approved
- LED indicator for power on
- 100% full load burn-in test
- Fixed switching frequency at 100KHz
- 3 years warranty




SPECIFICATION

MODEL	DRP-240-24	DRP-240-48
OUTPUT	DC VOLTAGE	24V
	RATED CURRENT	10A
	CURRENT RANGE	0 ~ 10A
	RATED POWER	240W
	RIPPLE & NOISE (max.) Note.2	80mVp-p
	VOLTAGE ADJ. RANGE	24 ~ 28V
	VOLTAGE TOLERANCE Note.3	±1.0%
	LINE REGULATION	±0.5%
	LOAD REGULATION	±1.0%
	SETUP, RISE TIME	800ms, 40ms/230VAC 800ms, 40ms/115VAC at full load
INPUT	HOLD UP TIME (Typ.)	24ms/230VAC 24ms/115VAC at full load
	VOLTAGE RANGE Note.5	85 ~ 264VAC 120 ~ 370VDC
	FREQUENCY RANGE	47 ~ 63Hz
	POWER FACTOR (Typ.)	0.96/230VAC 0.99/115VAC at full load
	EFFICIENCY (Typ.)	84% 85%
	AC CURRENT (Typ.)	2.8A/115VAC 1.4A/230VAC
	INRUSH CURRENT (Typ.)	COLD START 27A/115VAC 45A/230VAC
PROTECTION	LEAKAGE CURRENT	<3.5mA / 240VAC
	OVERLOAD	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed
	OVER VOLTAGE	30 ~ 36V 54 ~ 60V Protection type : Shut down o/p voltage, re-power on to recover
	OVER TEMPERATURE	100°C±5°C (TSW1)detect on heat sink of power transistor Protection type : Shut down o/p voltage, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMP.	-10 ~ +70°C (Refer to output load derating curve)
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, UL60950-1, TUV EN60950-1 approved
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC
	EMI CONDUCTION & RADIATION	Compliance to EN55011, EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2, -3
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-2 (EN50082-2), heavy industry level, criteria A
OTHERS	MTBF	105.5Khrs min. MIL-HDBK-217F (25°C)
	DIMENSION	125.5*125.2*100mm (W*H*D)
	PACKING	1.2Kg; 12pcs/15.5Kg/1.29CUFT
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Derating may be needed under low input voltages. Please check the derating curve for more details.	


Mechanical Specification

Case No. 922A Unit:mm

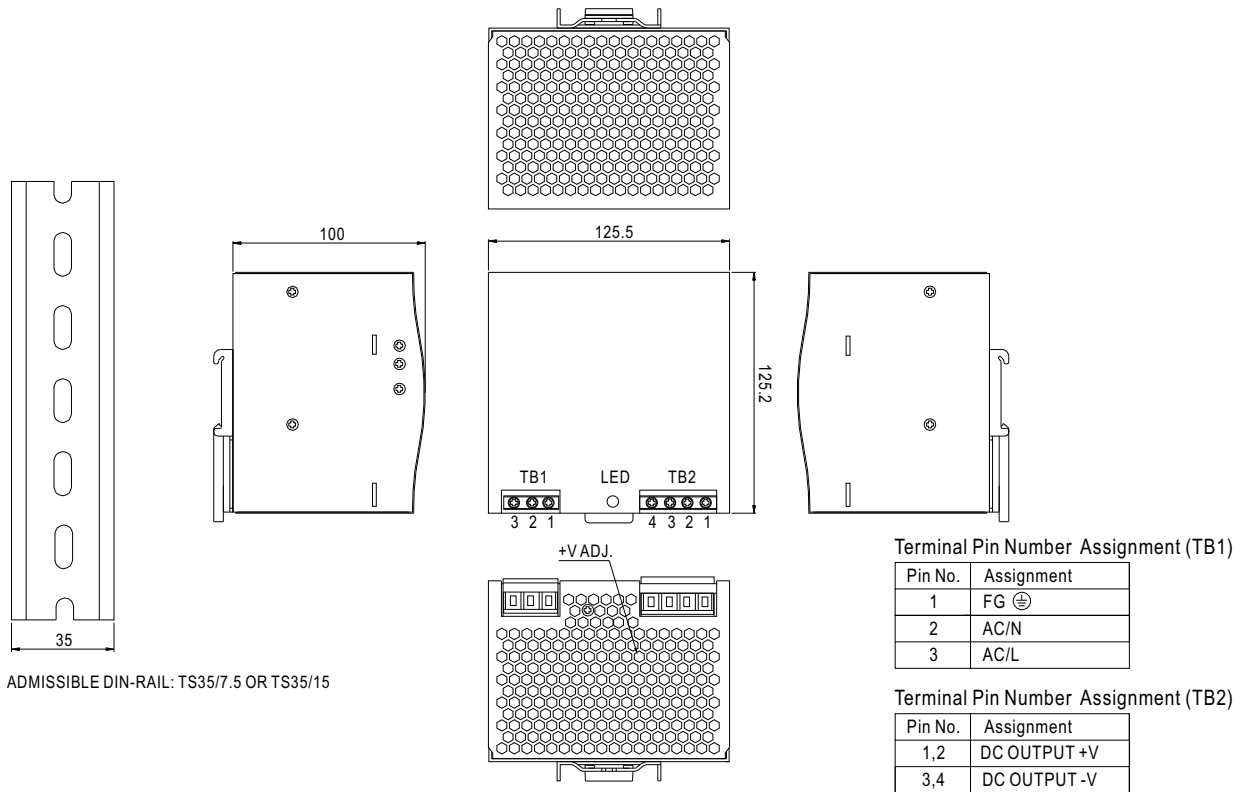

Block Diagram

fosc : 100KHz

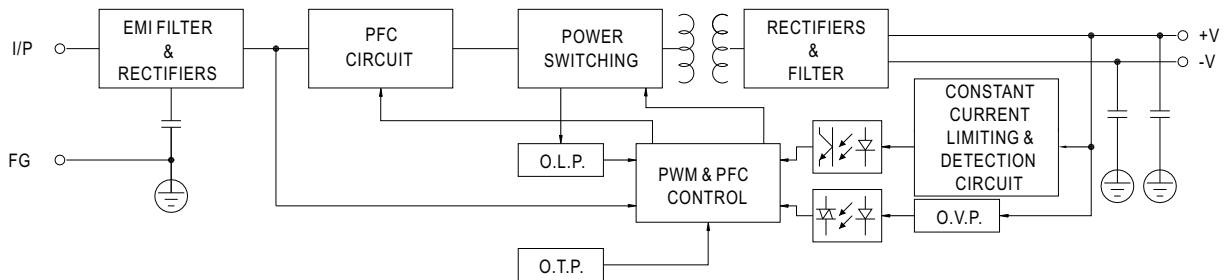

Derating Curve

Output derating VS input voltage

