

SMD Type


Transistors

PNP General Purpose Transistor

BC856,BC857,BC858

■ Features

- Low current (max. 100 mA).
- Low voltage (max. 65 V).

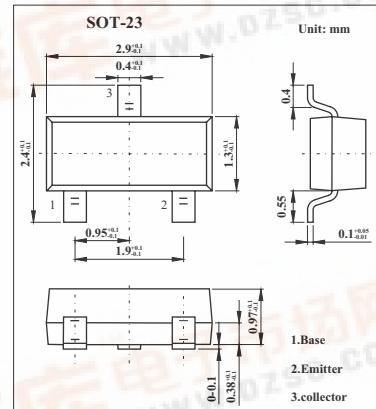

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	BC856	BC857	BC858	Unit
Collector-base voltage	V _{CBO}	-80	-50	-30	V
Collector-emitter voltage	V _{CBO}	-65	-45	-30	V
Emitter-base voltage	V _{EBO}		-5		V
Collector current	I _C		-100		mA
Peak collector current	I _{CM}		-200		mA
Peak base current	I _{BM}		-200		mA
Total power dissipation *	P _{tot}		250		mW
Junction temperature	T _j		150		°C
Storage temperature	T _{stg}		-65 to +150		°C
Operating ambient temperature	T _{amb}		-65 to +150		°C
Thermal resistance from junction to ambient *	R _{th j-a}		500		K/W

* Transistor mounted on an FR4 printed-circuit board, standard footprint.

BC856,BC857,BC858■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector cutoff current	I _{CBO}	V _{CB} = -30 V, I _E = 0	-1	-15	nA	
	I _{CBO}	V _{CB} = -30 V, I _E = 0, T _j = 150°C		-4	μA	
Emitter cutoff current	I _{EBO}	V _{EB} = -5 V, I _C = 0		-100	nA	
DC current gain	BC856	h _{FE}	125	475		
	BC857		125	800		
	BC856A,BC857A		125	250		
	BC856B,BC857B,BC858B		220	475		
	BC857C		420	800		
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = -10 mA; I _B = -0.5 mA	-75	-300	mV	
		I _C = -100 mA; I _B = -5 mA; *	-250	-650	mV	
Base-emitter saturation voltage	V _{BE(sat)}	I _C = -10 mA; I _B = -0.5 mA	-700		mV	
		I _C = -100 mA; I _B = -5 mA; *	-850		mV	
Base-emitter voltage	V _{BE}	I _C = -2 mA; V _{CE} = -5 V	-600	-650	-750	mV
		I _C = -10 mA; V _{CE} = -5 V			-820	mV
Collector capacitance	C _c	V _{CB} = -10 V; I _E = I _e = 0; f = 1 MHz	4.5		pF	
Transition frequency	f _T	V _{CE} = -5 V; I _C = -10 mA; f = 100 MHz	100			MHz
Noise figure	NF	I _C = -200 mA; V _{CE} = -5 V; R _s = 2 kΩ; f = 1 kHz; B = 200 Hz		2	10	dB

* Pulse test: t_p ≤ 300 μs, δ ≤ 0.02.

■ hFE Classification

TYPE	BC856	BC856A	BC856B
Marking	3D	3A	3B

TYPE	BC857	BC857A	BC857B	BC857C
Marking	3H	3E	3F	3G

TYPE	BC858B
Marking	3K