




- Para Riel DIN
- Uso industrial
- Salida a 5, 12, 15, 24, 48V CD
- 20-960W
- Entradas monofásicas, trifásicas
- Protección contra:
  - sobrevoltaje, sobre
  - temperatura, corto circuito,
  - sobrecarga




Código	Salida*		Fase	Voltaje de Entrada
	V	A		
PS-S2024	24	1	1	85-264V CA, 120-370V CD
PS-3024	24	1.5	1	85-264V CA, 120-370V CD
PS-4524	24	2	1	85-264V CA, 120-370V CD
PS-6024	24	2.5	1	85-264V CA, 120-370V CD
PS-7524	24	3.2	1	85-264V CA, 120-370V CD
PS-12024	24	5	1	88-132/176-264, 248-370V CD
PSP-24024	24	10	1	85-264V CA, 120-370V CD
PSP-48024	24	20	1	90-132/180-264V CA, 254-370V CD
PST-24024	24	10	3	340-550V CA, 480-780 CD
PST-48024	24	20	3	340-550V CA, 480-780 CD
PST-96024	24	40	3	340-550V CA, 480-780 CD

\*Otros voltajes de salida disponibles.


30/60W

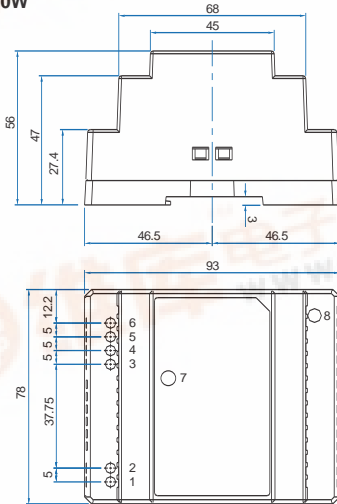


45W

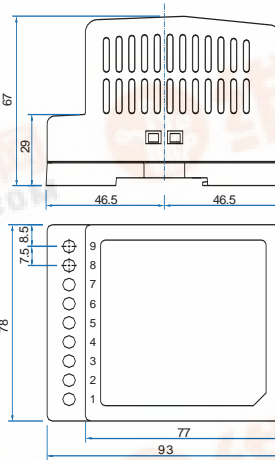


20W




Vista lateral 75-960W




480W

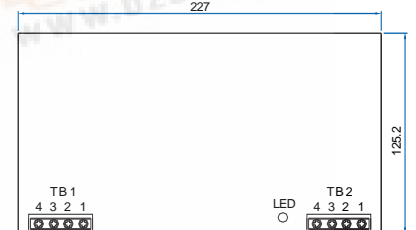


960W

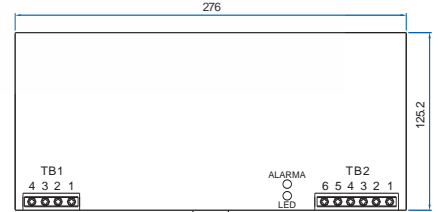

75W



120W



240W

