


SMD Type Transistors

PNP Silicon Epitaxial Transistor  
2SA1612

■ Features

- High DC current gain

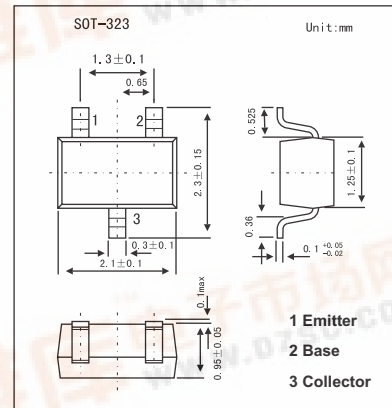

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector to base voltage	V <sub>CB0</sub>	-120	V
Collector to emitter voltage	V <sub>CEO</sub>	-120	V
Emitter to base voltage	V <sub>EBO</sub>	-5	V
Collector current (DC)	I <sub>c</sub>	-50	mA
Total power dissipation	P <sub>T</sub>	150	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature range	T <sub>stg</sub>	-55 to +150	°C

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	I <sub>cBO</sub>	V <sub>CB</sub> = -120V, I <sub>E</sub> =0			-50	nA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = -5V, I <sub>c</sub> =0			-50	nA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = -6V, I <sub>c</sub> = -1mA	135	500	900	
		V <sub>CE</sub> = -6V, I <sub>c</sub> = -0.1mA *	100	500		
Collector-emitter saturation voltage *	V <sub>CE(sat)</sub>	I <sub>c</sub> = -10mA, I <sub>b</sub> = -1mA		-0.09	-0.3	V
Base-emitter voltage	V <sub>BE</sub>	V <sub>CE</sub> = -6V, I <sub>c</sub> = -1mA	-0.55	-0.61	-0.65	V
Gain bandwidth product	f <sub>T</sub>	V <sub>CE</sub> = -6V, I <sub>E</sub> = -1mA	50	90		MHz
Output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -30V, I <sub>E</sub> = 0, f = 1.0MHz		2	3	pF

\*. PW ≤ 350μs, duty cycle ≤ 2%

■ hFE Classification

Marking	C15	C16	C17	C18
hFE	135~270	200~400	300~600	450~900

