


SMD Type Diodes

PIN Diode for VHF,UHF,AGC USE Applications
1SV234

■ Features

- Series connection of 2 elements in an ultrasmall package facilitates high-density mounting and permits 1SV234-applied equipment to be made smaller.
- Small interterminal capacitance (C=0.23pF typ).
- Small forward series resistance (rs=5 Ω typ).

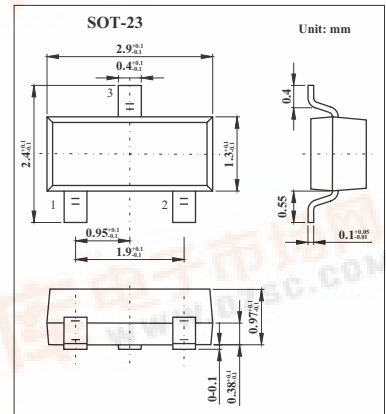

■ Absolute Maximum Ratings Ta = 25 °C

Parameter	Symbol	Value	Unit
Reverse Voltage	VR	50	V
Forward Current	IF	50	mA
Allowable Power Dissipation	P	150	mW
Junction Temperature	Tj	125	°C
Storage temperature	Tstg	-55 to +125	°C

■ Electrical Characteristics Ta = 25 °C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	VR	IR = 10 μ A	50			V
Reverse Current	IR	VR = 50 V			0.1	μ A
Forward Voltage	VF	IF = 50 mA		0.95		V
Interterminal Capacitance	C	VR = 50 V, f = 1 MHz		0.23		pF
Series Resistance	rs	IF = 10 mA, f = 100 MHz		5		Ω

Note: The specifications shown above are for each individual diode

■ Marking

Marking	CV
---------	----