


SMD Type Transistors

PNP Epitaxial Planar Silicon Transistor
2SA1772

■ Features

- High breakdown voltage
- Large current capacity (Ic=1A)

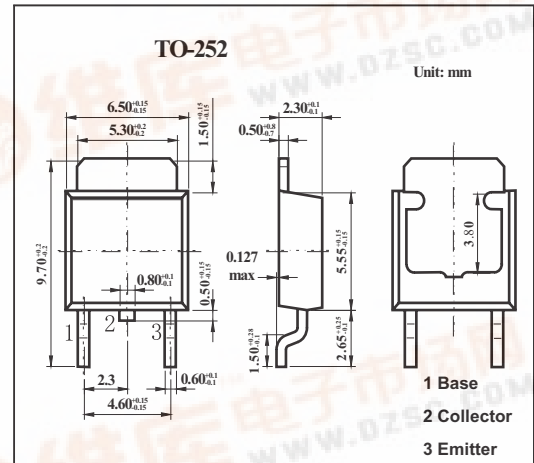


■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V _{CB0}	-400	V
Collector to Emitter Voltage	V _{CE0}	-400	V
Emitter to Base Voltage	V _{EB0}	-5	V
Collector Current (DC)	I _c	-1	A
Collector Current (Pulse)	I _c	-2	A
Collector Dissipation T _c =25°C	P _c	1	W
		15	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to 150	°C

2SA1772

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit	
Collector Cutoff Current	ICBO	V _{CB} =-300V, I _E =0			-0.1	μA	
Emitter Cutoff Current	I _{EBO}	V _{EB} =-4V, I _C =0			-0.1	μA	
DC Current Gain*	hFE	V _{CE} =-10V, I _C =-100mA	40		200		
Gain- Bandwidth Product	f _T	V _{CE} =-10V, I _C =-50mA		50		MHz	
C-E Saturation Voltage	V _{CE(sat)}	I _C =-200mA, I _B =-20mA			-1.0	V	
B-E Saturation Voltage	V _{BE(sat)}	I _C =-200mA, I _B =-20mA			-1.0	V	
C-B Breakdown Voltage	V _{(BR)CBO}	I _C =-10μA, I _E =0	-400			V	
C-E Breakdown Voltage	V _{(BR)CEO}	I _C =-1mA, R _{BE} =∞	-400			V	
E-B Breakdown Voltage	V _{(BR)EBO}	I _E =-10μA, I _C =0	-5			V	
Output Capacitance	C _{ob}	V _{CB} =-30V, f=1MHz		12		pF	
Turn-ON Time	t _{on}	 <p> $10I_{B1} = -10I_{B2} = I_C = 200\text{mA}$ $R_1 = 750\Omega, R_2 = 50\Omega$, at $I_C = 200\text{mA}$ (For PNP, the polarity is reversed.) Unit (Resistance : Ω, Capacitance : F) </p>		0.25		μs	
Storage Time	t _{stg}				3		
Fall Time	t _f				0.3		

■ hFE Classification

Rank	C	D	E
hFE	40 to 80	60 to 120	100 to 200