
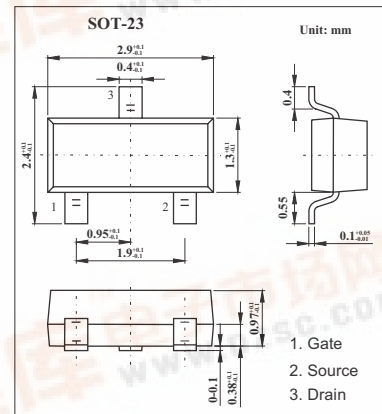


SMD Type Transistors

N-Channel 30-V (D-S) MOSFET
KI2306DS

■ Features

- TrenchFET Power MOSFET
- 100% Rg Tested



■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Drain-source voltage	V _{DS}	30	V
Gate-source voltage	V _{GS}	±20	V
Continuous drain current (T _J = 150°C)*1,2 TA=25°C TA=70°C	I _D	3.5 2.8	A
Pulsed drain current	I _{DM}	16	A
Continuous source current (diode conduction) *1,2	I _S	1.25	A
Maximum Power dissipation *1,2 TA=25°C TA=70°C	P _D	1.25 0.8	W
Operating junction and storage temperature range	T _J , T _{stg}	-55 to +150	°C
Maximum Junction to Ambienta t≤5 sec Steady State	R _{thJA}	100 130	°C/W

*1 Surface Mounted on FR4 Board.

*2 t≤5 sec

KI2306DS

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain-source breakdown voltage	V(BR)DSS	V _{GS} = 0 V, I _D = 250 μA	30			V
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1			
Gate-body leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 20 V			± 100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0 V			0.5	μA
		V _{DS} = 30V, V _{GS} = 0 V, T _J = 55 °C			10	
On-state drain current	I _{D(on)}	V _{DS} ≥ 4.5 V, V _{GS} = 10 V	6			A
		V _{DS} ≥ 4.5 V, V _{GS} = 4.5 V	4			
Drain-source on-state resistance	r _{DS(on)}	V _{GS} = 10 V, I _D = 3.5 A		0.046	0.057	Ω
		V _{GS} = 4.5 V, I _D = 2.8 A		0.070	0.094	
Forward transconductance	g _{fs}	V _{DS} = 4.5 V, I _D = 3.5 A		6.9		S
Diode forward voltage	V _{SD}	I _S = 1.25 A, V _{GS} = 0 V		0.8	1.2	V
gate charge *	Q _g	V _{DS} = 15V, V _{GS} = 5V, I _D = 3.5 A		4.2	7	nC
Total gate charge *	Q _{gt}	V _{DS} = 15V, V _{GS} = 10 V, I _D = 3.5 A		8.5	15	nC
Gate-source charge *	Q _{gs}			1.9		
Gate-drain charge *	Q _{gd}			1.35		
Gate Resistance	R _g		0.5		2.4	Ω
Input capacitance *	C _{iss}	V _{DS} = 15V, V _{GS} = 0, f = 1 MHz		555		pF
Output capacitance *	C _{oss}			120		
Reverse transfer capacitance *	C _{rss}			60		
Turn-on time	t _{d(on)}	V _{DD} = 15V, R _L = 15Ω, I _D = 1A, V _{GEN} = -10V, R _G = 6Ω		9	20	ns
	t _r			7.5	18	
Turn-off time	t _{d(off)}			17	35	
	t _f			5.2	12	

* Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.

■ Marking

Marking	A6
---------	----