


SMD Type MOSFET

P-Channel MOS Silicon FET
2SJ288

■ Features

- Low on resistance
- Very high-speed switching
- Low-voltage drive

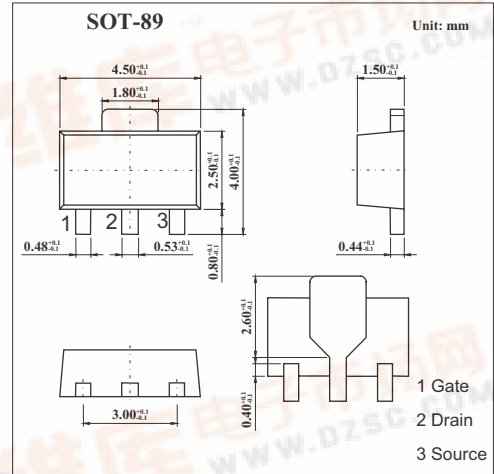

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Drain to source voltage V _{Gs} =0	V _{DSS}	-60	V
Gate to source voltage V _{Ds} =0	V _{GSS}	± 15	V
Drain current (DC)	I _D	-500	m A
Drain current(pulse) *	I _D	-2	A
Power dissipation	P _D	3.5	W
Channel temperature	T _{ch}	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

* PW ≤ 10 μs; d ≤ 1%.

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Drain cut-off current	I _{DSS}	V _{Ds} =-60V, V _{Gs} =0			-100	μ A
Gate leakage current	I _{GSS}	V _{Gs} =± 12V, V _{Ds} =0			± 10	μ A
Gate cut-off voltage	V _{Gs(off)}	V _{Ds} =-10V, I _D =-1mA	-1.0		-2.0	V
Forward transfer admittance	Y _{fs}	V _{Ds} =-10V, I _D =-250mA	240	400		ms
Drain to source on-state resistance	R _{DS(on)}	V _{Gs} =-10V, I _D =-250mA		2.2	3.0	Ω
		V _{Gs} =-4V, I _D =-250mA		3.0	4.0	Ω
Input capacitance	C _{iss}	V _{Ds} =-20V, V _{Gs} =0, f=1MHZ		45		pF
Output capacitance	C _{oss}			20		pF
Reverse transfer capacitance	C _{rss}			5		pF
Turn-on delay time	t _{d(on)}				7	
Rise time	t _r	V _{DD} =-30V, I _D =-250mA R _L =120 Ω		10		ns
Turn-off delay time	t _{d(off)}			35		ns
Fall time	t _f				20	

■ Marking

找PDF 维库一下 pdf.dzsc.com	Marking	JE
------------------------------	---------	----