

SMD Type

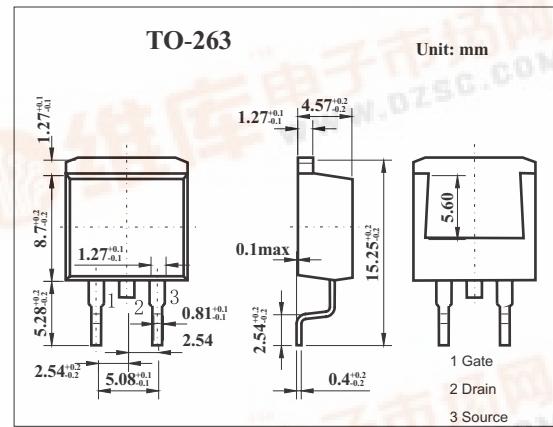
MOSFET

MOS Field Effect Transistor

2SK3479

■ Features

- Super low on-state resistance:
 $R_{DS(on)1} = 11 \text{ m}\Omega \text{ MAX. } (V_{GS} = 10 \text{ V}, I_D = 42 \text{ A})$
 $R_{DS(on)2} = 13 \text{ m}\Omega \text{ MAX. } (V_{GS} = 4.5 \text{ V}, I_D = 42 \text{ A})$
- Low Ciss: $C_{iss} = 11000 \text{ pF TYP.}$
- Built-in gate protection diode

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain to source voltage	V_{DSS}	100	V
Gate to source voltage	V_{GSS}	± 20	V
Drain current	I_D	± 83	A
	I_{Dp}^*	± 332	A
Power dissipation $T_c=25^\circ\text{C}$ $T_a=25^\circ\text{C}$	P_D	125	W
		1.5	
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

* PW≤10 μ s,Duty Cycle≤1%

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Drain cut-off current	I_{DSS}	$V_{DS}=100\text{V}, V_{GS}=0$			10	μA
Gate leakage current	I_{GSS}	$V_{GS}=\pm 20\text{V}, V_{DS}=0$			± 10	μA
Gat cutoff voltage	$V_{GS(off)}$	$V_{DS}=10\text{V}, I_D=1\text{mA}$	1.5		2.5	V
Forward transfer admittance	$ Y_{fs} $	$V_{DS}=10\text{V}, I_D=42\text{A}$	37	74		S
Drain to source on-state resistance	$R_{DS(on)1}$	$V_{GS}=10\text{V}, I_D=42\text{A}$		8.8	11	$\text{m}\Omega$
	$R_{DS(on)2}$	$V_{GS}=4.5\text{V}, I_D=42\text{A}$		10	13	$\text{m}\Omega$
Input capacitance	C_{iss}	$V_{DS}=10\text{V}, V_{GS}=0, f=1\text{MHZ}$		11000		pF
Output capacitance	C_{oss}			1100		pF
Reverse transfer capacitance	C_{rss}			540		pF
Turn-on delay time	t_{on}	$I_D=42\text{A}, V_{GS(on)}=10\text{V}, R_G=0\Omega, V_{DD}=50\text{V}$		27		ns
Rise time	t_r			18		ns
Turn-off delay time	t_{off}			140		ns
Fall time	t_f			13		ns
Total Gate Charge	Q_G	$I_D = 83\text{A}, V_{DD} = 80\text{V}, V_{GS} = 10 \text{ V}$		210		nC
Gate to Source Charge	Q_{GS}			26		nC
Gate to Drain Charge	Q_{GD}			60		nC