

INCHANGE Semiconductor

isc Product Specification

isc Silicon PNP Power Transistor

2SB1007

DESCRIPTION



- Collector-Emitter Breakdown Voltage:
: $V_{(BR)CEO} = -80V(\text{Min})$
- Good Linearity of h_{FE}
- Complement to Type 2SD1378

APPLICATIONS

- Designed for low frequency power amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-0.7	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	10	W
	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	1	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

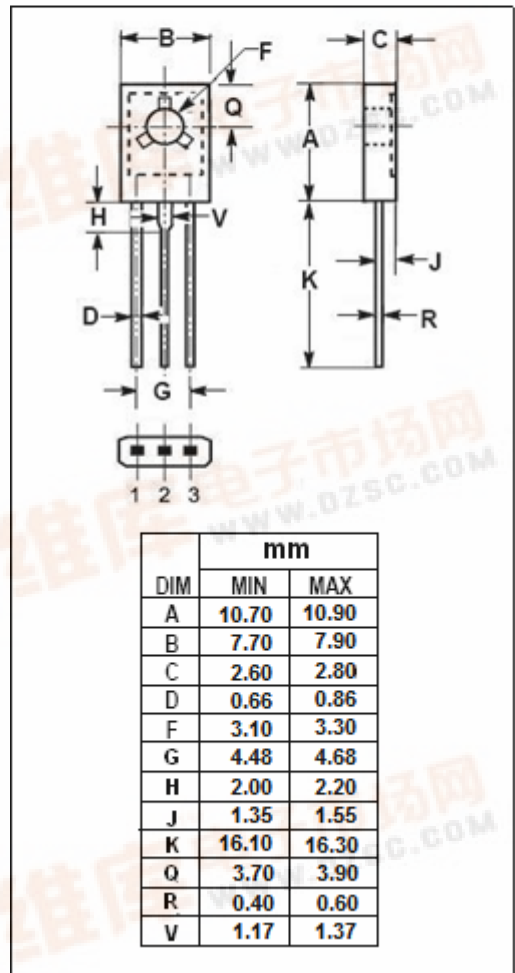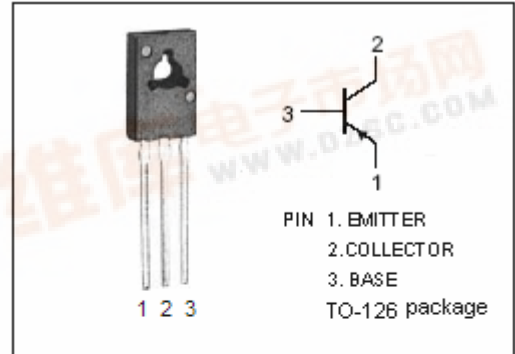

isc Silicon PNP Power Transistor**2SB1007****ELECTRICAL CHARACTERISTICS** $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C = -50\ \mu\text{A}; I_E = 0$	-80			V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -2\text{mA}; I_B = 0$	-80			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = -50\ \mu\text{A}; I_C = 0$	-5			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -500\text{mA}; I_B = -50\text{mA}$			-0.4	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -50\text{V}; I_E = 0$			-0.5	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -4\text{V}; I_C = 0$			-0.5	μA
h_{FE}	DC Current Gain	$I_C = -100\text{mA}; V_{CE} = -3\text{V}$	82		390	
f_T	Current-Gain—Bandwidth Product	$I_C = -50\text{mA}; V_{CE} = -10\text{V}$		100		MHz
C_{OB}	Output Capacitance	$I_E = 0; V_{CB} = -10\text{V}, f_{test} = 1\text{MHz}$		14		pF

◆ **h_{FE} Classifications**

P	Q	R
82-180	120-270	180-390