

Inchange Semiconductor

Product Specification

Silicon NPN Power Transistors

MJE13002

DESCRIPTION


- With TO-126 package
- High voltage ,high speed

APPLICATIONS

- Particularly suited for 115V and 220V switchmode applications such as switching regulators,inverters ,motor controls,solenoid/ relay drivers and deflection circuits.

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

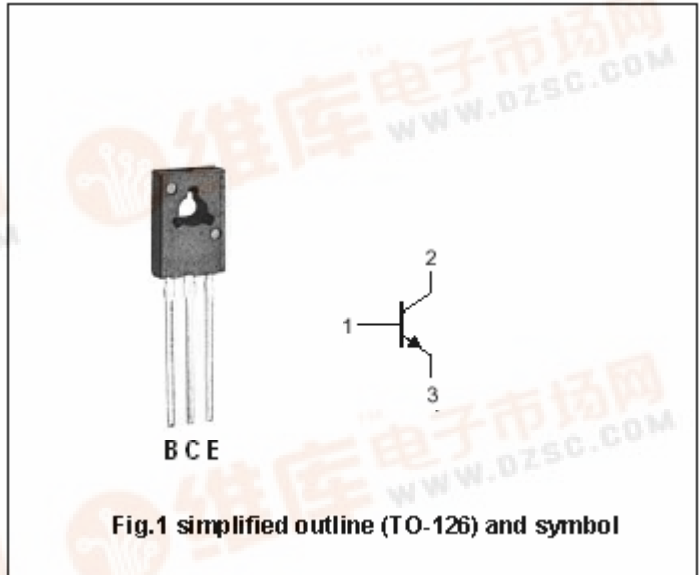

Absolute maximum ratings (Tc=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CB0}	Collector-base voltage	Open emitter	600	V
V _{CEO}	Collector-emitter voltage	Open base	300	V
V _{EBO}	Emitter-base voltage	Open collector	9	V
I _C	Collector current (DC)		1.5	A
I _{CM}	Collector current-Peak		3	A
I _B	Base current		0.75	A
I _{BM}	Base current-Peak		1.5	A
I _E	Emitter current		2.25	A
I _{EM}	Emitter current-Peak		4.5	A
P _D	Total power dissipation	T _C =25	40	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~150	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance from junction to case	3.12	/W

Silicon NPN Power Transistors

MJE13002

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	I _C =10mA ; I _B =0	300			V
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =0.5A; I _B =0.1A			0.5	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =1A; I _B =0.25A T _C =100			1.0 1.0	V
V _{CEsat-3}	Collector-emitter saturation voltage	I _C =1.5A; I _B =0.5A			3.0	V
V _{BEsat-1}	Base-emitter saturation voltage	I _C =0.5A; I _B =0.1A			1.0	V
V _{BEsat-2}	Base-emitter saturation voltage	I _C =1A; I _B =0.25A T _C =100			1.2 1.1	V
I _{CEV}	Collector cut-off current	V _{CEV} =Rated value; V _{BE (off)} =1.5V T _C =100			1.0 5.0	mA
I _{EBO}	Emitter cut-off current	V _{EB} =9V; I _C =0			1.0	mA
h _{FE-1}	DC current gain	I _C =0.5A ; V _{CE} =2V	8		40	
h _{FE-2}	DC current gain	I _C =1A ; V _{CE} =2V	5		25	
f _T	Transition frequency	I _C =0.1A ; V _{CE} =10V; f=1MHz	4			MHz
C _{OB}	Collector outoput capacitance	I _E =0; f=0.1MHz ; V _{CB} =10V		21		pF

Switching times resistive load

t _d	Delay time	V _{CC} =125V , I _C =1A I _{B1} =-I _{B2} =0.2A t _p =25 μs duty cycle 1%		0.05	0.1	μs
t _r	Rise time			0.5	1.0	μs
t _s	Storage time			2.0	4.0	μs
t _f	Fall time			0.4	0.7	μs

Silicon NPN Power Transistors

MJE13002

PACKAGE OUTLINE

