

INCHANGE Semiconductor

isc Product Specification

isc Silicon PNP Power Transistors

TIP30

DESCRIPTION

- Collector-Emitter Sustaining Voltage-  
:  $V_{CE(SUS)} = -40V(\text{Min})$
- Collector-Emitter Saturation Voltage-  
:  $V_{CE(sat)} = -0.7V(\text{Max.})@I_C = -1.0A$
- Complement to Type TIP29

APPLICATIONS



- Designed for use in general purpose amplifier and switching applications.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-base Voltage	-40	V
$V_{CEO}$	Collector-emitter Voltage	-40	V
$V_{EBO}$	Emitter-base Voltage	-5	V
$I_C$	Collector Current-Continuous	-1	A
$I_{CM}$	Collector Current-Pulse	-3	A
$I_B$	Base Current	-0.4	A
$P_C$	Collector Power Dissipation $T_C=25^\circ\text{C}$	30	w
$T_j$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.17	$^\circ\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C/W}$

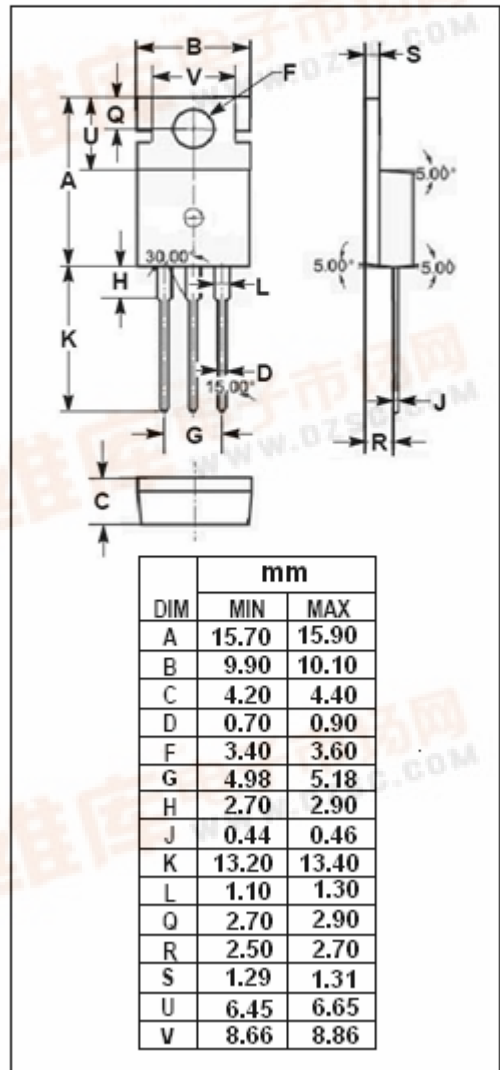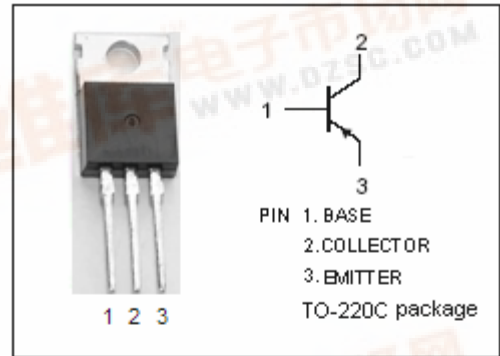

## isc Silicon PNP Power Transistors

## TIP30

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage	$I_C = -30\text{mA}; I_B = 0$	-40		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -1\text{A}; I_B = -0.125\text{A}$		-0.7	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = -1\text{A}; V_{CE} = -4\text{V}$		-1.3	V
$I_{CES}$	Collector Cutoff Current	$V_{CE} = -40\text{V}; V_{BE} = 0$		-0.2	mA
$I_{CEO}$	Collector Cutoff Current	$V_{CE} = -30\text{V}; I_B = 0$		-0.3	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -5\text{V}; I_C = 0$		-1.0	mA
$h_{FE-1}$	DC Current Gain	$I_C = -0.2\text{A}; V_{CE} = -4\text{V}$	40		
$h_{FE-2}$	DC Current Gain	$I_C = -1\text{A}; V_{CE} = -4\text{V}$	15	75	
$f_T$	Current-Gain—Bandwidth Product	$I_C = -0.2\text{A}; V_{CE} = -10\text{V}; f = 1\text{MHz}$	3		MHz