

Inchange Semiconductor

Product Specification

Silicon PNP Power Transistors


BD250/A/B/C

DESCRIPTION

- With TO-3PN package
- Complement to type BD249/A/B/C
- 125 W at 25°C case temperature
- 25 A continuous collector current

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

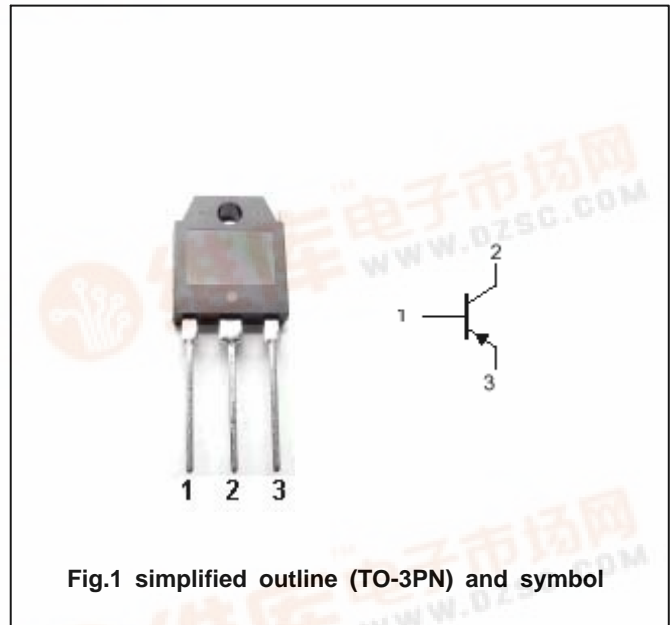

Absolute maximum ratings(Ta= )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	BD246	-55	V
		BD246A	-70	
		BD246B	-90	
		BD246C	-115	
V <sub>CEO</sub>	Collector-emitter voltage	BD246	-45	V
		BD246A	-60	
		BD246B	-80	
		BD246C	-100	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-5	V
I <sub>C</sub>	Collector current		-25	A
I <sub>CM</sub>	Collector current-peak		-40	A
I <sub>B</sub>	Base current		-5	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25	125	W
T <sub>j</sub>	Junction temperature		-65~150	
T <sub>stg</sub>	Storage temperature		-65~150	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R <sub>th j-c</sub>	Thermal resistance junction to case	1	/W

## Silicon PNP Power Transistors

## BD250/A/B/C

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	BD250	I <sub>C</sub> =-30mA ; I <sub>B</sub> =0	-45			V
		BD250A		-60			
		BD250B		-80			
		BD250C		-100			
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =-15A ; I <sub>B</sub> =-1.5A			-1.8	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =-25A ; I <sub>B</sub> =-5A			-4.0	V
V <sub>BE-1</sub>	Base-emitter on voltage		I <sub>C</sub> =-15A ; V <sub>CE</sub> =-4V			-1.6	V
V <sub>BE-2</sub>	Base-emitter on voltage		I <sub>C</sub> =-25A ; V <sub>CE</sub> =-4V			-3.0	V
I <sub>CEO</sub>	Collector cut-off current	BD250/250A	V <sub>CE</sub> =-30V I <sub>B</sub> =0			-1.0	mA
		BD250B/250C	V <sub>CE</sub> =-60V I <sub>B</sub> =0				
I <sub>EBO</sub>	Emitter cut-off current		V <sub>EB</sub> =-5V ; I <sub>C</sub> =0			-1.0	mA
h <sub>FE-1</sub>	DC current gain		I <sub>C</sub> =-1.5A ; V <sub>CE</sub> =-4V	25			
h <sub>FE-2</sub>	DC current gain		I <sub>C</sub> =-15A ; V <sub>CE</sub> =-4V	10			
h <sub>FE-3</sub>	DC current gain		I <sub>C</sub> =-25A ; V <sub>CE</sub> =-4V	5			

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =-5A; I <sub>B1</sub> =-I <sub>B2</sub> =-0.5A R <sub>L</sub> =5		0.2		μs
t <sub>off</sub>	Turn-off time			0.4		μs

Silicon PNP Power Transistors

BD250/A/B/C

PACKAGE OUTLINE

