



MBR2030CT thru MBR20150CT

SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - 30 to 150Volts

FORWARD CURRENT - 20.0 Amperes


FEATURES

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

MECHANICAL DATA

- Case: TO-220AB molded plastic
- Polarity: As marked on the body
- Weight: 0.08ounces,2.24 grams
- Mounting position :Any

TO-220AB

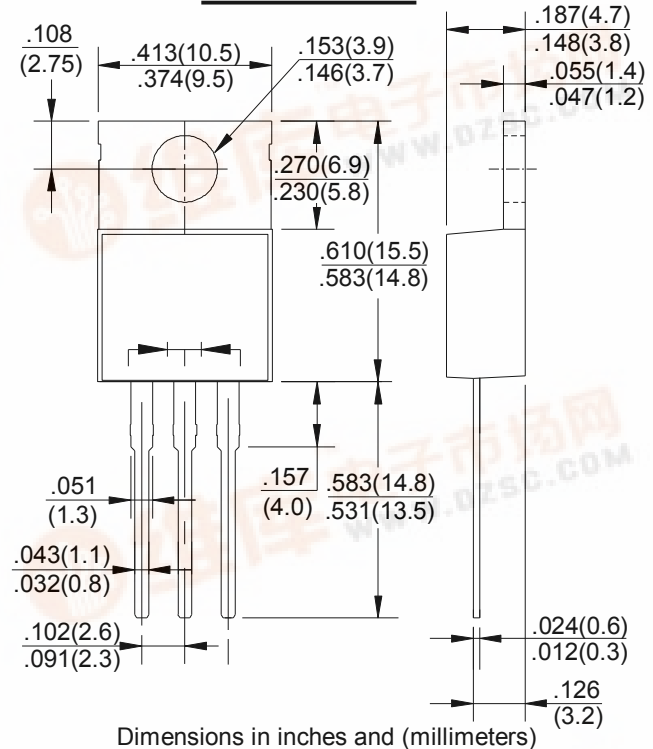

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MBR 2030CT	MBR 2040CT	MBR 2050CT	MBR 2060CT	MBR 2080CT	MBR 20100CT	MBR 20150CT	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	30	40	50	60	80	100	150	V
Maximum RMS Voltage	VRMS	21	28	35	42	56	70	105	V
Maximum DC Blocking Voltage	VDC	30	40	50	60	80	100	150	V
Maximum Average Forward Rectified Current (See Fig.1)	IAV)	20.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	150							A
Peak Forward Voltage (Note1) IF=10A @TJ=25℃ IF=10A @TJ=125℃ IF=20A @TJ=25℃ IF=20A @TJ=125℃	VF	- 0.57 0.84 0.72	0.80 0.70 0.95 0.85		0.85 0.75 0.95 0.85		0.95 0.85 1.05 0.95		V
Maximum DC Reverse Current @TJ=25℃ at Rated DC Bolcking Voltage @TJ=125℃	IR	0.1 15	0.1 10		0.1 7.5		0.1 5.0		mA
Typical Junction Capacitance (Note2)	CJ	400		320					pF
Typical Thermal Resistance (Note3)	RθJC	1.5				3.5			℃/W
Operating Temperature Range	TJ	-55 to +150							℃
Storage Temperature Range	TSTG	-55 to +175							℃

NOTES: 1. 300us pulse width, 2% duty cycle.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to case

RATING AND CHARACTERISTIC CURVES
MBR2030CT thru MBR20150CT



FIG. 1 – FORWARD CURRENT DERATING CURVE

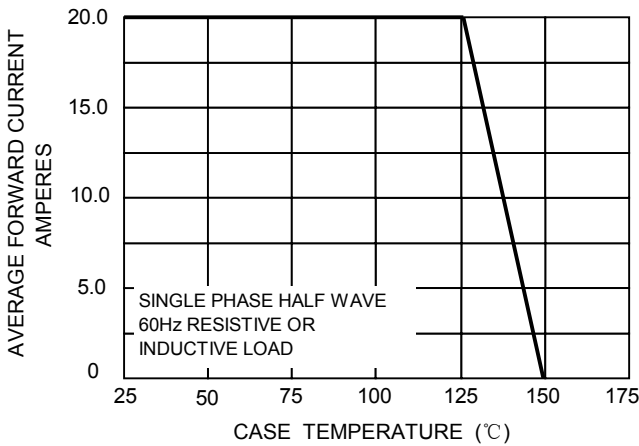


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

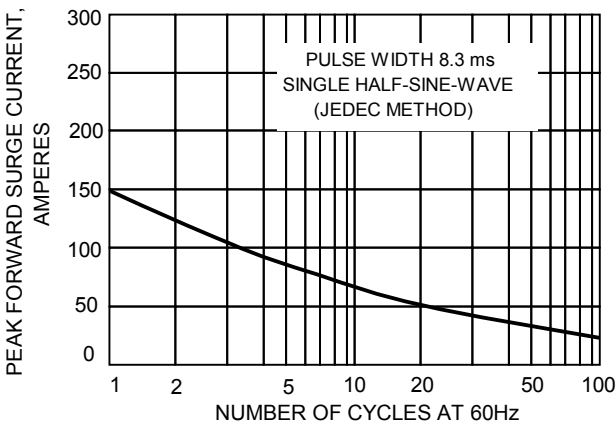


FIG.3-TYPICAL REVER CHARACTERISTICS

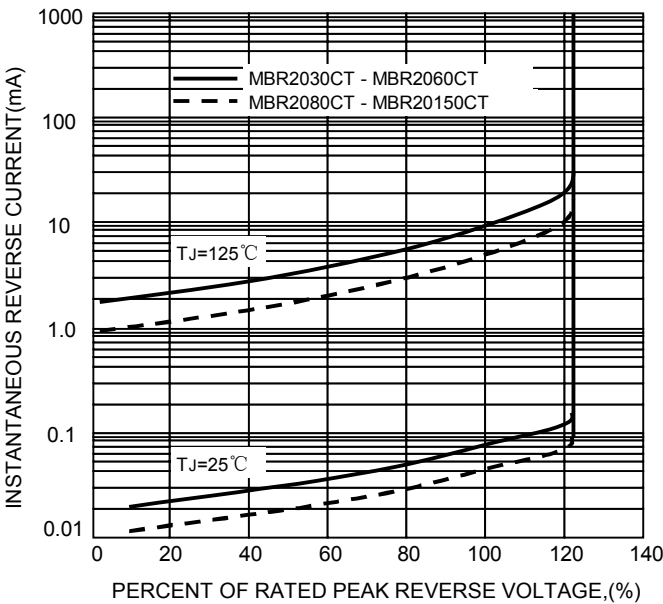


FIG.4-TYPICAL FORWARD CHARACTERISTICS

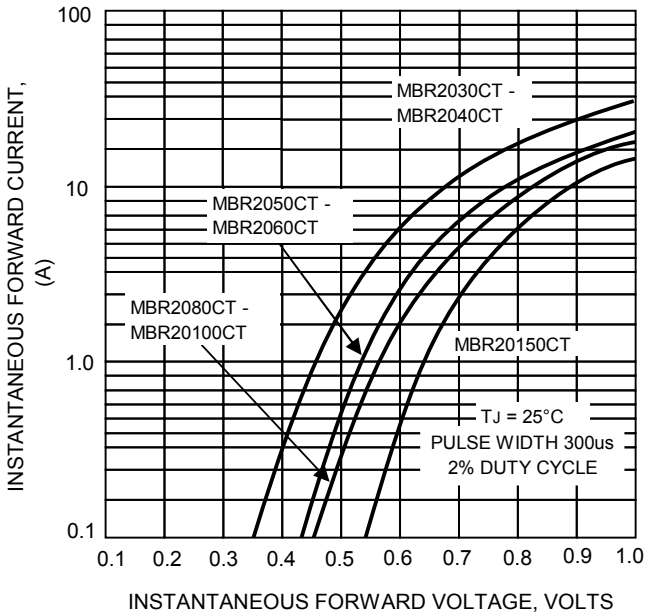


FIG.5 – TYPICAL JUNCTION CAPACITANCE

