



MBRF1630CT thru MBRF16150CT

SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - 30 to 150Volts

FORWARD CURRENT - 16.0 Amperes


FEATURES

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

MECHANICAL DATA

- Case: ITO-220AB molded plastic
- Polarity: As marked on the body
- Weight: 0.08ounces,2.24 grams
- Mounting position :Any

ITO-220AB

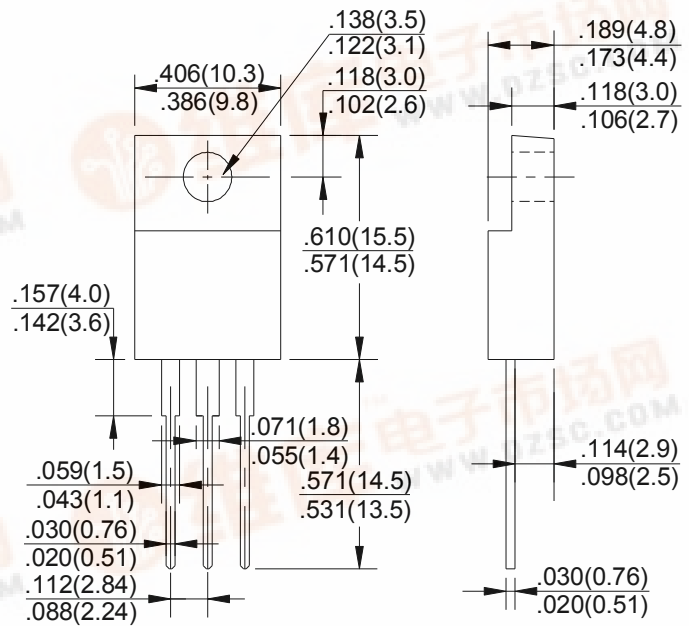

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MBRF 1630CT	MBRF 1640CT	MBRF 1650CT	MBRF 1660CT	MBRF 1680CT	MBRF 16100CT	MBRF 16150CT	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	30	40	50	60	80	100	150	V
Maximum RMS Voltage	VRMS	21	28	35	42	56	70	105	V
Maximum DC Blocking Voltage	VDC	30	40	50	60	80	100	150	V
Maximum Average Forward Rectified Current (See Fig.1)	I(AV)	16.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	150							A
Peak Forward Voltage (Note1) IF=8A @TJ=25℃ IF=8A @TJ=125℃ IF=16A @TJ=25℃ IF=16A @TJ=125℃	VF	0.84 0.57 0.72 -	0.75 0.65 - -			0.85 0.75 0.95 0.85	1.05 0.92 - -		V
Maximum DC Reverse Current at Rated DC Bolcking Voltage @TJ=25℃ @TJ=125℃	IR	0.3 10				0.1 5			mA
Typical Junction Capacitance (Note2)	CJ	400				200			pF
Typical Thermal Resistance (Note3)	RθJC	3.0							℃/W
Operating Temperature Range	TJ	-55 to +150							℃
Storage Temperature Range	TSTG	-55 to +175							℃

NOTES: 1. 300us pulse width, 2% duty cycle.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

3 Thermal resistance junction to case

RATING AND CHARACTERISTIC CURVES
MBRF1630CT thru MBRF16150CT



FIG. 1 – FORWARD CURRENT DERATING CURVE

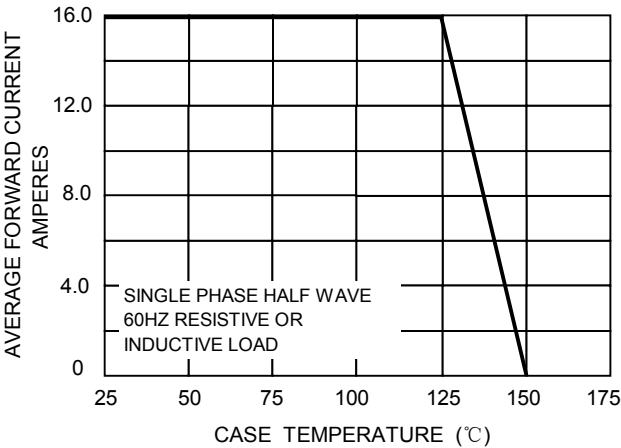


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

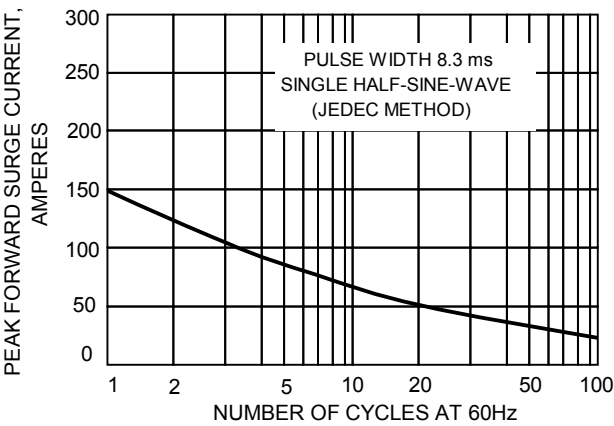


FIG.3-TYPICAL REVER CHARACTERISTICS

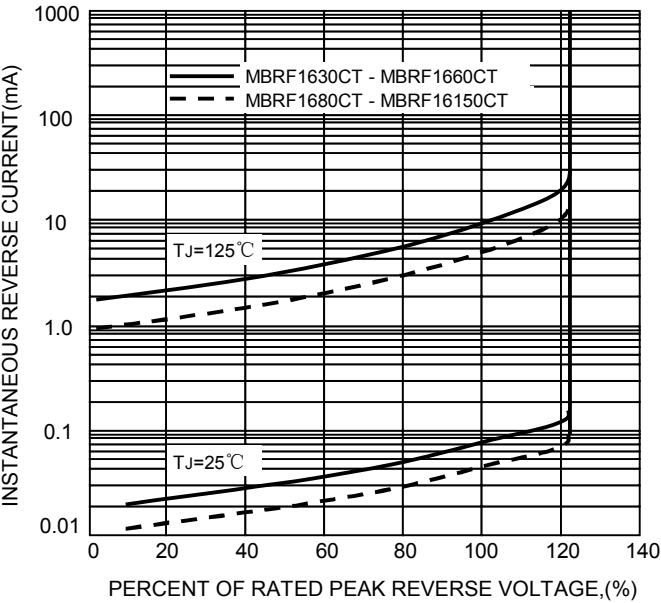


FIG.4-TYPICAL FORWARD CHARACTERISTICS

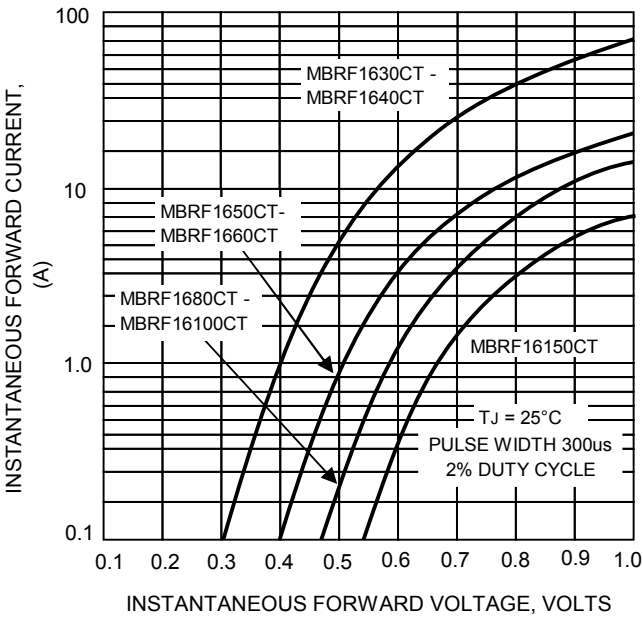


FIG.5 – TYPICAL JUNCTION CAPACITANCE

