

Inchange Semiconductor

Product Specification

Silicon NPN Power Transistors

2N6037 2N6038 2N6039

DESCRIPTION

- With TO-126 package
- Complement to type 2N6034/6035/6036
- DARLINGTON
- High DC current gain

APPLICATIONS

- Designed for general-purpose amplifier and low-speed switching applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Emitter
2	Collector
3	Base

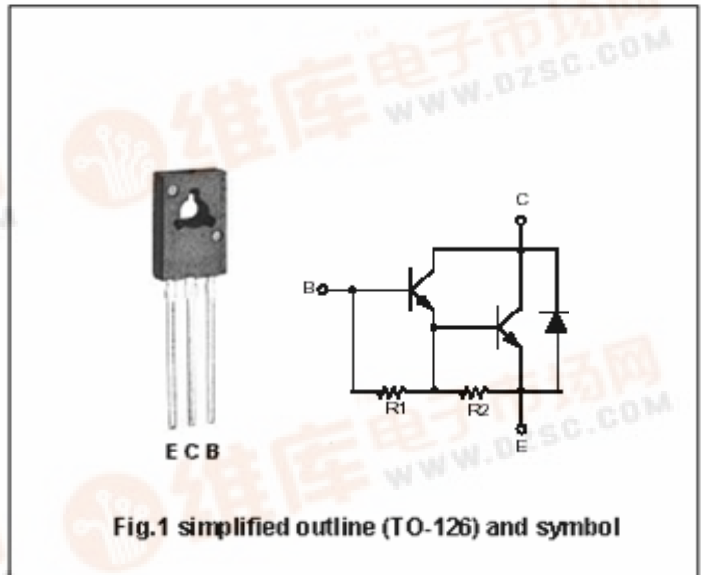


Fig.1 simplified outline (TO-126) and symbol

Absolute maximum ratings(Ta=)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2N6037	40	V
		2N6038	60	
		2N6039	80	
V _{CEO}	Collector-emitter voltage	2N6037	40	V
		2N6038	60	
		2N6039	80	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		4	A
I _{CM}	Collector current-peak		8	A
I _B	Base current		0.1	A
P _D	Total Power Dissipation	T _C =25	40	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~150	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R _{th j-c}	Thermal resistance junction to case	3.12	/W

Silicon NPN Power Transistors

2N6037 2N6038 2N6039

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	2N6037	40			V
		2N6038	60			
		2N6039	80			
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =2A; I _B =8mA			2.0	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =4A; I _B =40mA			3.0	V
V _{BEsat}	Base-emitter saturation voltage	I _C =4A; I _B =40mA			4.0	V
V _{BE}	Base-emitter on voltage	I _C =2A; V _{CE} =3V			2.8	V
I _{CEO}	Collector cut-off current	V _{CE} =Rated V _{CEO} ; I _B =0			0.1	mA
I _{CEX}	Collector cut-off current	V _{CE} =Rated V _{CEO} ; V _{BE(off)} =1.5V T _C =125			0.1 0.5	mA
I _{CBO}	Collector cut-off current	V _{CB} =Rated V _{CBO} ; I _E =0			0.1	mA
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			2.0	mA
h _{FE-1}	DC current gain	I _C =0.5A; V _{CE} =3V	500			
h _{FE-2}	DC current gain	I _C =2A; V _{CE} =3V	750		15000	
h _{FE-3}	DC current gain	I _C =4A; V _{CE} =3V	100			
C _{OB}	Output capacitance	I _E =0; V _{CB} =10V; f=0.1MHz			100	pF

Silicon NPN Power Transistors

2N6037 2N6038 2N6039

PACKAGE OUTLINE

