



# SRF1030 thru SRF10150

<b>SCHOTTKY BARRIER RECTIFIERS</b>	REVERSE VOLTAGE - <b>30 to 150</b> Volts FORWARD CURRENT - <b>10.0</b> Amperes
<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>●Metal of silicon rectifier , majority carrier conduction</li> <li>●Guard ring for transient protection</li> <li>●Low power loss,high efficiency</li> <li>●High current capability,low VF</li> <li>●High surge capacity</li> <li>●Plastic package has UL flammability classification 94V-0</li> <li>●For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>●Case: ITO-220AC molded plastic</li> <li>●Polarity: As marked on the body</li> <li>●Weight: 0.08ounces,2.24 grams</li> <li>●Mounting position :Any</li> </ul>	<p><b>ITO-220AC</b></p> <p>Dimensions in inches and (millimeters)</p>

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave ,60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SRF 1030	SRF 1040	SRF 1050	SRF 1060	SRF 1080	SRF 10100	SRF 10150	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	30	40	50	60	80	100	150	V	
Maximum RMS Voltage	VRMS	21	28	35	42	56	70	105	V	
Maximum DC Blocking Voltage	VDC	30	40	50	60	80	100	150	V	
Maximum Average Forward Rectified Current ( See Fig.1) @Tc=95 °C	I(AV)	10.0							A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	175							A	
Peak Forward Voltage at 10.0A DC (Note1)	VF	0.55		0.70		0.85		0.95	V	
Maximum DC Reverse Current at Rated DC Bolcking Voltage @Tj=25°C @Tj=100°C	IR	1.0							50	mA
Typical Junction Capacitance (Note2)	CJ	500							pF	
Typical Thermal Resistance (Note3)	RθJC	2.5							°C/W	
Operating Temperature Range	TJ	-55 to +125							°C	
Storage Temperature Range	TSTG	-55 to +150							°C	

NOTES:1.300us pulse width,2% duty cycle.  
 2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.  
 3.Thermal resistance junction to case.

pdf.dzsc.com

# RATING AND CHARACTERISTIC CURVES

## SRF1030 thru SRF10150



FIG. 1 – FORWARD CURRENT DERATING CURVE

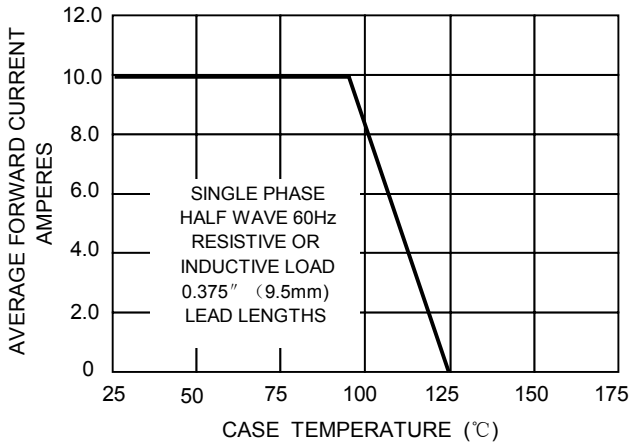


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

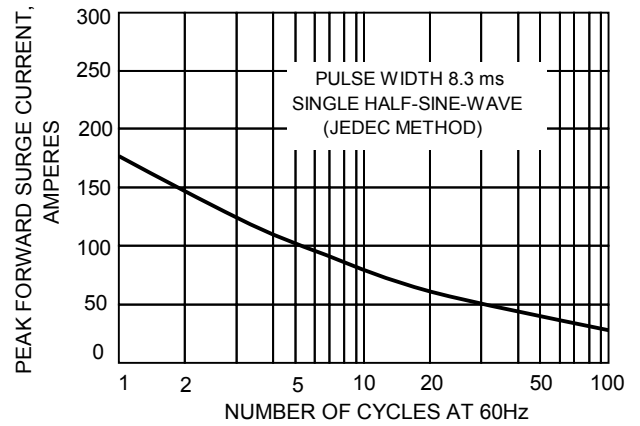


FIG.3-TYPICAL REVER CHARACTERISTICS

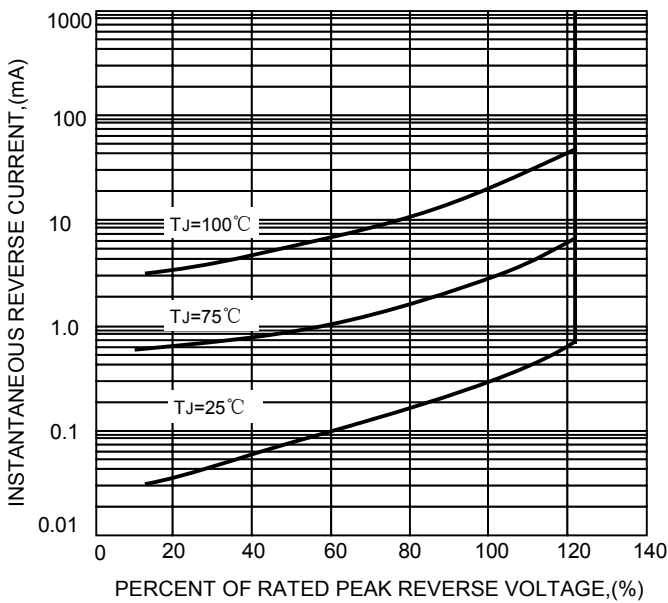


FIG.4-TYPICAL FORWARD CHARACTERISTICS

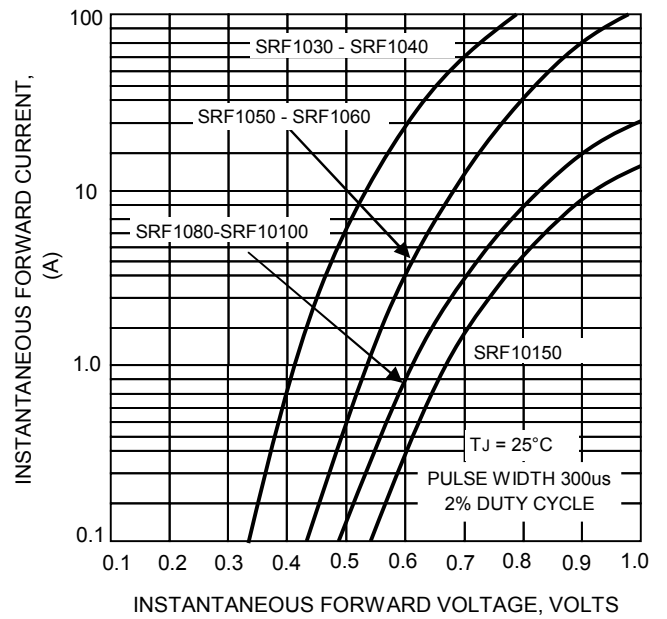


FIG.5 – TYPICAL JUNCTION CAPACITANCE

