



SRF830 thru SRF8100

SCHOTTKY BARRIER RECTIFIERS	REVERSE VOLTAGE - 30 to 100 Volts FORWARD CURRENT - 8.0 Amperes
<p>FEATURES</p> <ul style="list-style-type: none"> ● Metal of silicon rectifier , majority carrier conduction ● Guard ring for transient protection ● Low power loss,high efficiency ● High current capability,low VF ● High surge capacity ● Plastic package has UL flammability classification 94V-0 ● For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> ● Case: ITO-220AC molded plastic ● Polarity: As marked on the body ● Weight: 0.08ounces,2.24 grams ● Mounting position :Any 	<p>ITO-220AC</p> <p>Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave ,60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SRF830	SRF840	SRF850	SRF860	SRF880	SRF8100	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	30	40	50	60	80	100	V
Maximum RMS Voltage	V _{RMS}	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	V _{DC}	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current (See Fig.1) @T _C =95 °C	I _(AV)	8.0						A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	200						A
Peak Forward Voltage at 8.0A DC (Note1)	V _F	0.55		0.70		0.85		V
Maximum DC Reverse Current @T _J =25°C at Rated DC Blocking Voltage @T _J =100°C	I _R	1.0						mA
Typical Junction Capacitance (Note2)	C _J	450						pF
Typical Thermal Resistance (Note3)	R _{θJC}	3.0						°C/W
Operating Temperature Range	T _J	-55 to +125						°C
Storage Temperature Range	T _{STG}	-55 to +150						°C

NOTES:1.300us pulse width,2% duty cycle.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
 3. Thermal resistance junction to case.



RATING AND CHARACTERISTIC CURVES

SRF830 thru SRF8100



FIG. 1 – FORWARD CURRENT DERATING CURVE

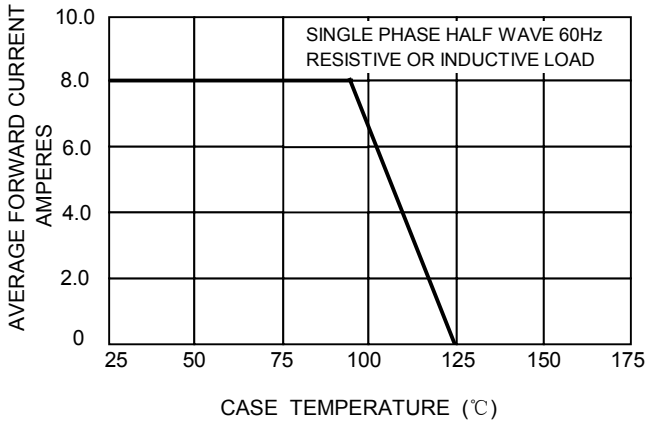


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

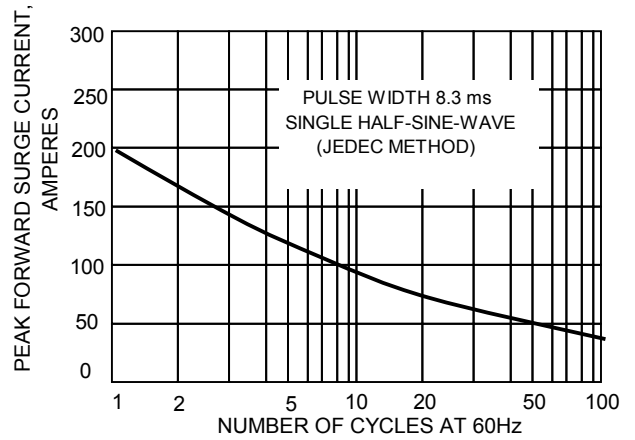


FIG.3-TYPICAL REVER CHARACTERISTICS

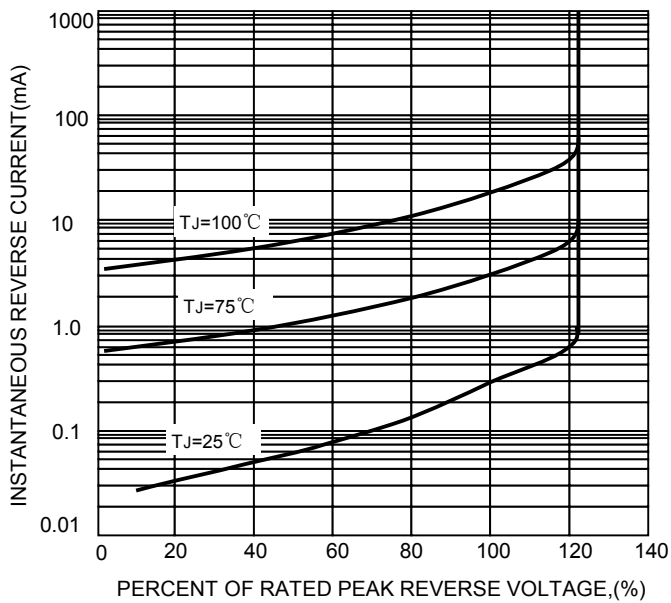


FIG.4-TYPICAL FORWARD CHARACTERISTICS

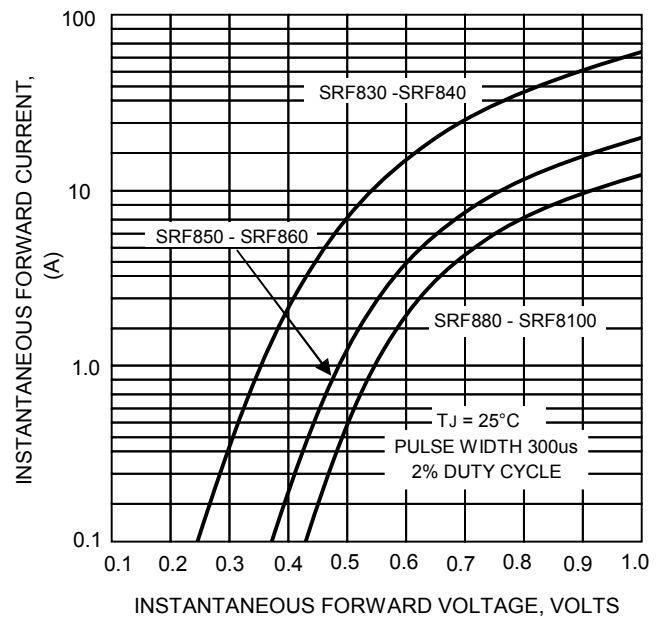


FIG.5 – TYPICAL JUNCTION CAPACITANCE

