

Inchange Semiconductor

Product Specification

Silicon PNP Power Transistors

2SA1725

DESCRIPTION


- With TO-220F package
- Complement to type 2SC4511

APPLICATIONS

- Audio and general purpose

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

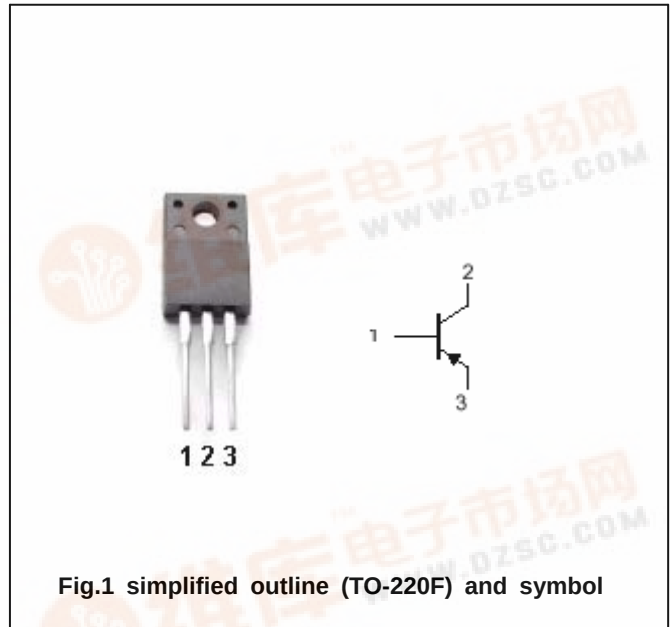

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-80	V
V_{CEO}	Collector-emitter voltage	Open base	-80	V
V_{EBO}	Emitter-base voltage	Open collector	-6	V
I_C	Collector current		-6	A
I_B	Base current		-3	A
P_C	Collector dissipation	$T_C=25^\circ\text{C}$	30	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SA1725

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-25mA ; I _B =0	-80			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-2A ; I _B =-0.2A			-0.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-80V; I _E =0			-10	μ A
I _{EBO}	Emitter cut-off current	V _{EB} =-6V; I _C =0			-10	μ A
h _{FE}	DC current gain	I _C =-2A ; V _{CE} =-4V	50		180	
C _{OB}	Output capacitance	I _E =0; V _{CB} =-10V; f=1MHz		150		pF
f _T	Transition frequency	I _E =0.5A ; V _{CE} =-12V		20		MHz

Switching times

t _{on}	Turn-on time	I _C =-3.0A; I _{B1} =-I _{B2} =-0.3A V _{CC} =-30V , R _L =10 Ω		0.18		μ s
t _s	Storage time			1.10		μ s
t _f	Fall time			0.21		μ s


◆ h_{FE} Classifications

O	P	Y
50-100	70-140	90-180

Silicon PNP Power Transistors

2SA1725

PACKAGE OUTLINE

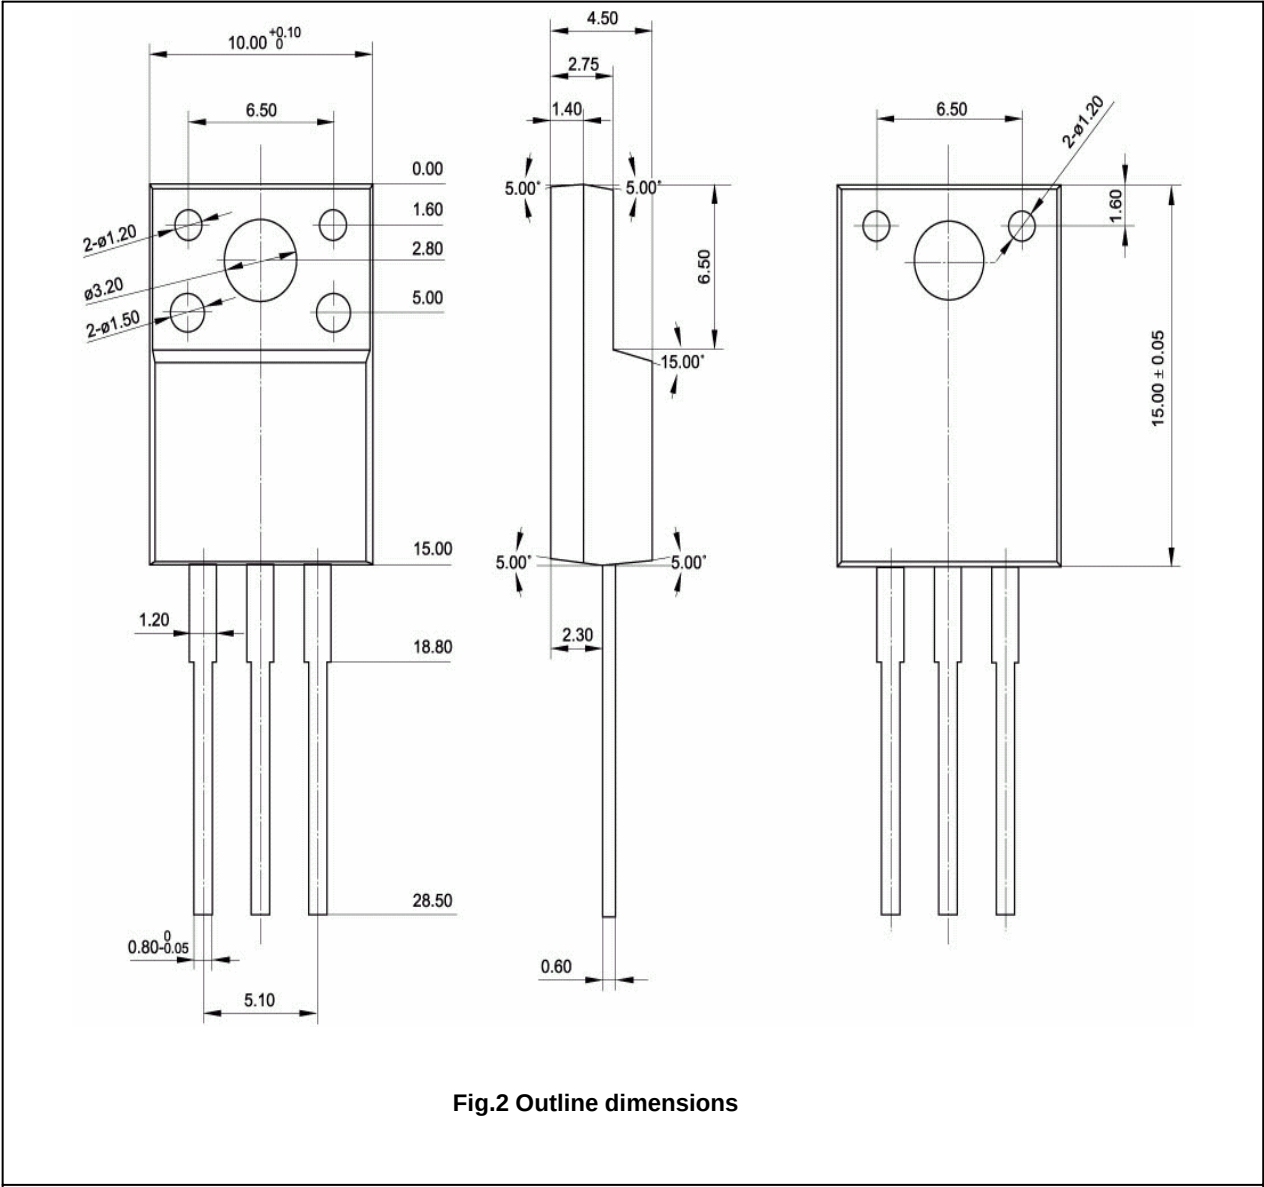

Silicon PNP Power Transistors

2SA1725

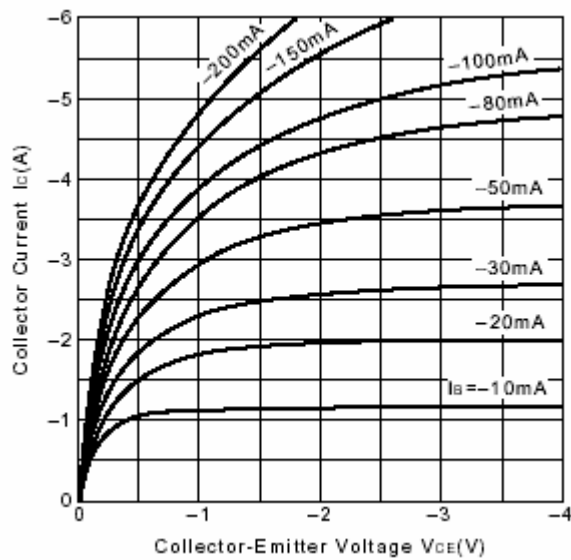


Fig.3 Static Characteristic

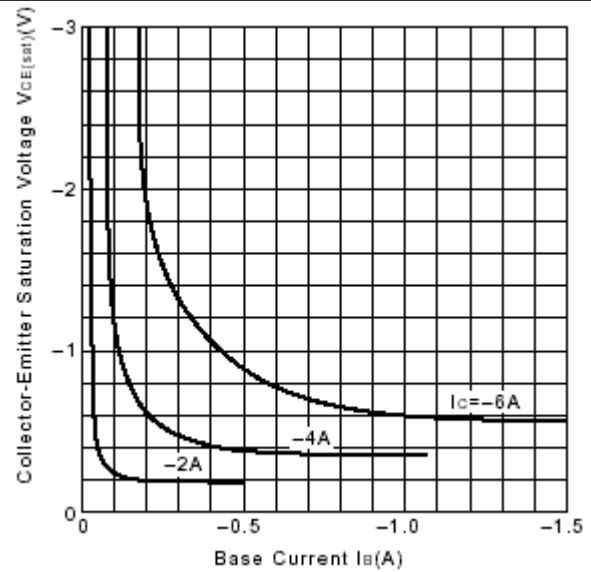
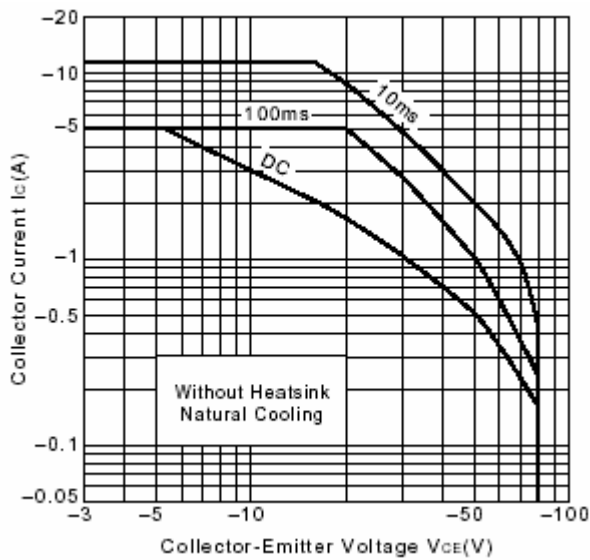
Fig.4 $V_{CE(sat)}$ - I_B Characteristics

Fig.5 Safe Operating Area

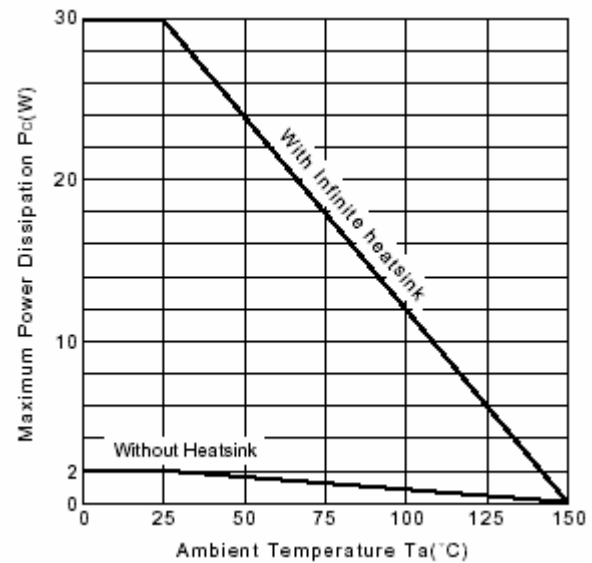
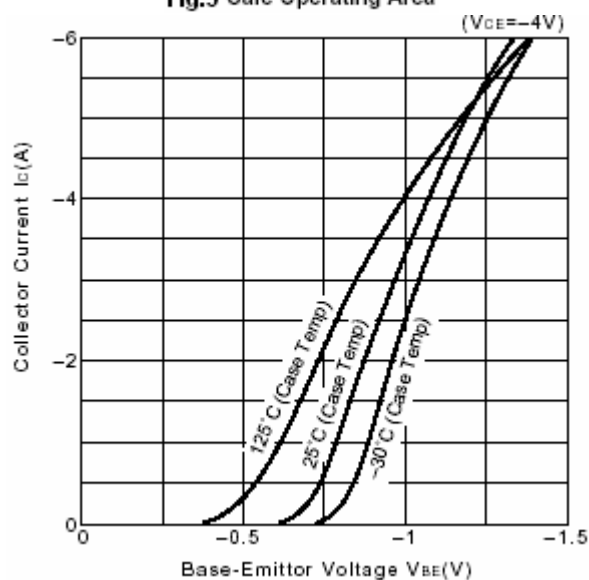
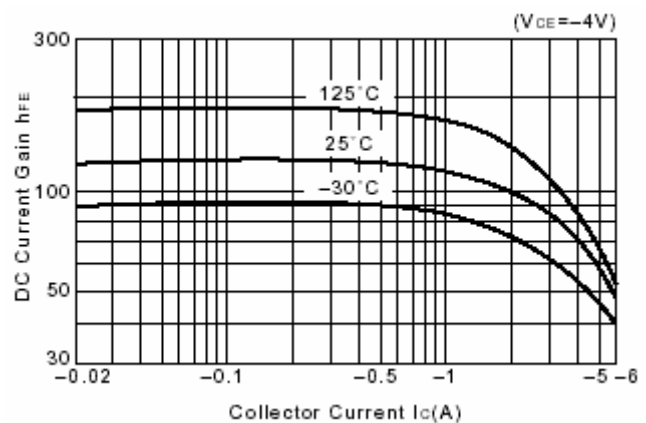
Fig.6 P_c - T_a DeratingFig.7 I_C - V_{BE} 

Fig.8 DC current Gain