

INCHANGE Semiconductor

isc Product Specification

isc Silicon NPN Darlington Power Transistor

2SD1162

DESCRIPTION



- High DC Current Gain-  
:  $h_{FE} = 400(\text{Min.}) @ I_C = 2A$
- High Switching Speed
- Low Collector Saturation Voltage

APPLICATIONS

- Designed for high voltage, low speed switching industrial use.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	500	V
$V_{CEO}$	Collector-Emitter Voltage	300	V
$V_{EBO}$	Emitter-Base Voltage	10	V
$I_C$	Collector Current-Continuous	5	A
$I_{CM}$	Base Current-Peak	10	A
$I_B$	Base Current-Continuous	0.5	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	40	W
	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	1.5	
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

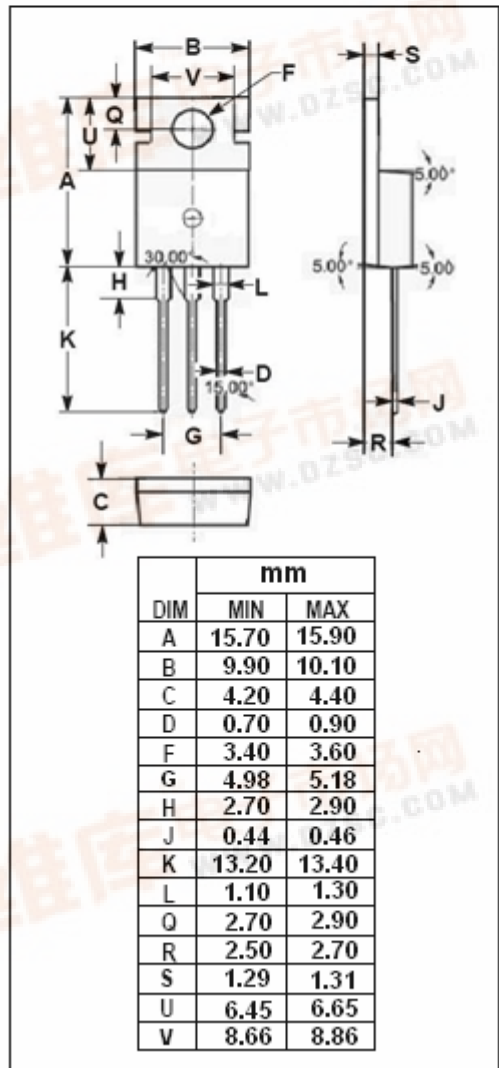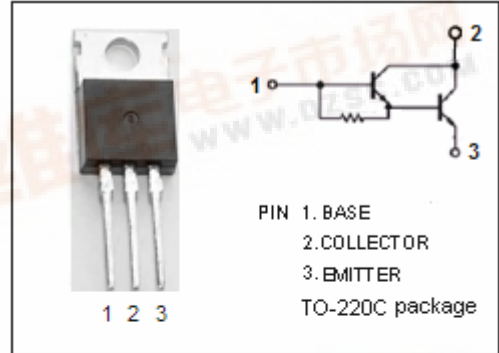

**isc Silicon NPN Darlington Power Transistor****2SD1162****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	300			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=5\text{mA}$			1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=5\text{mA}$			2.0	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=400\text{V}; I_E=0$			10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C=2\text{A}; V_{CE}=2\text{V}$	400		3000	
$h_{FE-2}$	DC Current Gain	$I_C=3\text{A}; V_{CE}=2\text{V}$	100			

## Switching Times

$t_{on}$	Turn-On Time	$I_C=3\text{A}; I_{B1}=-I_{B2}=30\text{mA};$ $R_L=50\Omega, V_{CC}\approx 150\text{V}$		1.0		$\mu\text{s}$
$t_s$	Storage Time			12		$\mu\text{s}$
$t_f$	Fall Time			6		$\mu\text{s}$

◆  $h_{FE-1}$  Classifications

M	L	K
400-800	600-1200	1000-3000