





BOE100LH TO18 Plastic IR Emitter Leaded Housing

DESCRIPTION


The BOE100 is a 880nm AlGaAs LED encapsulated in a clear, purple tinted plastic TO46 package housed in a clip in Polycarbonate housing with 750mm leads

FEATURES

- Min/max radiated power density selection.
- Good optical to mechanical alignment
- High radiance level.
- Clip in housing with flying leads.

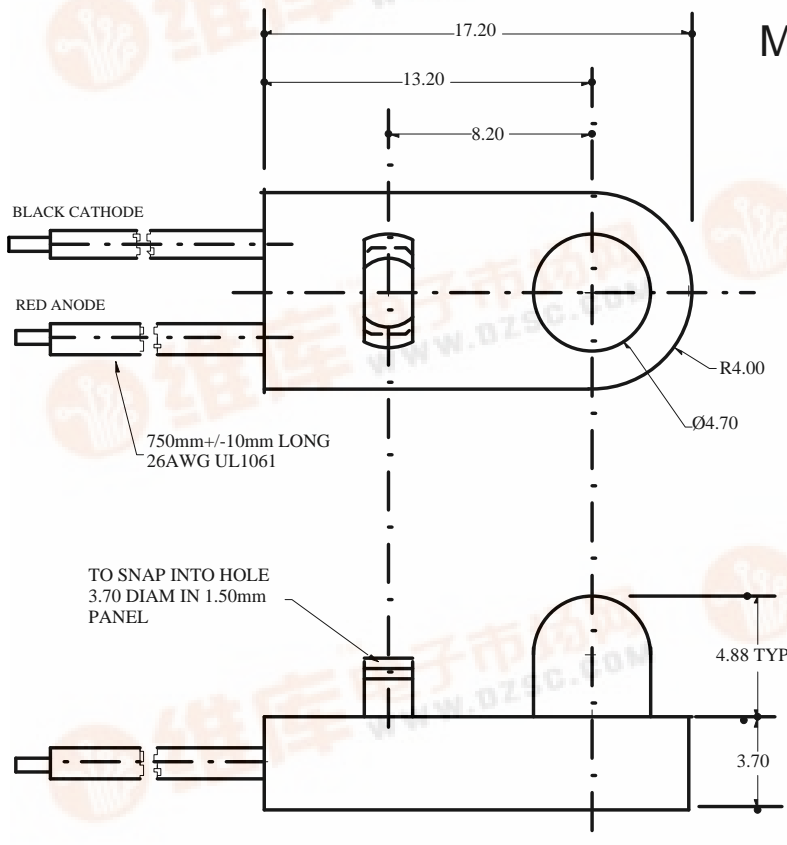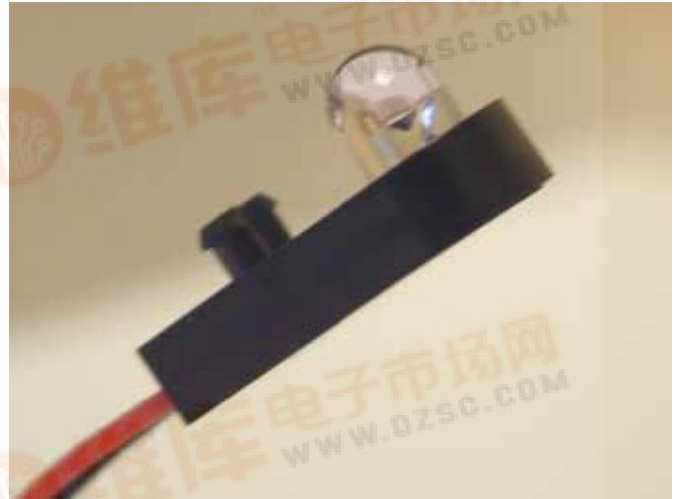

MECHANICAL DATA

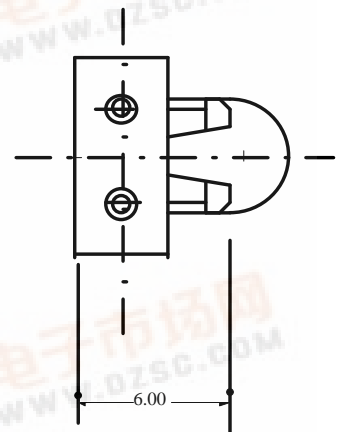

- NOTES
- 1 HOUSING MATERIAL BLACK POLYCARBONATE.
 - 2 TOLERANCE X.XX +/-0.13
X.X +/-0.5
 - 3 DIMENSION mm


BEDFORD OPTO TECHNOLOGY LTD

BIGGAR BUSINESS PARK, BIGGAR, LANARKSHIRE, ML12 6FX

Tel: +44 (0) 1899 221221 Fax: +44 (0) 1899 221009

Website: bot.co.uk E-mail: bill@bot.co.uk



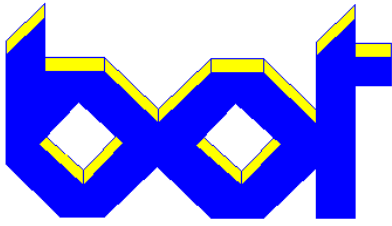

BOE100LH TO18 Plastic IR Emitter Leaded Housing

ABSOLUTE MAXIMUM RATINGS (25°C unless

| | |
|-----------------------------------|------------------------|
| STORAGE TEMP | -40 C TO +100°C |
| OPERATING TEMP | -40 C TO 100°C |
| CONTINUOUS FORWARD CURRENT | 100mA |
| REVERSE VOLTAGE | 5.0V |
| POWER DISSIPATION | 200mW (1) |
| LEAD SOLDERING TEMPERATURE (Iron) | 240°C for 5secs(2,3,5) |
| LEAD SOLDERING TEMPERATURE9(Flow) | 260°C for 10secs |

OPTO ELECTRONIC DATA(Ta=25°C unless stated)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|---|----------------|-----|-----|------|---------|-----------------|
| Forward Voltage | Vf | | | 1.70 | V | If = 20mA |
| Reverse leakage Current | Ir | | | 10 | µA | Vr=5.0V |
| Peak Emission Wavelength | λp | | 880 | | nm | If=20mA |
| Emission Angle at ½ Radiated Power Density. | Θ | | ±35 | | deg | |
| Radiant incidence | E _o | 16 | | 26 | mW/sqcm | If=100mA(6,7) |

NOTES

1. Derate power dissipation linearly at 2.7mW/°C above 25°C.
2. RMA flux is recommended.
3. Methonal or Isopropylalcohols are recommended as cleaning agents.
4. Solder iron tip 1.6mm minimum from housing.
5. Leads not to be under stress or tension.
6. Measurement taken at the end of a 100µS pulse.
7. E_o is a measure of the average apertured radiant energy incident upon a sensing area 6.35mm diameter perpendicular to and centred on the mechanical axis of the lens and 10.7mm from the measurement surface. E_o is not necessarily uniform within the measurement area.

BEDFORD OPTO TECHNOLOGY LTD
1,BIGGAR BUSINESS PARK, BIGGAR,LANARKSHIRE, ML12 6FX
 Tel: +44 (0) 1899 221221 Fax: +44 (0) 1899 221009
 Website: bot.co.uk E-mail: bill@bot.co.uk