





okpac®

**SUPPORT DE RELAIS  
SLIM  
SLIM SOCKET**


**ESD01000**

Compatible avec les relais électromécaniques et les relais statiques **celduc** sortie continue SLD et sortie alternative SLA.

Compatible with Electromechanical Relays and **celduc** solid state relays with DC output SLD and AC output SLA

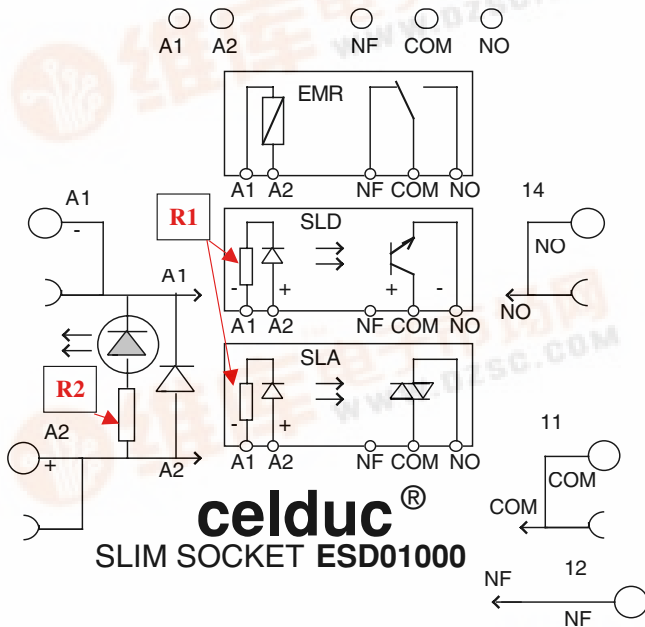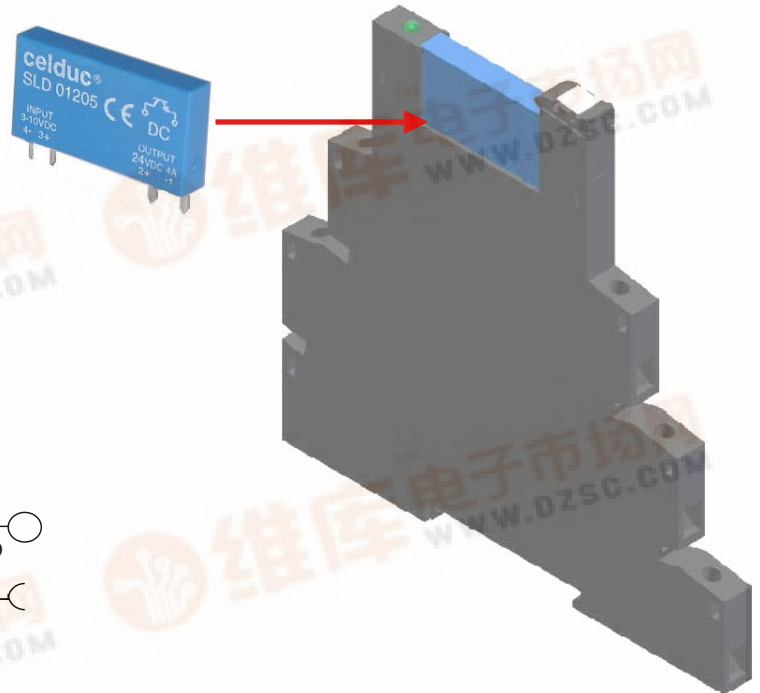

| <b>celduc</b><br>SSR<br>References | Commande/<br>Input control<br>A1 - A2 | Sortie /Output<br>COM - NO | Input<br>Resistance<br>R1 // R2<br>(Ohms) | Input<br>Current |
|------------------------------------|---------------------------------------|----------------------------|---|------------------|
| <b>SLD01205</b>                    | 3-10VDC                               | 24VDC 4A                   | 300Ω                                      | 13mA @ 5VDC      |
| <b>SLD02205</b>                    | 7-20VDC                               | 24VDC 4A                   | 900Ω                                      | 12mA @ 12VDC     |
| <b>SLD03205</b>                    | 18-32VDC                              | 24VDC 4A                   | 1850Ω                                     | 12,5mA @ 24VDC   |
| <b>SLD01210</b>                    | 3-10VDC                               | 48VDC 2,5A                 | 300Ω                                      | 13mA @ 5VDC      |
| <b>SLD02210</b>                    | 7-20VDC                               | 48VDC 2,5A                 | 900Ω                                      | 12mA @ 12VDC     |
| <b>SLD03210</b>                    | 18-32VDC                              | 48VDC 2,5A                 | 1850Ω                                     | 12,5mA @ 24VDC   |
| <b>SLA01220</b>                    | 3-10VDC                               | 12-280VAC 2A               | 300Ω                                      | 13mA @ 5VDC      |
| <b>SLA02220</b>                    | 7-20VDC                               | 12-280VAC 2A               | 900Ω                                      | 12mA @ 12VDC     |
| <b>SLA03220</b>                    | 18-32VDC                              | 12-280VAC 2A               | 1850Ω                                     | 12,5mA @ 24VDC   |

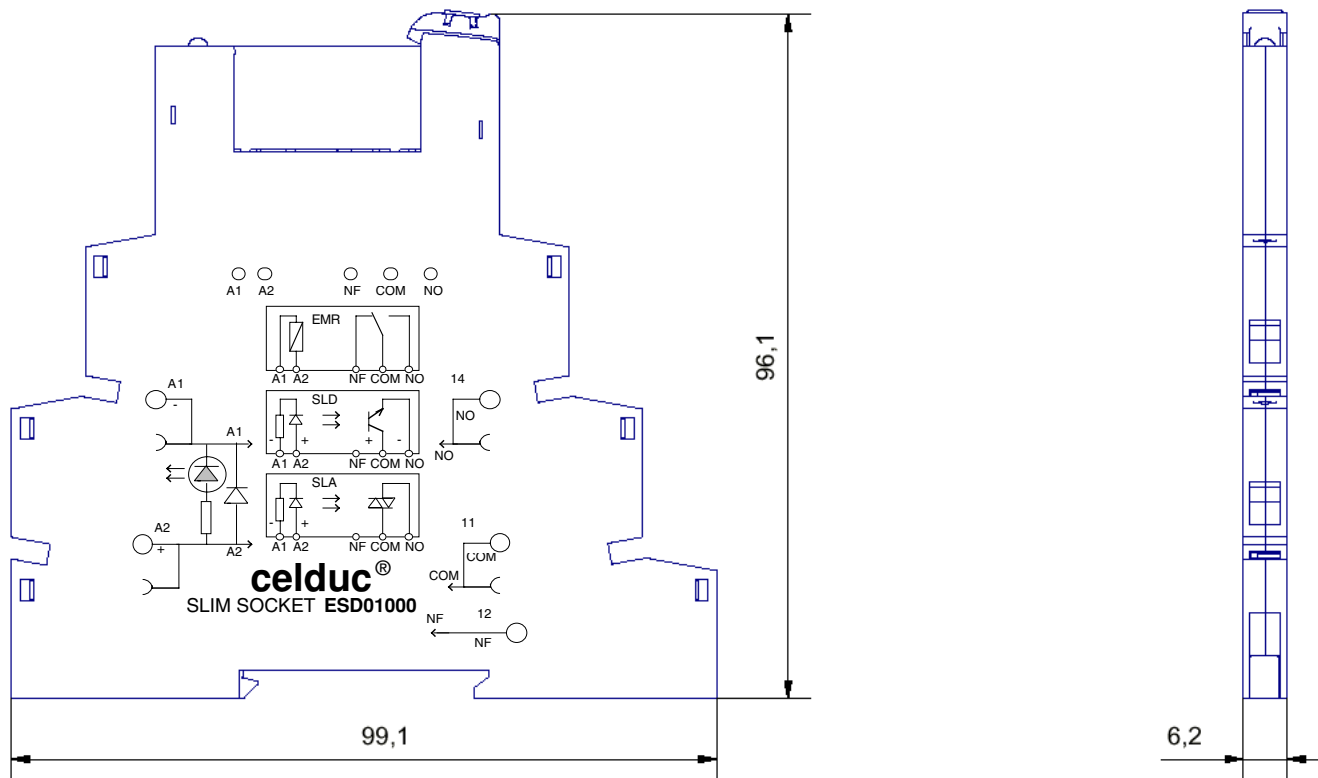


Raccordement/Connections

Section max de fil / Max. wire : 2,5 mm<sup>2</sup> / AWG 14

Tournevis / Screwdriver type : 2,5 x 0,5 mm

Couple de serrage / Screws torque : 0,5 Nm



Plastique / Plastic Materials :

Material Designation: **Grilon TS V0**

Product Description: Polyamide 66/6 (PA66/6), designated "Grilon" furnished as pellets.

| Color | Min. Thick. (mm) | Flame Class | HWI | HAI | RTI Elec | RTI Imp | RTI Str | IEC GWIT | IEC GWFI |
|-------|------------------|-------------|-----|-----|----------|---------|---------|----------|----------|
| ALL   | 0.4              | V-0         | 4   | 0   | 125      | -       | -       | -        | -        |
|       | 0.8              | V-0         | 4   | 0   | 125      | 105     | 120     | -        | -        |
|       | 1.5              | V-0         | 3   | 0   | 125      | 105     | 120     | -        | 960      |
|       | 3.0              | V-0         | 2   | 0   | 125      | 105     | 120     | -        | 960      |

CTI: 0

IEC CTI: -

HVTR: 0

D495: 5

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -  
ISO Tensile Strength (MPa): -  
ISO Tensile Impact (kJ/m<sup>2</sup>): -

Volume Resistivity (10<sup>12</sup>ohm-cm): -  
ISO Flexural Strength (MPa): -  
ISO Izod Impact (kJ/m<sup>2</sup>): -

Dimensional Stability (%): -  
ISO Heat Deflection (°C): -  
ISO Charpy Impact (kJ/m<sup>2</sup>): -

Report Date: 2/24/1998

Underwriters Laboratories Inc®

