

- **30 A current rating**
- **Input voltage range: 8 Vdc to 14 Vdc**
- **Output voltage range: 0.8 Vdc to 3.63 Vdc**
- **Ultra high efficiency: 93% @ 12 Vin and 3.3 Vout**
- **Extremely low internal power dissipation**
- **Minimal thermal design concerns**
- **Designed in reliability: MTBF of 4,435,000 hours per Telcordia SR-332**
- **Ideal solution where board space is at a premium or tighter card pitch is required**
- **Available RoHS compliant**

NEW Product



The SIL30E series are non-isolated dc-dc converters packaged in a single-in-line footprint giving designers a cost effective solution for conversion from a 12 V source. The SIL30E has a wide input range (8 Vdc to 14 Vdc) and offers a wide 0.8 Vdc to 3.63 Vdc output voltage range with a 30 A load, which allows for maximum design flexibility and a pathway for future upgrades. The SIL30E is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface-mount technology and automated manufacturing techniques, the SIL30E offers compact size and efficiencies of up to 93%.



2 YEAR WARRANTY

All specifications are typical at 12 Vin and 1.5 Vout, full load at 25 °C unless otherwise stated
 $C_{out} = 100 \mu F$

SPECIFICATIONS

OUTPUT SPECIFICATIONS

| | | |
|--|---------------------|--|
| Voltage adjustability | 0.8-3.63 Vdc | |
| Setpoint accuracy | ±1.3% typ. | |
| Line regulation | ±0.2% typ. | |
| Load regulation | ±1.5% typ. | |
| Total error band | ±3.0% typ. | |
| Minimum load | 0 A | |
| Overshoot/undershoot | None | |
| Ripple and noise | 5 Hz to 20 MHz | 50 mV pk-pk 25 mV rms |
| Temperature coefficient | ±0.01% /°C | |
| Transient response Slew rate = 0.5 A/μs | Vout = 1.5 V | 50% to 75% load step 3% max. deviation 10 μs recovery to within ±1.0% |
| Remote sense | 10% Vo compensation | |

EMC CHARACTERISTICS

| | |
|-------------------------|-----------------------|
| Electrostatic discharge | EN61000-4-2, IEC801-2 |
| Conducted immunity | EN61000-4-6 |
| Radiated immunity | EN61000-4-3 |

GENERAL SPECIFICATIONS

| | | |
|-------------------------|---|-----------------|
| Efficiency | @ 12 Vin, 3.3 Vout | 93% typ. |
| Insulation voltage | Non-isolated | |
| Switching frequency | Fixed | 1.3 MHz typ. |
| Approvals and standards | EN60950-1 UL/cUL60950-1 | |
| Material flammability | UL94V-0 | |
| Dimensions (LxWxH) | 50.84 x 7.80 x 12.70 mm 2.000 x 0.307 x 0.500 inches | |
| Pin length | 0.140 in (3.56 mm) | |
| Weight | 7.0 g (0.25 oz) | |
| MTBF | Telcordia SR-332 | 4,435,000 hours |

INPUT SPECIFICATIONS

| | | |
|------------------------|--|--------|
| Input voltage range | 8-14 Vdc | |
| Input current | No load (max.) | 250 mA |
| Input current (max.) | 9.2 A max. @ Io max. and Vout = 3.3 V | |
| Input reflected ripple | 220 mA rms | |
| Remote ON/OFF | (See Note 1) | |
| Start-up time | 20 ms | |

ENVIRONMENTAL SPECIFICATIONS

| | | |
|---------------------|---|---------------------------------------|
| Thermal performance | Operating ambient, temperature Non-operating | -40 °C to +85 °C -40 °C to +125 °C |
|---------------------|---|---------------------------------------|


PROTECTION

| | |
|---------------|--------------------|
| Short-circuit | Continuous |
| Thermal | Automatic recovery |

| OUTPUT POWER (MAX.) | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT (MIN.) | OUTPUT CURRENT (MAX.) | EFFICIENCY (TYP.) | REGULATION | MODEL NUMBER ^(2,3) |
|---------------------|---------------|----------------|-----------------------|-----------------------|-------------------|------------|-------------------------------|
| | | | | LINE | LOAD | | |
| 99 W | 8-14 Vdc | 0.8-3.63 Vdc | 0 A | 30 A | 93% | ±0.2% | ±1.5% SIL30E-12W3V3-VJ |

Part Number System with Options

SIL30E-12W3V3-VJ

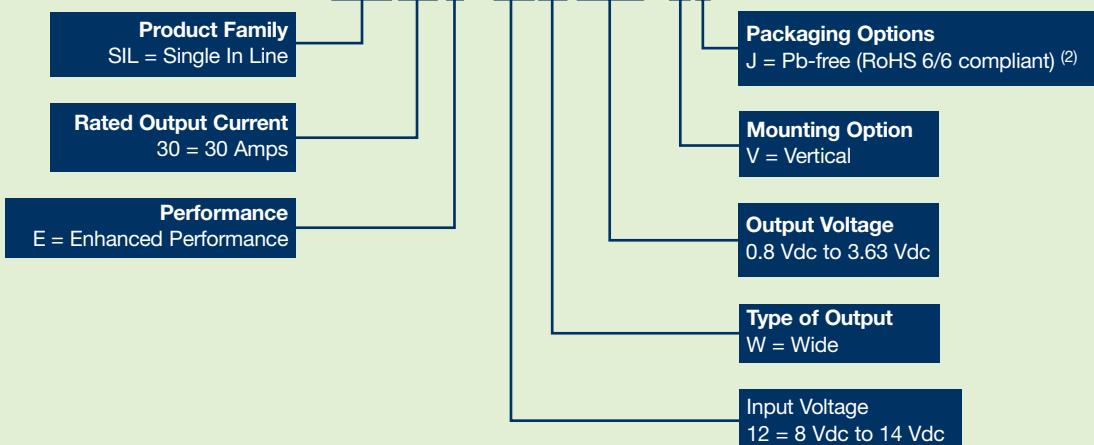

Output Voltage Adjustment of the SIL30E-12W3V3 Series

The ultra-wide output voltage trim range offers major advantages to users who select the SIL30E-12W3V3. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SIL30E-12W3V3 converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Notes

1 The SIL30E features a 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.

The following conditions apply for the SIL30E:

| Configuration | Converter Operation |
|--|---------------------|
| Remote pin open circuit | Unit is ON |
| Remote pin pulled low [Von/off < 0.8 V] | Unit is OFF |
| Remote pin pulled high [Von/off > 2.8 V] | Unit is ON |

A 'Negative Logic' Remote ON/OFF version is also possible with this converter. Please consult the factory for details.

2 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.

3 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

Notes

A The derating curve represents the condition at which internal components are within the Artesyn derating guidelines.

B Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

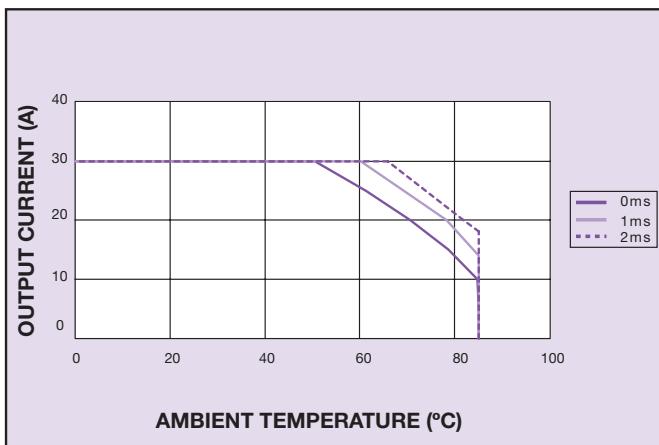


Figure 1 - Derating Curve
Vin = 12 V, Output Voltage = 1.5 V (See Note A)

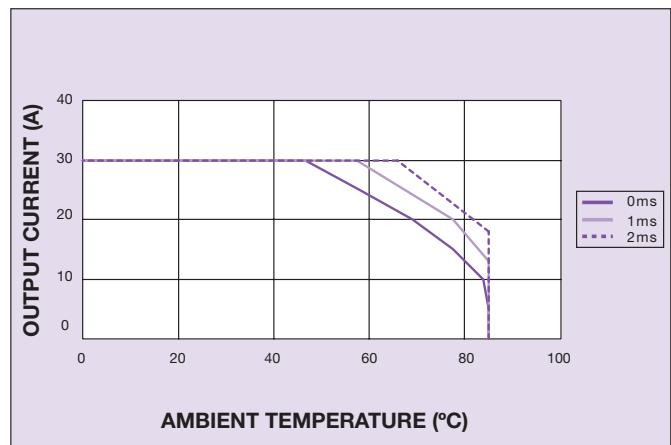


Figure 2 - Derating Curve
Vin = 12 V, Output Voltage = 1.8 V (See Note A)

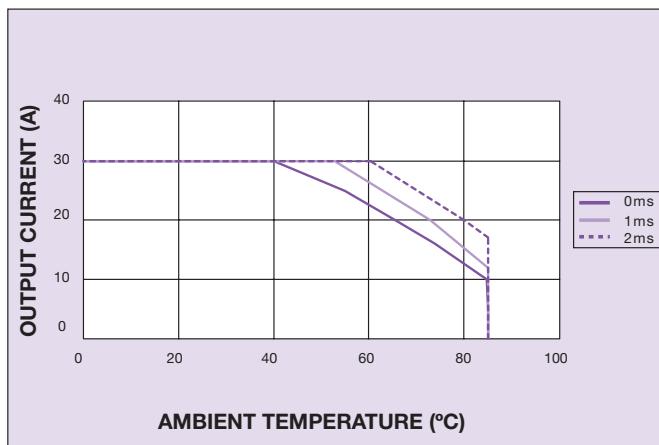


Figure 3 - Derating Curve
Vin = 12 V, Output Voltage = 2.5 V (See Note A)

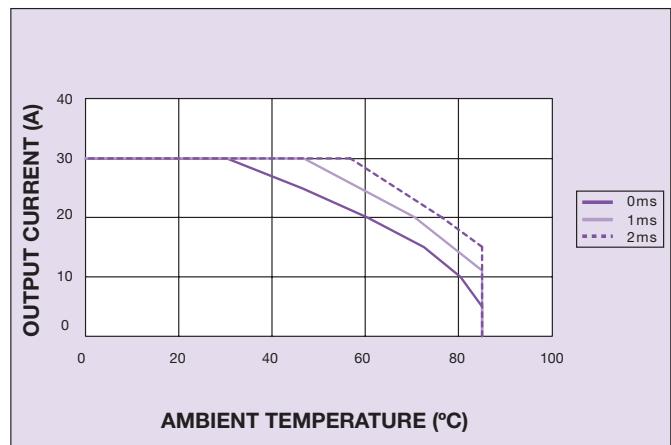


Figure 4 - Derating Curve
Vin = 12 V, Output Voltage = 3.3 V (See Note A)

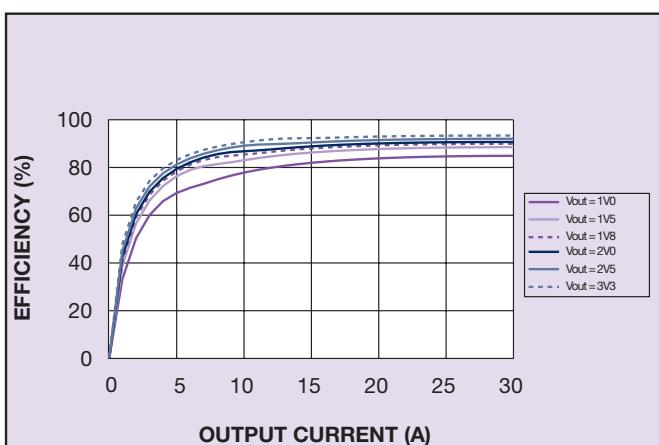


Figure 5 - Efficiency vs Load Current


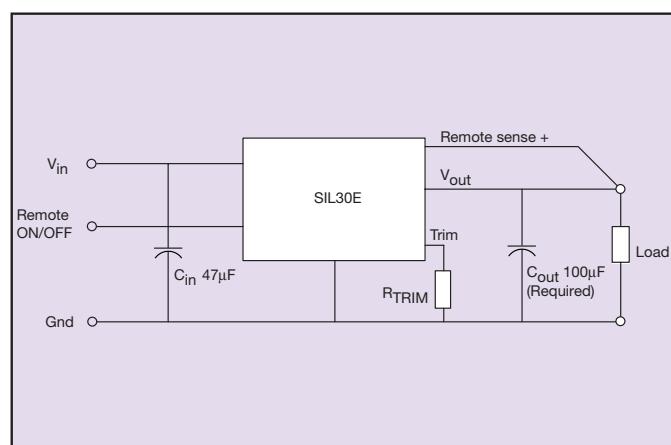


Figure 6 - Standard Application

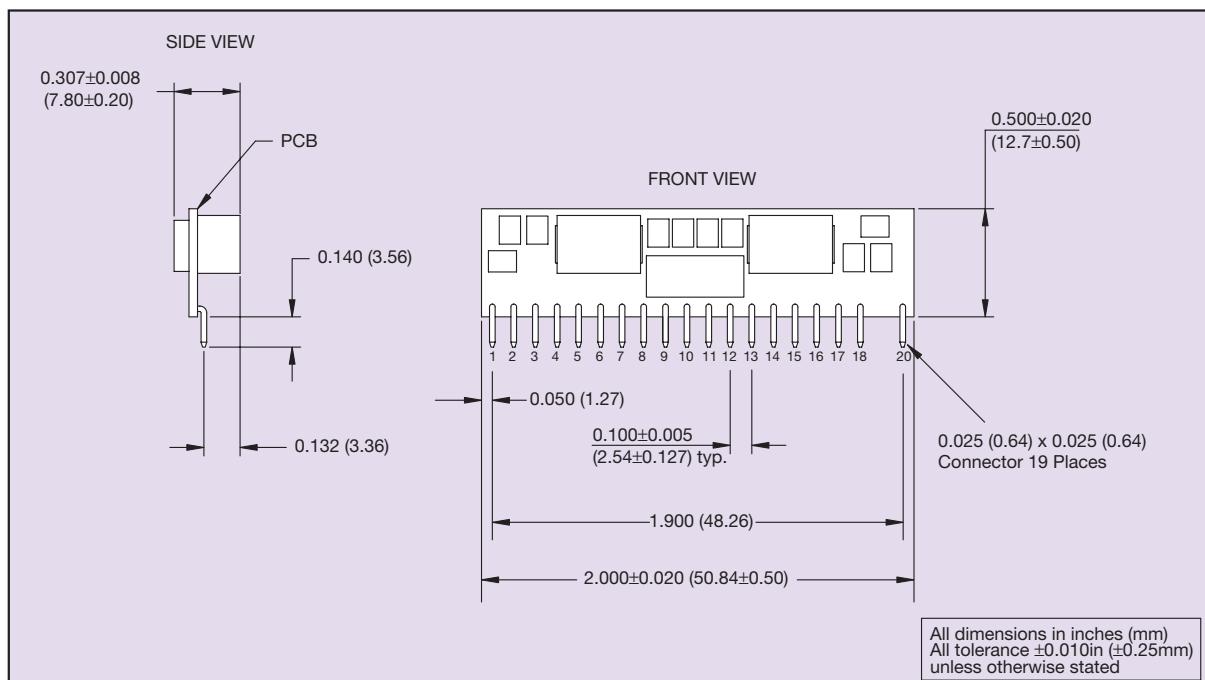

| PIN CONNECTIONS | | | |
|-----------------|---------------|---------|---------------|
| PIN NO. | FUNCTION | PIN NO. | FUNCTION |
| 1 | Vin | 11 | Vout |
| 2 | Vin | 12 | Vout |
| 3 | Ground | 13 | Remote ON/OFF |
| 4 | Ground | 14 | Ground |
| 5 | Trim | 15 | Ground |
| 6 | Remote Sense+ | 16 | Ground |
| 7 | Ground | 17 | Ground |
| 8 | Ground | 18 | Vin |
| 9 | Vout | 19 | N/C |
| 10 | Vout | 20 | Vin |

Figure 7 - Mechanical Drawing and Pinout Table