

Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance ¹	3.3		mH
DCR (Per winding)		0.3	Ω
Current ²		2.0	A _{RMS}
Leakage Inductance ¹		40	μH
Interwinding capacitance ¹		20	pF
SRF	500 kHz Typ.		

Rated Voltage 250 VAC, 50/60 Hz.

Hipot (Isolation) 2000 VAC.


Insulation Resistance 100MΩ @ 500V

Temperature Rise 55°C Max.


Operating Temperature Range -25°C to +60°C.

1. Inductance tested at 100mV_{RMS} and 10 kHz
2. Rated current: Specified at max. temp. rise.

Physical Dimensions
inches (mm)

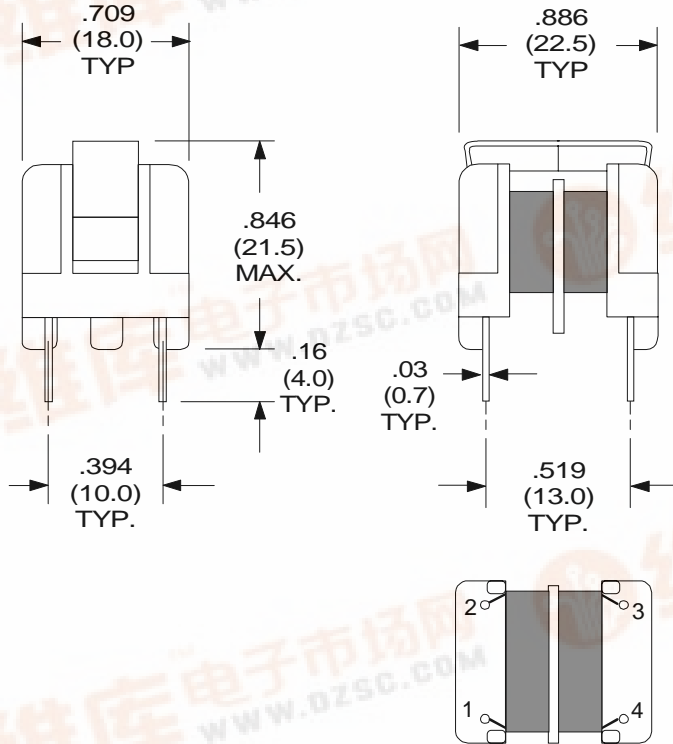

Schematic Diagram



RHOMBUS P/N: **L-1012**

CUST P/N:

NAME:

DATE: **5/05/01**

SHEET: 1 OF 1

