

Inchange Semiconductor

Product Specification

Silicon NPN Power Transistors

2SC4927

DESCRIPTION

- With TO-3PML package
- Built-in damper diode
- High breakdown voltage

APPLICATIONS

- TV/Character display horizontal deflection output applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

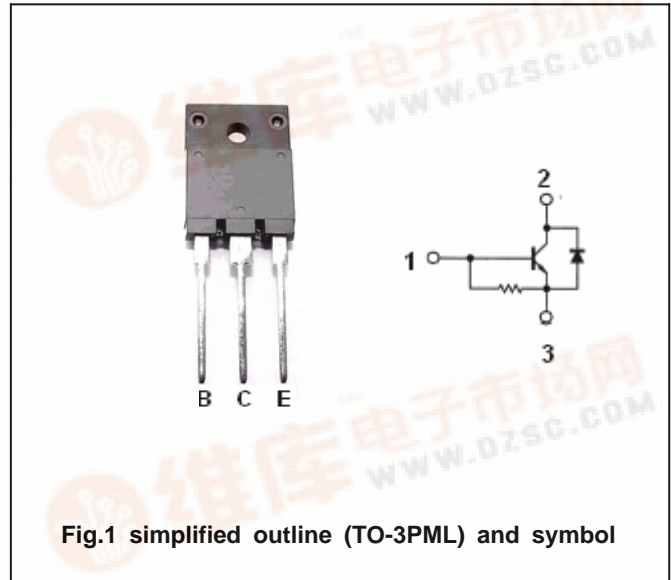


Fig.1 simplified outline (TO-3PML) and symbol

Absolute maximum ratings(T_a=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CEO}	Collector-emitter voltage	Open base	1500	V
V _{EBO}	Emitter-base voltage	Open collector	6	V
I _C	Collector current		8	A
I _{C(peak)}	Collector current-peak		9	A
I _{C(surge)}	Collector current-surge		18	A
I _o	C to E diode forward current		8	A
P _C	Collector power dissipation	T _C =25°C	50	W
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon NPN Power Transistors

2SC4927

CHARACTERISTICS


T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =500mA ; I _C =0	6			V
I _{CES}	Collector cut-off current	V _{CE} =1500V; R _{BE} =0			0.5	mA
h _{FE}	DC current gain	I _C =1A ; V _{CE} =5V			25	
V _{CE(sat)}	Collector-emitter saturation voltage	I _C =6A ; I _B =1.2A			5	V
V _{BE(sat)}	Base-emitter saturation voltage	I _C =6A ; I _B =1.2A			1.5	V
V _{ECF}	Diode forward voltage	I _F =8A			2.0	V
t _f	Fall time	I _{CP} =6A; f _H =31.5kHz I _{B1} =1.2A; I _{B2} =-2.4A			0.5	μ s

Silicon NPN Power Transistors

2SC4927

PACKAGE OUTLINE

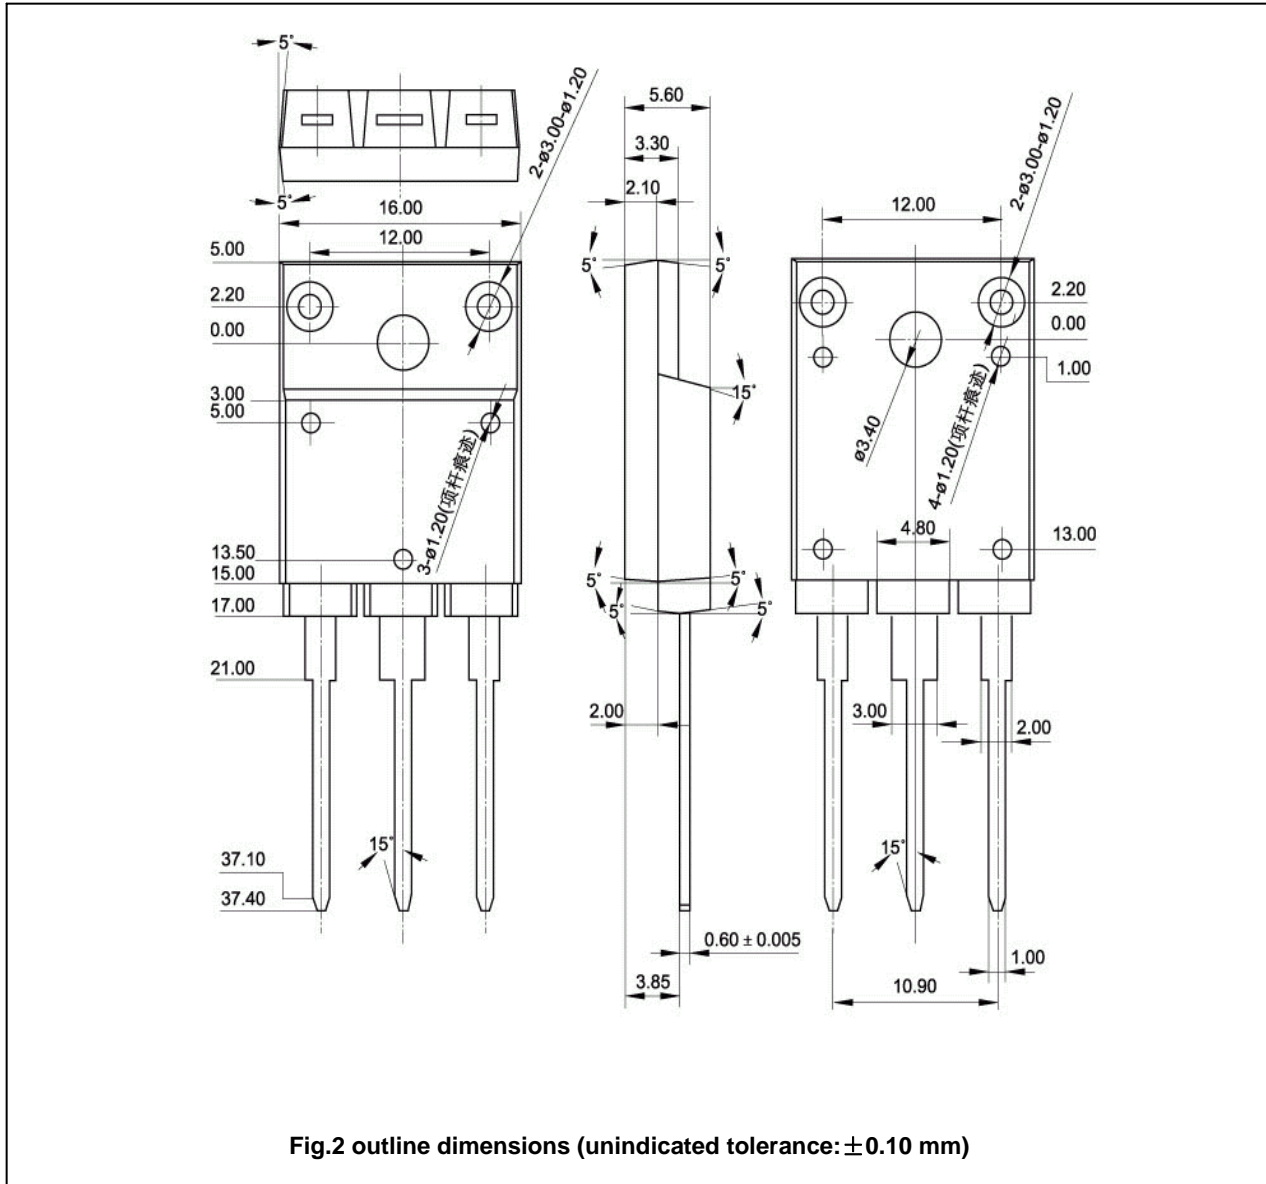

Silicon NPN Power Transistors

2SC4927

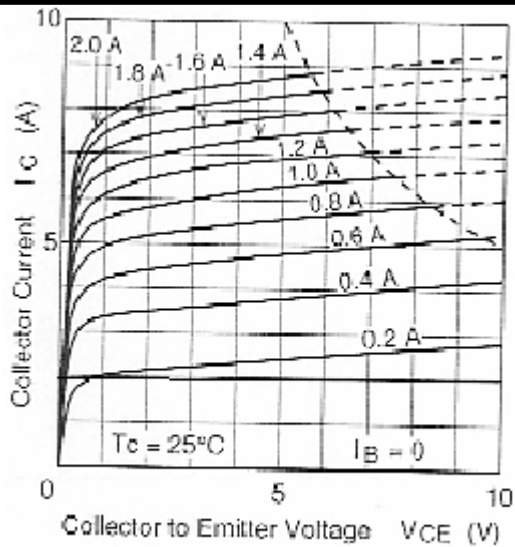


Fig.3 Static Characteristic

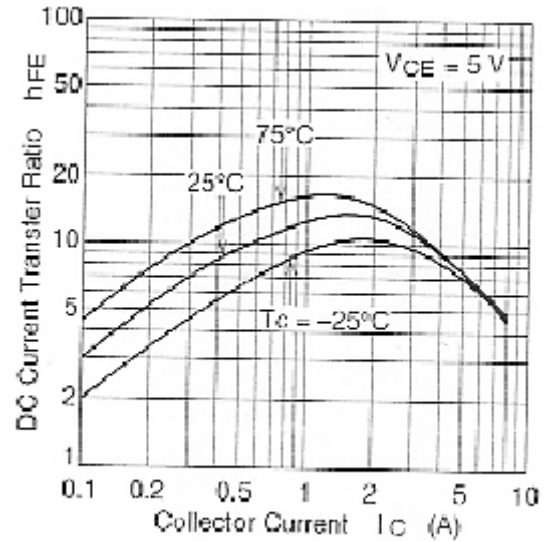


Fig.4 DC current Gain

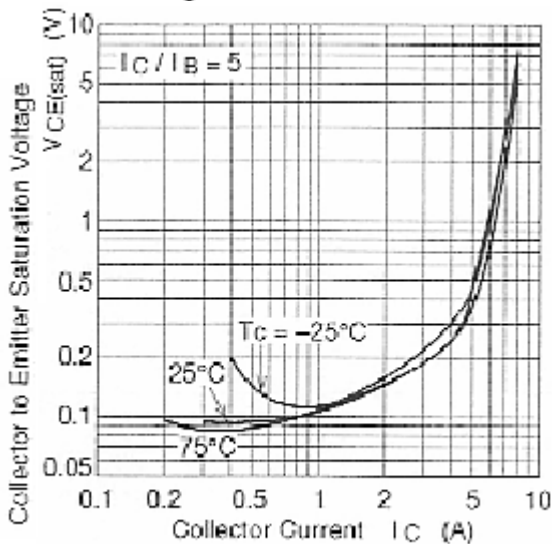


Fig.5 Collector-Emitter Saturation Voltage

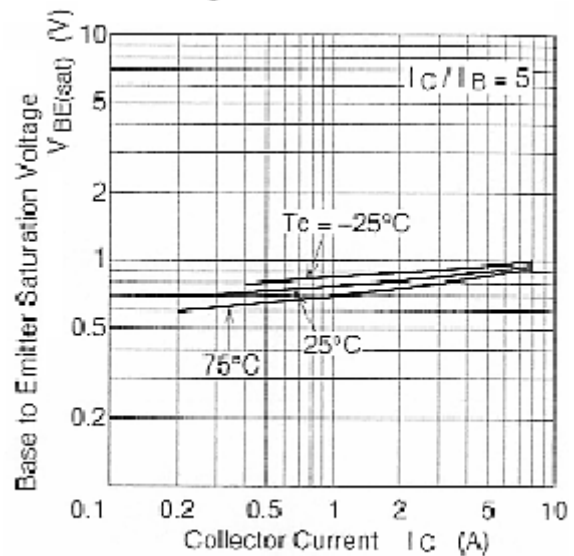


Fig.6 Base-Emitter Saturation Voltage

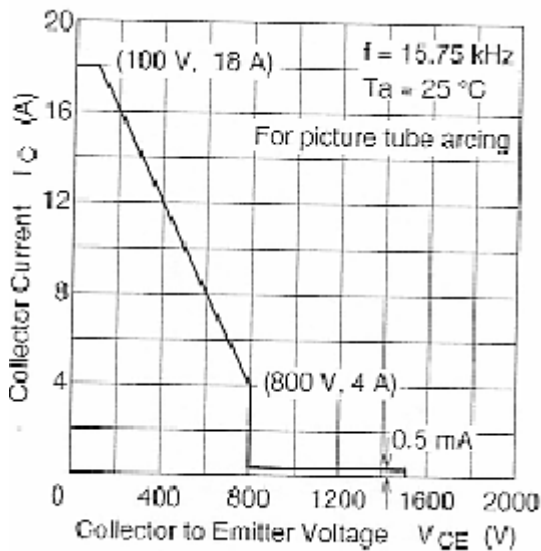


Fig.7 Safe Operating Area