

**Inchange Semiconductor**

**Product Specification**

**Silicon NPN Power Transistors**

**2SD1168**

**DESCRIPTION**


- With TO-3 package
- High voltage ,high speed
- Wide area of safe operation

**APPLICATIONS**

- For switching regulator applications

**PINNING(see fig.2)**

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

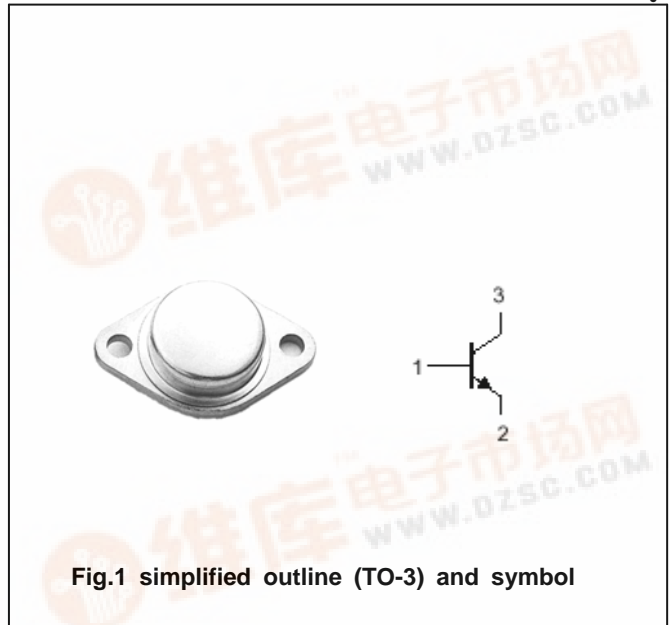

**Absolute maximum ratings(Ta=℃)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	1500	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	800	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	5	V
I <sub>C</sub>	Collector current		5	A
I <sub>CM</sub>	Collector current-peak		10	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25℃	50	W
T <sub>j</sub>	Junction temperature		150	℃
T <sub>stg</sub>	Storage temperature		-65~150	℃

## Silicon NPN Power Transistors

## 2SD1168

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CER(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =5A; R <sub>BE</sub> =10Ω; L=2mH	800			V
V <sub>(BR)EBO</sub>	Emitter-base breakdown voltage	I <sub>E</sub> =1mA; I <sub>C</sub> =0	5			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =2A; I <sub>B</sub> =1A			1.0	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =2A; I <sub>B</sub> =1A			1.5	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =750V; I <sub>E</sub> =0			0.1	mA
		V <sub>CB</sub> =1500V; I <sub>E</sub> =0			1.0	
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =1A; V <sub>CE</sub> =4V	9		25	
t <sub>f</sub>	Fall time	I <sub>C</sub> =1.5A; I <sub>B1</sub> =0.2A; I <sub>B2</sub> =-0.7A			0.5	μs
t <sub>s</sub>	Storage time			2		μs

◆ h<sub>FE</sub> Classifications

Q	P
9-18	15-25

Silicon NPN Power Transistors

2SD1168

PACKAGE OUTLINE

