

Digital Audio Transformer


T-881

Turns Ratio ($\pm 2\%$)

1:1

PARAMETER	MIN.	MAX.	UNITS
¹ Open Circuit Inductance	225		μHy
² Leakage Inductance		0.4	μHy
² Interwinding Capacitance ($C_{W/W}$)		15	pF
DC Resistance (any winding)		0.1	ohms
Isolation (HI-POT)	1500		V_{RMS}
TEST CONDITIONS: ¹ Oscillation Voltage = 100mV Oscillation Frequency = 10.0 KHz ² Oscillation Frequency = 100.0 KHz Oscillation Voltage = 100mV			

SCHEMATIC
DIAGRAM

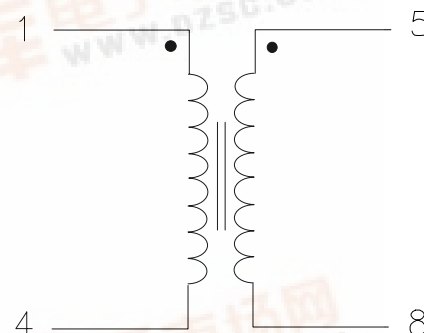


Parts shipped in anti-static tubes. 50 pieces per tube

Tape & Reel Available

Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.

PHYSICAL DIMENSIONS
inches (mm)

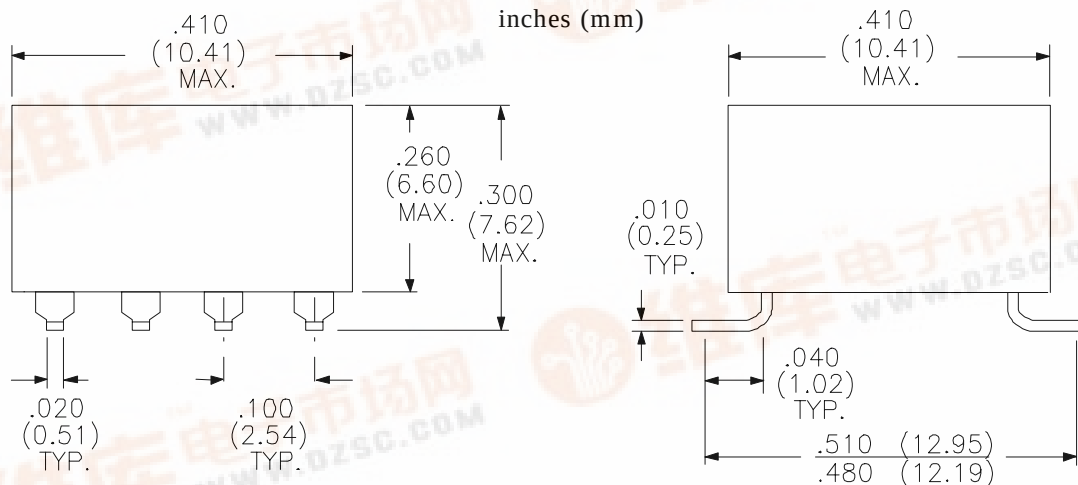

RHOMBUS P/N: **T-881**

CUST P/N:

NAME:

DATE: **11/28/96**

SHEET: 1 OF 1