

2300 Series

Photoelectronic Smoke Detector with Electronic Heat Sensing



System Sensor's new 2300 Series Photoelectronic Smoke Detector with Electronic Heat Sensing features 12 and 24 volt operation in one unit. Model 2300T (2-Wire) and Model 2312/24T (4-Wire) are designed with pleasing aesthetics; the housing is 15% smaller than many competitive units. Thermistor technology coupled with System Sensor's patented optical chamber make this new series detector exceptionally reliable. Installation is simple and cost effective — pre-wire the harnesses and snap the detectors into place.

- One Unit Features Both 12 and 24 VDC Operation
- 2-Wire and 4-Wire Models Available
- Aesthetically Pleasing Low Profile Design
- Geometrically Optimized Photoelectronic Sensing Chamber
 - Built-in Signal Processing
 - Superior Signal-to-Noise Ratio
 - 3% Nominal Sensitivity
- Thermistor Heat Sensors
- Wiring Harness for Easy Pre-wire of Units
 - Cost Effective
 - Helps Prevent Construction Damage/Theft
- Visual Alarm and Power Indicator
- Built-in Test Switch
- Field Metering of Detector Sensitivity
- Easy Maintenance — Replaceable Insect Screen
- Built-in Tamper-resistant Feature
- 3-Year Warranty

SYSTEM SENSOR
A DIVISION OF PITTMAN

3825 Ohio Avenue • St. Charles, Illinois 60174 • 708-377-6363 • FAX: 708-377-6495
In Canada: 416-675-1695 • FAX: 416-675-7078



MEA
approved



General Specifications:

Height: 5.5 inches (13.9 cm)
 Weight: 0.7 lb (310 gm)
 Operating Temperature Range: 0° to +49°C (32° to 120°F)
 Operating Humidity Range: 10% to 90% Relative Humidity
 Latching Alarm: Reset by momentary power interruption.
 Test Feature: Insert 0.1 inch maximum diameter allen wrench or screwdriver into test hole on detector housing.
 Maximum Air Velocity: 3000 Ft./Min. (15 Meters/Sec.)
 Caution — Detectors subjected to continuous velocities above 300 fpm may require more frequent maintenance.
 Sensitivity: 3% (+/-3/-7)
 Spacing: Install per NFPA 72E, NFPA 74, and local requirements.
 Listings: UL S911; CSFM 7257-1209-142; MEA 427-91-E; FM Approved

Electrical Ratings:

System Voltage nominal: 12 or 24 VDC
 minimum: 8.5 VDC
 maximum: 35 VDC
 Maximum Ripple Voltage: 30% of nom. (peak to peak)
 Start-up Capacitance: 0.02 µF Maximum
 Standby Current: 120 µA Maximum
 Alarm Current: 10mA Minimum, 50mA Maximum



Reset Voltage: 0.8 VDC Minimum
 Reset Time: 6 Sec. Maximum
 Start-up Time: 34 Sec. Maximum
 (After 60 Sec. Reset)
 A77-716-01 (12 volt)
 A77-716-02 (24 volt)

Relay Contact Ratings (2312/24T only):

Resistive or inductive load (60% power factor):
 Form A: 2.0A @ 30 VAC/DC
 Form C: 0.6A @ 110 VDC, 2.0A @ 30 VAC/DC
 1.0A @ 125 VAC, 2.0A @ 30 VAC/DC
 *For Canadian installations, relay contact rating is 2.0A @ 30 VAC/DC

Ordering Information

Part No.	Description
2312/24T	Photoelectric, 4-Wire, 12 or 24 VDC, Thermistors, Molex Connector
2300T	Thermistors, Molex Connector
A77-716-01	Relay Module, 12 VDC (24 Pack)
A77-716-02	Relay Module, 24 VDC (24 Pack)
MOD400R	Test Module for 300 and 400 Series Detectors
RS23	Replacement Screen for 300 Series Smoke Detectors (12 Pack)
J2300	Shorting Plug for 300 Series Head Removal
T2300	Replacement Thermistors for 300 Series (2 Pack)
P87-206-00	Replacement 4-Wire Molex Connector for 2312/24T
P87-206-01	Replacement 2-Wire Molex Connector for 2300T
I56-490-XX	Installation Instructions for 2300T
I56-431-XX	Installation Instructions for 2312/24T

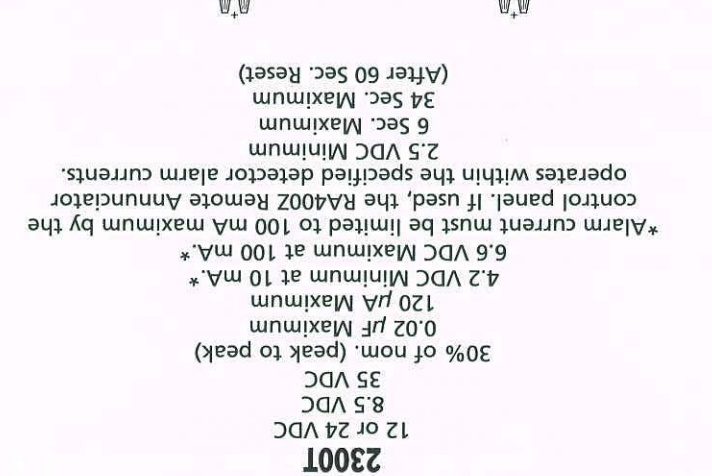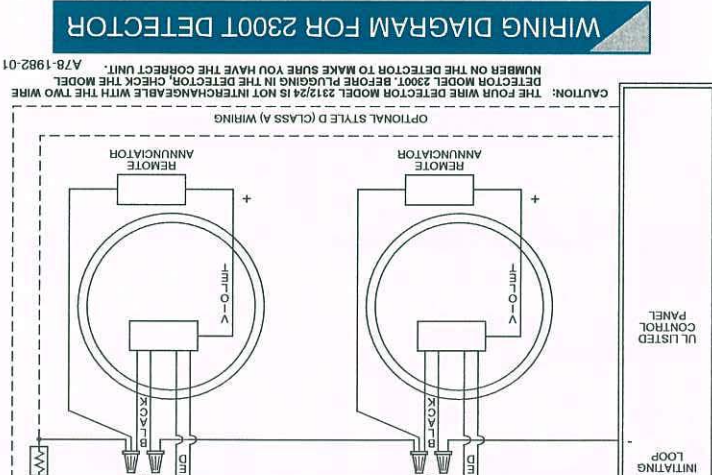

WIRING DIAGRAM FOR 2312/24T DETECTOR

Distributed by: