

SavantIC Semiconductor

Product Specification

Silicon NPN Power Transistors

2N5881 2N5882

DESCRIPTION


- With TO-3 package
- Low collector saturation voltage
- Complement to type 2N5879 2N5880

APPLICATIONS

- For general-purpose power amplifier and switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

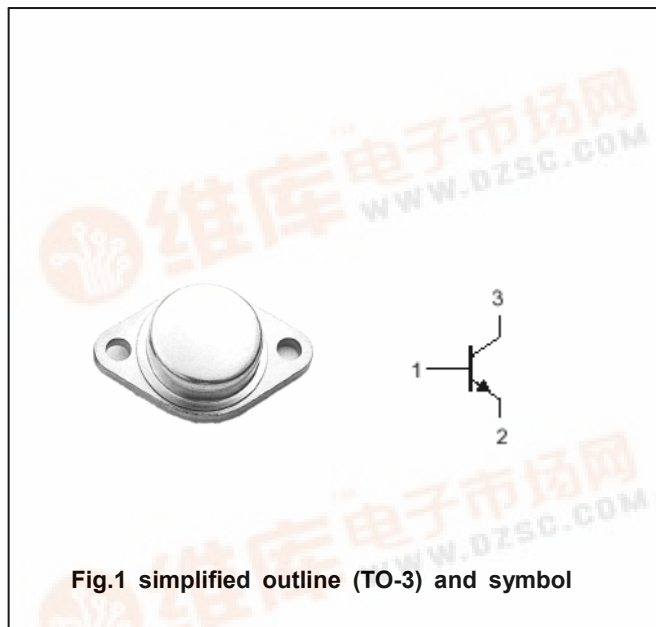

Absolute maximum ratings($T_a = \square$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N5881	60	V
		2N5882	80	
V_{CEO}	Collector-emitter voltage	2N5881	60	V
		2N5882	80	
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		15	A
I_{CM}	Collector current-peak		30	A
I_B	Base current		5	A
P_D	Total Power Dissipation	$T_C = 25\square$	160	W
T_j	Junction temperature		150	$\square$
T_{stg}	Storage temperature		-65~200	$\square$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.1	$\square/W$

Silicon NPN Power Transistors

2N5881 2N5882

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	2N5881	I _C =0.2A ; I _B =0	60			V
		2N5882		80			
V _{CEsat-1}	Collector-emitter saturation voltage		I _C =7A; I _B =0.7A			1.0	V
V _{CEsat-2}	Collector-emitter saturation voltage		I _C =15A; I _B =3.75A			4.0	V
V _{BEsat}	Base-emitter saturation voltage		I _C =15A; I _B =3.75A			2.5	V
V _{BE}	Base-emitter on voltage		I _C =6A ; V _{CE} =4V			1.5	V
I _{CBO}	Collector cut-off current		V _{CB} =ratedV _{CB} ; I _B =0			0.5	mA
I _{CEO}	Collector cut-off current	2N5881	V _{CE} =30V; I _B =0			1.0	mA
		2N5882	V _{CE} =40V; I _B =0				
I _{CEX}	Collector cut-off current		V _{CE} =ratedV _{CE} ; V _{BE} =1.5V T _C =150°C			0.5 5.0	mA
I _{EBO}	Emitter cut-off current		V _{EB} =5V; I _C =0			1.0	mA
h _{FE-1}	DC current gain		I _C =2A ; V _{CE} =4V	35			
h _{FE-2}	DC current gain		I _C =6A ; V _{CE} =4V	20		100	
h _{FE-3}	DC current gain		I _C =15A ; V _{CE} =4V	4			
f _T	Transistion frequency		I _C =1A ; V _{CE} =10V	4			MHz

Silicon NPN Power Transistors

2N5881 2N5882

PACKAGE OUTLINE

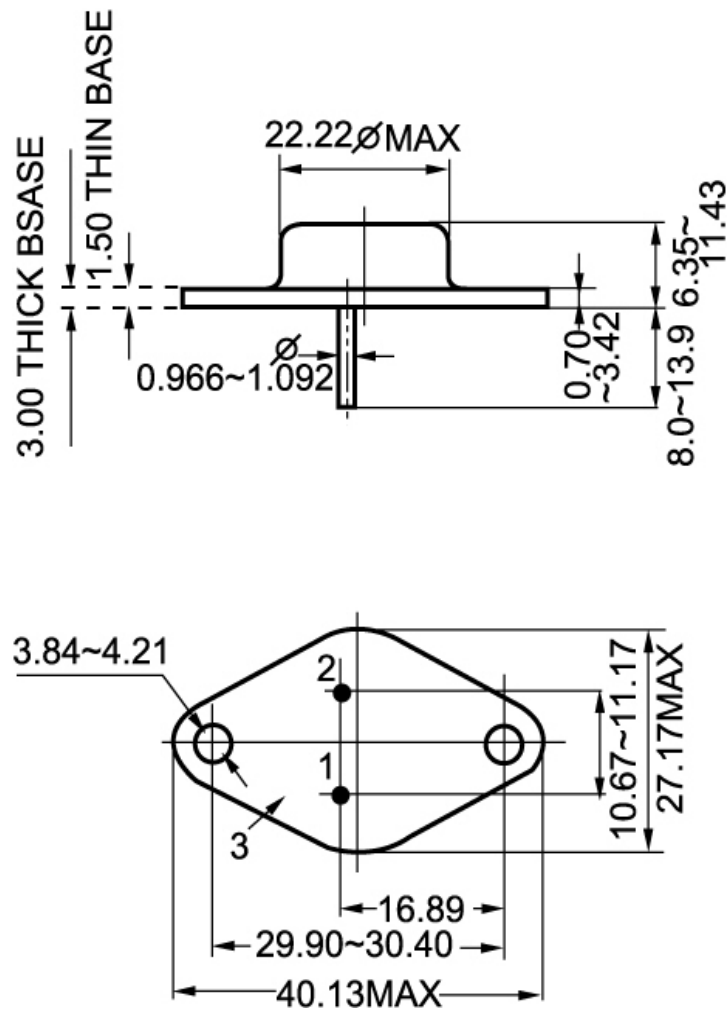


Fig.2 outline dimensions (unindicated tolerance:±0.10mm)