

SavantIC Semiconductor

Product Specification

Silicon NPN Power Transistors

2N6294 2N6295

DESCRIPTION

- With TO-66 package
- DARLINGTON
- Complement to type 2N6296/6297

APPLICATIONS

- For high gain amplifier and medium speed switching applications

PINNING (See Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

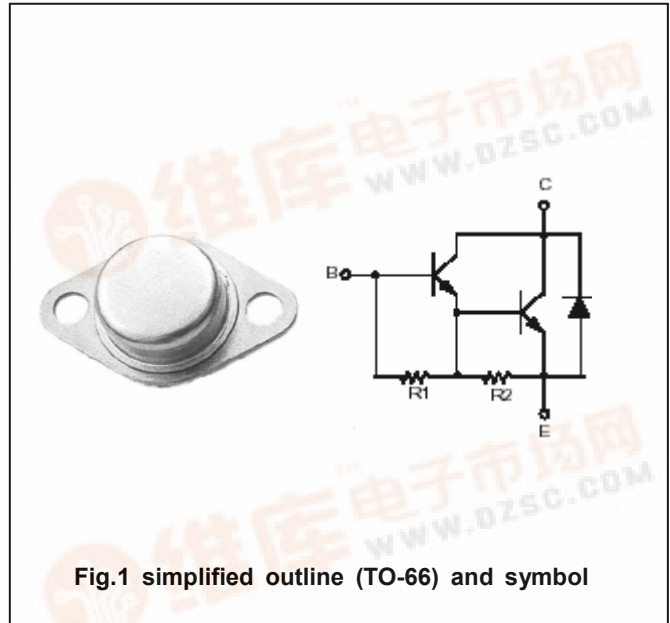


Fig.1 simplified outline (TO-66) and symbol

Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N6294	60	V
		2N6295	80	
V_{CEO}	Collector-emitter voltage	2N6294	60	V
		2N6295	80	
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		4	A
I_{CM}	Collector current-Peak		8	A
I_B	Base current		80	mA
P_T	Total power dissipation	$T_C=25^\circ\text{C}$	50	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance from junction to case	3.5	$^\circ\text{C}/\text{W}$

Silicon NPN Power Transistors

2N6294 2N6295

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	2N6294	I _C =50mA ; I _B =0	60			V
		2N6295		80			
V _{CEsat-1}	Collector-emitter saturation voltage		I _C =2A ; I _B =8mA			2.0	V
V _{CEsat-2}	Collector-emitter saturation voltage		I _C =4A ; I _B =40mA			3.0	V
V _{BEsat}	Base-emitter saturation voltage		I _C =4A ; I _B =40mA			4.0	V
V _{BE}	Base -emitter on voltage		I _C =2A ; V _{CE} =3V			2.8	V
I _{CEX}	Collector cut-off current		V _{CE} =Rated V _{CE} ; V _{BE(off)} =1.5V T _C =150°C			0.5 5.0	mA
I _{CEO}	Collector cut-off current		V _{CE} =1/2 Rated V _{CEO} ; I _B =0			0.5	mA
I _{EBO}	Emitter cut-off current		V _{EB} =5V; I _C =0			2.0	mA
h _{FE-1}	DC current gain		I _C =2A ; V _{CE} =3V	750		18000	
h _{FE-2}	DC current gain		I _C =4A ; V _{CE} =3V	100			
f _T	Transition frequency		I _C =1.5A ; V _{CE} =3V; f=1.0MHz	4.0			MHz
C _{OB}	Output capacitance		I _E =0 ; V _{CB} =10V; f=0.1MHz			120	pF

Silicon NPN Power Transistors

2N6294 2N6295

PACKAGE OUTLINE

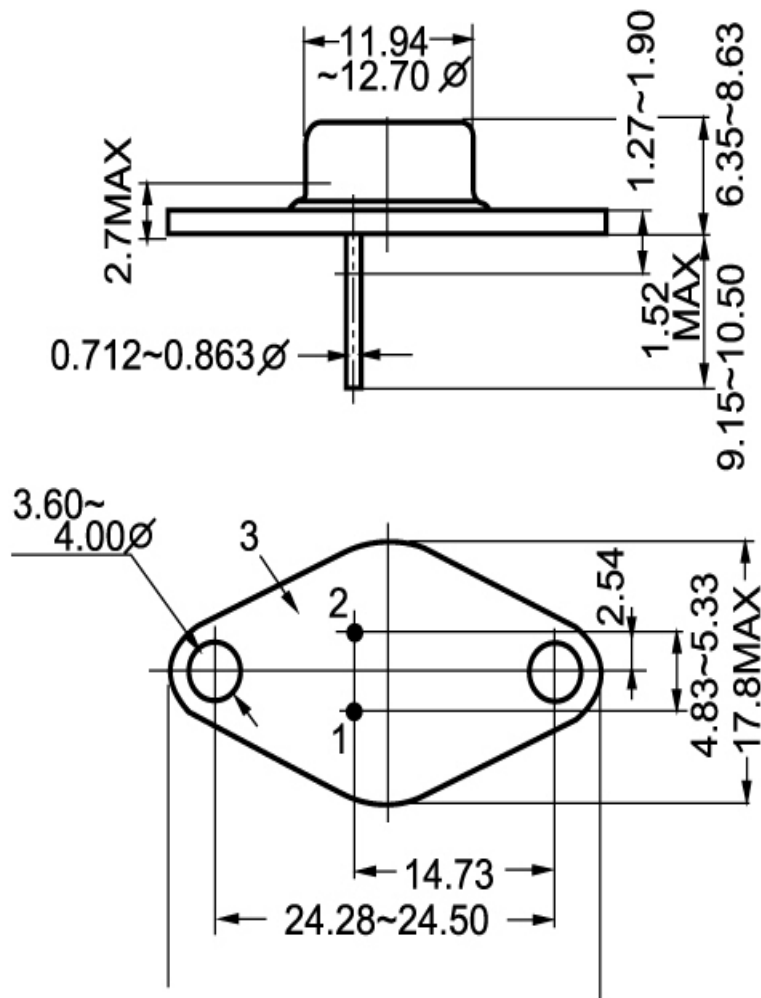


Fig.2 Outline dimensions

Silicon NPN Power Transistors

2N6294 2N6295

