



# SAW Components

Data Sheet B4143





SAW Components

B4143

Low-Loss Filter for Mobile Communication

1880,0 MHz


Data Sheet



Ceramic package DCC6C

**Features**

- Low-loss RF filter for mobile telephone PCS systems, transmit path
- Usable passband 60 MHz
- No matching network required for operation at 50 Ω
- Ceramic Package for **Surface Mounted Technology (SMT)**

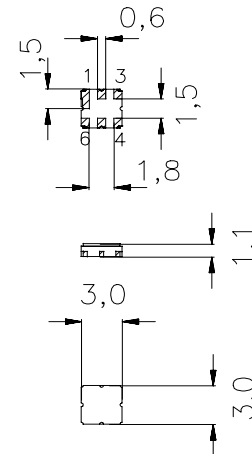


**Terminals**

- Ni, gold-plated

Dimensions in mm, approx. weight 0,037 g

**Pin configuration**

- 2 Input
- 3 Input - ground
- 5 Output
- 4 Output - ground
- 1,6 To be grounded



| Type  | Ordering code     | Marking and Package according to | Packing according to |
|-------|-------------------|----------------------------------|----------------------|
| B4143 | B39192-B4143-U410 | C61157-A7-A67                    | F61074-V8088-Z000    |

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

|                            |           |            |     |   |
|----------------------------|-----------|------------|-----|---|
| Operable temperature range | $T$       | - 30 /+ 85 | °C  | source and load impedance 50 Ω<br>peak power of TDMA signal,<br>duty cycle 1 : 3<br>continuous wave |
| Storage temperature range  | $T_{stg}$ | - 40 /+ 85 | °C  |   |
| DC voltage                 | $V_{DC}$  | 0          | V   |   |
| Input power max.           |           |            |     |   |
| 1850...1910 MHz            | $P_{IN}$  | 13         | dBm |   |
|                            |           | 10         | dBm |   |



**Characteristics**

Operating temperature range:  $T = 25 \pm 2 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$   
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$

|                                      |                 |                       | min. | typ.   | max. |     |
|--------------------------------------|-----------------|-----------------------|------|--------|------|-----|
| <b>Center frequency</b>              | $f_c$           |                       | —    | 1880,0 | —    | MHz |
| <b>Maximum insertion attenuation</b> | $\alpha_{\max}$ |                       | —    | 3,2    | 4,0  | dB  |
|                                      |                 | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Amplitude ripple (p-p)</b>        | $\Delta\alpha$  |                       | —    | 1,7    | 2,5  | dB  |
|                                      |                 | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Input VSWR</b>                    |                 |                       | —    | 2,0    | 2,2  |     |
|                                      |                 | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Output VSWR</b>                   |                 |                       | —    | 2,0    | 2,2  |     |
|                                      |                 | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Attenuation</b>                   | $\alpha$        |                       |      |        |      |     |
|                                      |                 | 10,0 ... 1570,0 MHz   | 23,0 | 26,0   | —    | dB  |
|                                      |                 | 1570,0 ... 1720,0 MHz | 33,0 | 35,0   | —    | dB  |
|                                      |                 | 1930,0 ... 1935,0 MHz | 15,0 | 24,0   | —    | dB  |
|                                      |                 | 1935,0 ... 1990,0 MHz | 20,0 | 27,0   | —    | dB  |
|                                      |                 | 2032,0 ... 2125,0 MHz | 35,0 | 36,5   | —    | dB  |
|                                      |                 | 2125,0 ... 2340,0 MHz | 35,0 | 37,0   | —    | dB  |
|                                      |                 | 2340,0 ... 3000,0 MHz | 30,0 | 39,0   | —    | dB  |
|                                      |                 | 3000,0 ... 3500,0 MHz | 15,0 | 24,0   | —    | dB  |



**Characteristics**

Operating temperature range:  $T = -10$  to  $+70$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 50 \Omega$

|                                      |                |                       | min. | typ.   | max. |     |
|--------------------------------------|----------------|-----------------------|------|--------|------|-----|
| <b>Center frequency</b>              | $f_c$          |                       | —    | 1880,0 | —    | MHz |
| <b>Maximum insertion attenuation</b> | $\alpha_{max}$ |                       | —    | 3,5    | 4,6  | dB  |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Amplitude ripple (p-p)</b>        | $\Delta\alpha$ |                       | —    | 2,0    | 3,1  | dB  |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Input VSWR</b>                    |                |                       | —    | 2,0    | 2,2  |     |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Output VSWR</b>                   |                |                       | —    | 2,0    | 2,2  |     |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Attenuation</b>                   | $\alpha$       |                       |      |        |      |     |
|                                      |                | 10,0 ... 1448,0 MHz   | 23,0 | 26,0   | —    | dB  |
|                                      |                | 1448,0 ... 1570,0 MHz | 30,0 | 32,0   | —    | dB  |
|                                      |                | 1570,0 ... 1720,0 MHz | 33,0 | 35,0   | —    | dB  |
|                                      |                | 1930,0 ... 1935,0 MHz | 14,5 | 22,0   | —    | dB  |
|                                      |                | 1935,0 ... 1990,0 MHz | 20,0 | 25,0   | —    | dB  |
|                                      |                | 2032,0 ... 2125,0 MHz | 35,0 | 36,5   | —    | dB  |
|                                      |                | 2125,0 ... 2340,0 MHz | 35,0 | 37,0   | —    | dB  |
|                                      |                | 2340,0 ... 3000,0 MHz | 30,0 | 39,0   | —    | dB  |
|                                      |                | 3000,0 ... 3500,0 MHz | 15,0 | 24,0   | —    | dB  |




**Characteristics**

Operating temperature range:  $T = -30$  to  $+85$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 50 \Omega$


|                                      |                |                       | min. | typ.   | max. |     |
|--------------------------------------|----------------|-----------------------|------|--------|------|-----|
| <b>Center frequency</b>              | $f_c$          |                       | —    | 1880,0 | —    | MHz |
| <b>Maximum insertion attenuation</b> | $\alpha_{max}$ |                       | —    | 3,5    | 5,0  | dB  |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Amplitude ripple (p-p)</b>        | $\Delta\alpha$ |                       | —    | 2,0    | 3,5  | dB  |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Input VSWR</b>                    |                |                       | —    | 2,0    | 2,2  |     |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Output VSWR</b>                   |                |                       | —    | 2,0    | 2,2  |     |
|                                      |                | 1850,0 ... 1910,0 MHz |      |        |      |     |
| <b>Attenuation</b>                   | $\alpha$       |                       |      |        |      |     |
|                                      |                | 10,0 ... 1570,0 MHz   | 23,0 | 26,0   | —    | dB  |
|                                      |                | 1570,0 ... 1720,0 MHz | 33,0 | 35,0   | —    | dB  |
|                                      |                | 1930,0 ... 1935,0 MHz | 13,0 | 22,0   | —    | dB  |
|                                      |                | 1935,0 ... 1990,0 MHz | 20,0 | 25,0   | —    | dB  |
|                                      |                | 2032,0 ... 2125,0 MHz | 35,0 | 36,5   | —    | dB  |
|                                      |                | 2125,0 ... 2340,0 MHz | 35,0 | 37,0   | —    | dB  |
|                                      |                | 2340,0 ... 3000,0 MHz | 30,0 | 39,0   | —    | dB  |
|                                      |                | 3000,0 ... 3500,0 MHz | 15,0 | 24,0   | —    | dB  |



Transfer function (25°C spec)


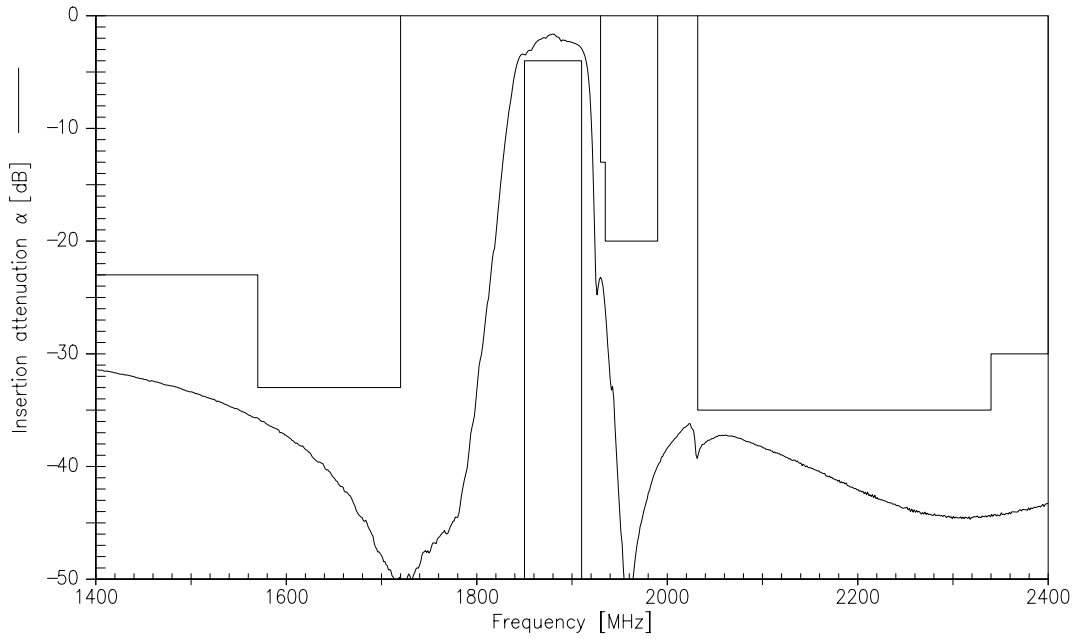


Transfer function (wideband)

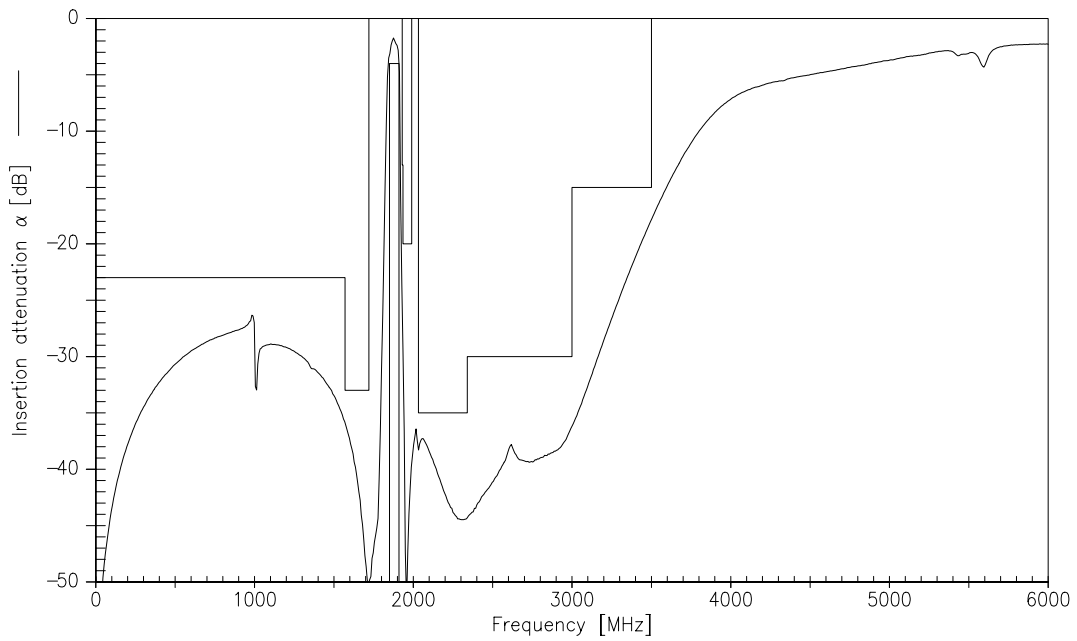



Reflection function

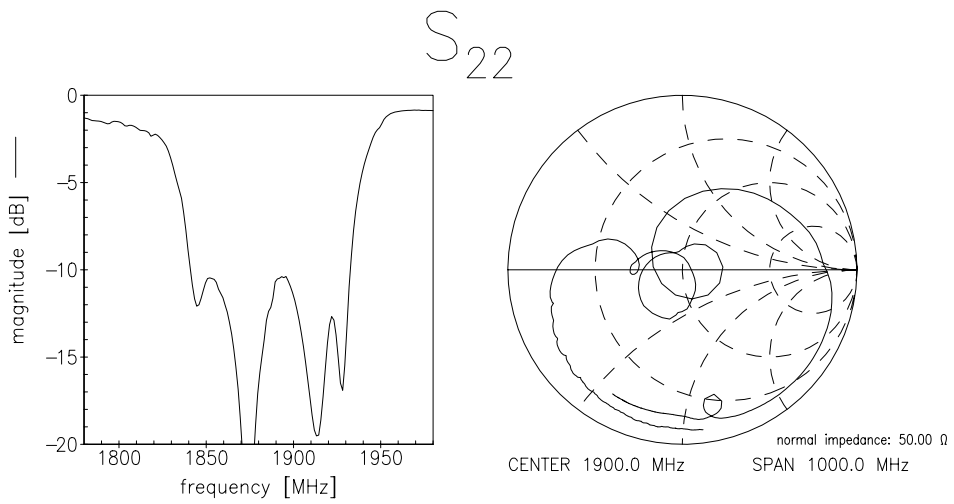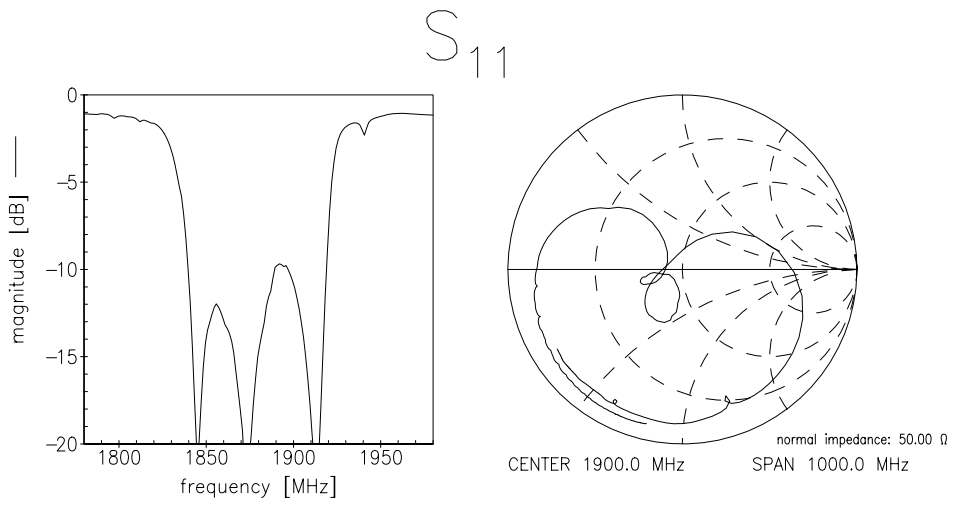



**SAW Components**

**B4143**

**Low-Loss Filter for Mobile Communication**

**1880,0 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, OFW E MF**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.