

DM74ALS30A 8-Input NAND Gate

General Description


This device contains a single gate, which performs the logic NAND function.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range

- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally and pin for pin compatible with Schottky and low power Schottky TTL counterpart
- Improved AC performance over Schottky and low power Schottky counterparts

Connection Diagram

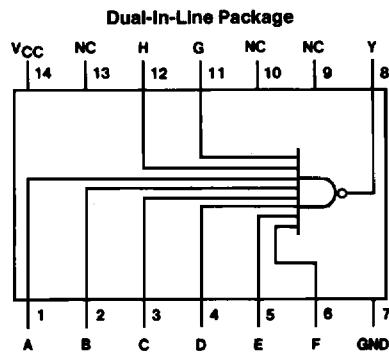

TL/F/6189-1

Order Number DM74ALS30AM, DM74ALS30AN or DM74ALS30ASJ
See NS Package Number M14A, M14D or N14A

Function Table

$$Y = \overline{ABCDEFGH}$$

| Inputs A thru H | Output Y |
|--|-------------|
| All Inputs H One or More Input L | L H |

H = High Logic Level
L = Low Logic Level

Absolute Maximum Ratings

| | |
|---|-----------------|
| Supply Voltage | 7V |
| Input Voltage | 7V |
| Operating Free Air Temperature Range DM74ALS | 0°C to +70°C |
| Storage Temperature Range | -65°C to +150°C |
| Typical θ_{JA} | |
| N Package | 86.5°C/W |
| M Package | 116.0°C/W |

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

| Symbol | Parameter | DM74ALS30A | | | Units |
|-----------------|--------------------------------|------------|-----|------|-------|
| | | Min | Nom | Max | |
| V _{CC} | Supply Voltage | 4.5 | 5 | 5.5 | V |
| V _{IH} | High Level Input Voltage | 2 | | | V |
| V _{IL} | Low Level Input Voltage | | | 0.8 | V |
| I _{OH} | High Level Output Current | | | -0.4 | mA |
| I _{OL} | Low Level Output Current | | | 8 | mA |
| T _A | Free Air Operating Temperature | 0 | | 70 | °C |

Electrical Characteristics

over recommended operating free air temperature range. All typical values are measured at V_{CC} = 5V, T_A = 25°C.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------|------------------------------------|---|---------------------|------|------|-------|
| V _{IK} | Input Clamp Voltage | V _{CC} = 4.5V, I _I = -18 mA | | | -1.5 | V |
| V _{OH} | High Level Output Voltage | I _{OH} = -0.4 mA V _{CC} = 4.5V to 5.5V | V _{CC} - 2 | | | V |
| V _{OL} | Low Level Output Voltage | V _{CC} = 4.5V 74ALS I _{OL} = 8 mA | | 0.35 | 0.5 | V |
| I _I | Input Current at Max Input Voltage | V _{CC} = 5.5V, V _{IH} = 7V | | | 0.1 | mA |
| I _{IH} | High Level Input Current | V _{CC} = 5.5V, V _{IH} = 2.7V | | | 20 | μA |
| I _{IL} | Low Level Input Current | V _{CC} = 5.5V, V _{IL} = 0.4V | | | -0.1 | mA |
| I _O | Output Drive Current | V _{CC} = 5.5V V _O = 2.25V | -30 | | -112 | mA |
| I _{CC} | Supply Current | V _{CC} = 5.5V | | | | |
| | | Outputs High | | 0.22 | 0.36 | mA |
| | | Outputs Low | | 0.54 | 0.90 | mA |

Switching Characteristics

over recommended operating free air temperature range (Note 1)

| Symbol | Parameter | Conditions | DM74ALS30A | | Units |
|------------------|--|---|------------|-----|-------|
| | | | Min | Max | |
| t _{PLH} | Propagation Delay Time Low to High Level Output | V _{CC} = 4.5V to 5.5V R _L = 500Ω C _L = 50 pF | 3 | 10 | ns |
| t _{PHL} | Propagation Delay Time High to Low Level Output | | 3 | 12 | ns |

Note 1: See Section 5 for test waveforms and output load.