



DM74ALS86 Quad 2-Input Exclusive-OR Gate

General Description


This device contains four independent gates, each of which performs the logic exclusive-OR function.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range

- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally and pin for pin compatible with Schottky and low power Schottky TTL counterpart
- Improved AC performance over Schottky and low power Schottky counterparts

Connection Diagram

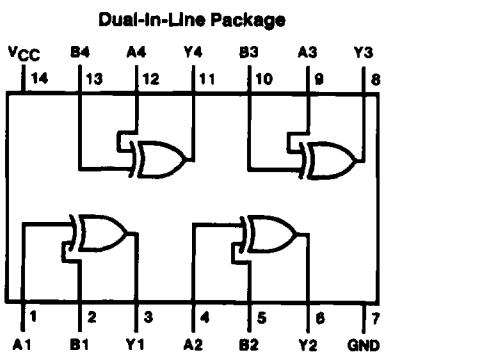

TL/F/6195-1

Order Number DM74ALS86M or DM74ALS86N
See NS Package Number M14A or N14A

Function Table

$$Y = A \oplus B = \overline{A}B + A\overline{B}$$

Inputs		Output
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	L

H = High Logic Level

L = Low Logic Level

Absolute Maximum Ratings

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range DM74ALS	0°C to +70°C
Storage Temperature Range	-65°C to +150°C
Typical θ_{JA}	
N Package	87.0°C/W
M Package	117.2°C/W

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	DM74ALS86			Units
		Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	V
V _{IH}	High Level Input Voltage	2			V
V _{IL}	Low Level Input Voltage			0.8	V
I _{OH}	High Level Output Current			-0.4	mA
I _{OL}	Low Level Output Current			8	mA
T _A	Free Air Operating Temperature	0		70	°C

Electrical Characteristics

over recommended operating free air temperature range. All typical values are measured at V_{CC} = 5V, T_A = 25°C.

Symbol	Parameter	Conditions		Min	Typ	Max	Units
V _{IK}	Input Clamp Voltage	V _{CC} = 4.5V, I _I = -18 mA				-1.5	V
V _{OH}	High Level Output Voltage	I _{OH} = -0.4 mA V _{CC} = 4.5V to 5.5V		V _{CC} - 2			V
V _{OL}	Low Level Output Voltage	V _{CC} = 4.5V	I _{OL} = 4 mA		0.25	0.4	V
			I _{OL} = 8 mA		0.35	0.5	V
I _I	Input Current @ Max. Input Voltage	V _{CC} = 5.5V, V _{IH} = 7V				0.1	mA
I _{IH}	High Level Input Current	V _{CC} = 5.5V, V _{IH} = 2.7V				20	μA
I _{IL}	Low Level Input Current	V _{CC} = 5.5V, V _{IL} = 0.4V				-0.1	mA
I _O	Output Drive Current	V _{CC} = 5.5V	V _O = 2.25V	-30		-112	mA
I _{CCL}	Supply Current with Outputs Low	V _{CC} = Max, All Inputs at 4.5V			3.9	5.9	mA
I _{CCH}	Supply Current with Outputs High	V _{CC} = Max, A Inputs at 0.0V B Inputs at 4.5V			3.8	4.5	mA

Switching Characteristics

over recommended operating free air temperature range (Note 1).

Symbol	Parameter	Conditions		DM74ALS86		Units
				Min	Max	
t _{PLH}	Propagation Delay Time Low to High Level Output	(Note 2)	A or B to Y Other Input Low	3	17	ns
t _{PHL}	Propagation Delay Time High to Low Level Output			2	12	ns
t _{PLH}	Propagation Delay Time Low to High Level Output		A or B to Y Other Input High	2	17	ns
t _{PHL}	Propagation Delay Time High to Low Level Output			2	10	ns

Note 1: See Section 5 for test waveforms and output load.

Note 2: V_{CC} = 4.5V to 5.5V, R_L = 500Ω, C_L = 50 pF.