




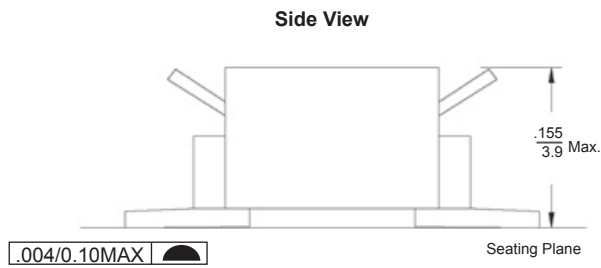


## Outline Dimensions (Inch/mm)


**Figure 1**




**Figure 2**

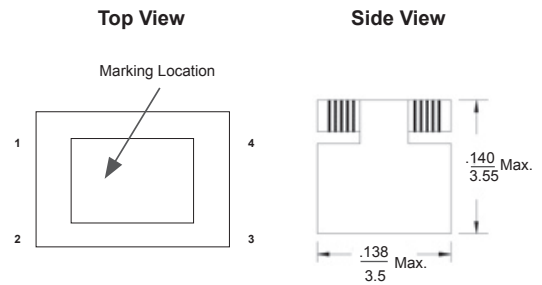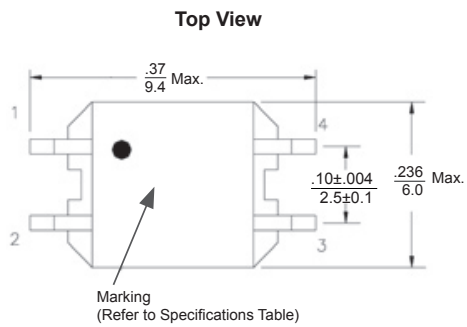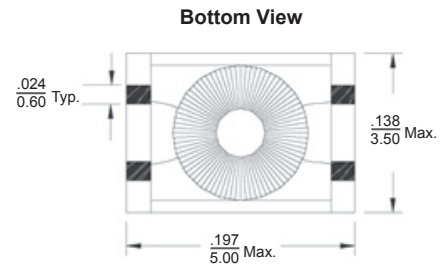

**Recommended Solder Pad Layout**

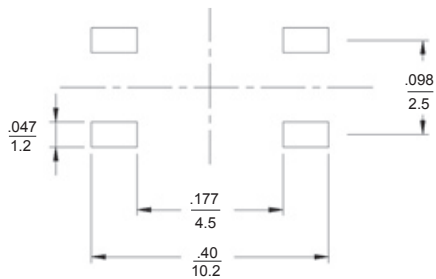


**Recommended Solder Pad Layout**

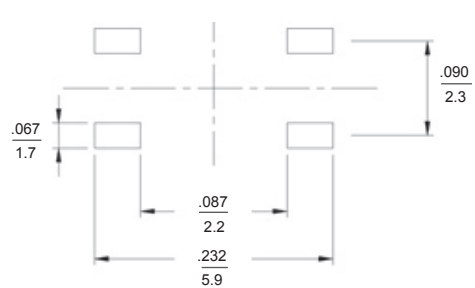


## Electrical Characteristics @ 25 °C

### (A) Attenuation vs. Frequency Graphs


HM67-B5R0

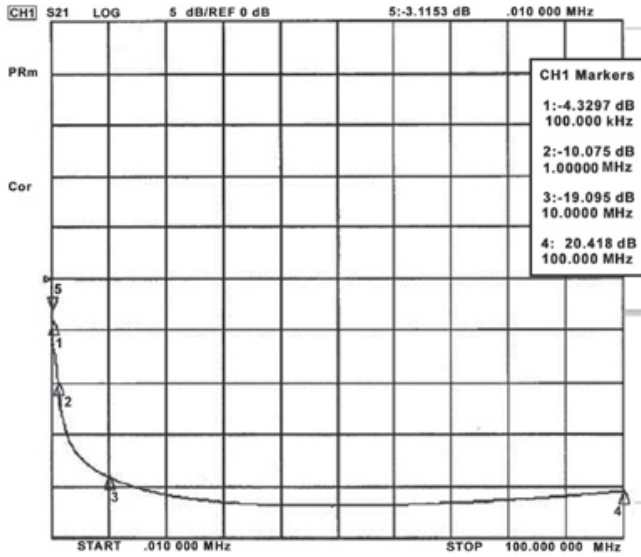


HM67-S250

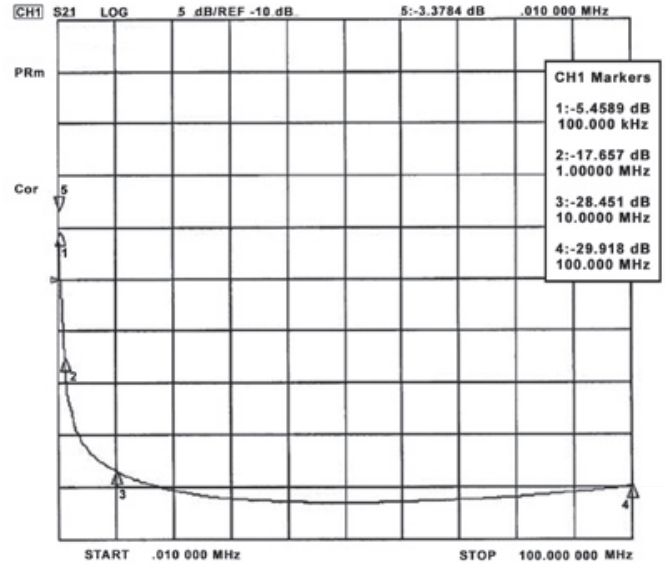

HM67-B110

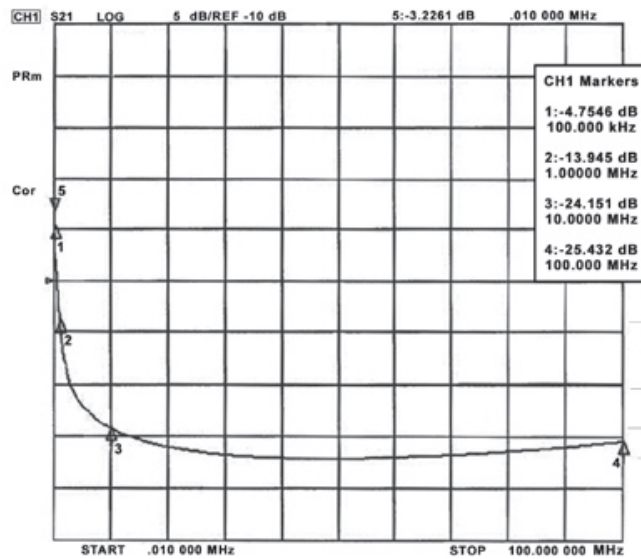


HM67-B510

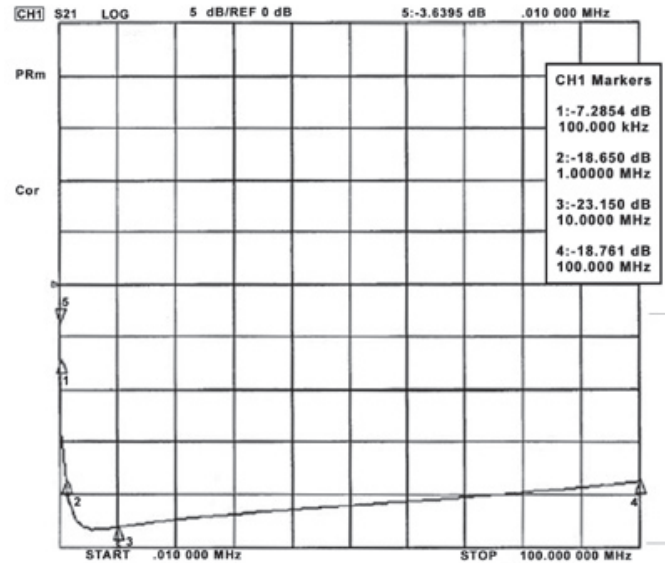


## Electrical Characteristics @ 25 °C (Cont'd)


### HM67-S510

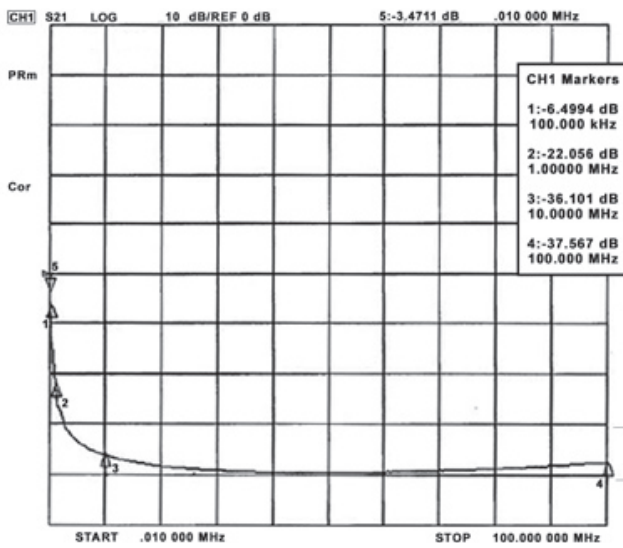


### HM67-B102

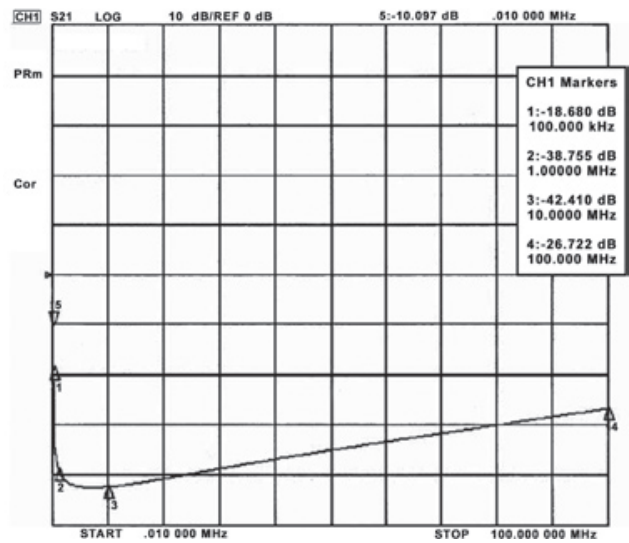


### HM67-B471

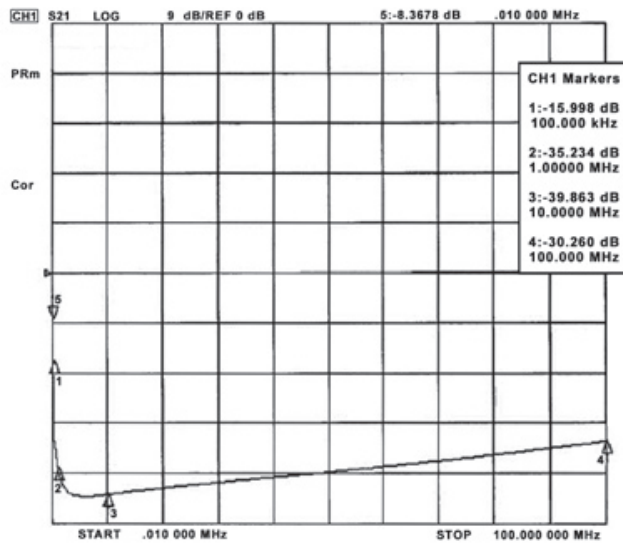

### HM67-B222

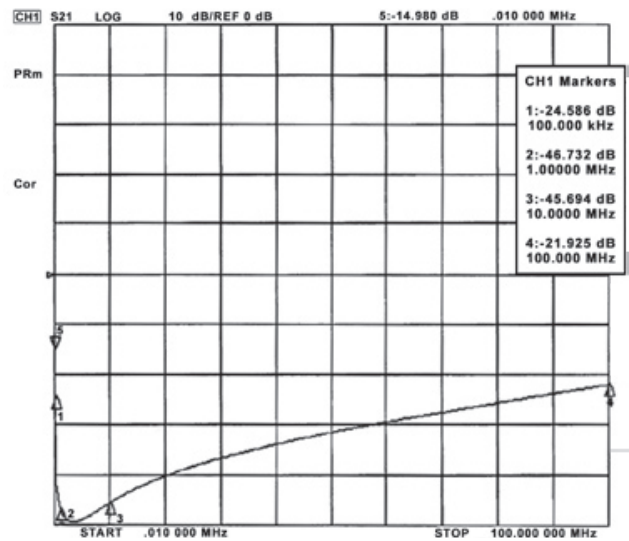


### HM67-B472

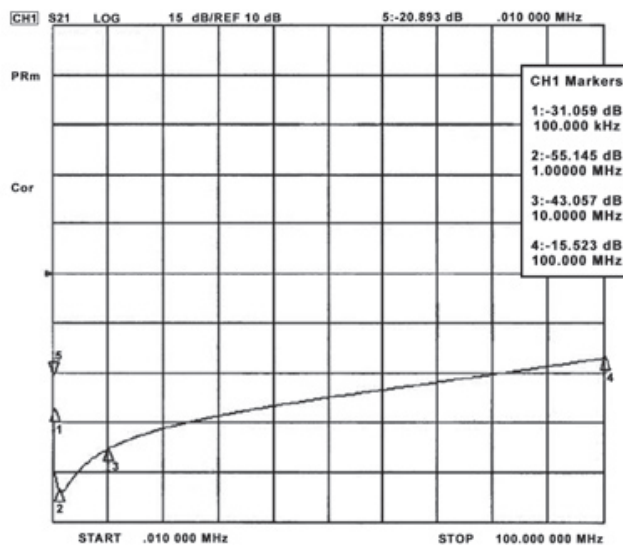

**Electrical Characteristics @ 25 °C (Cont'd)**

**(B) Insertion Loss vs. Frequency Graph**

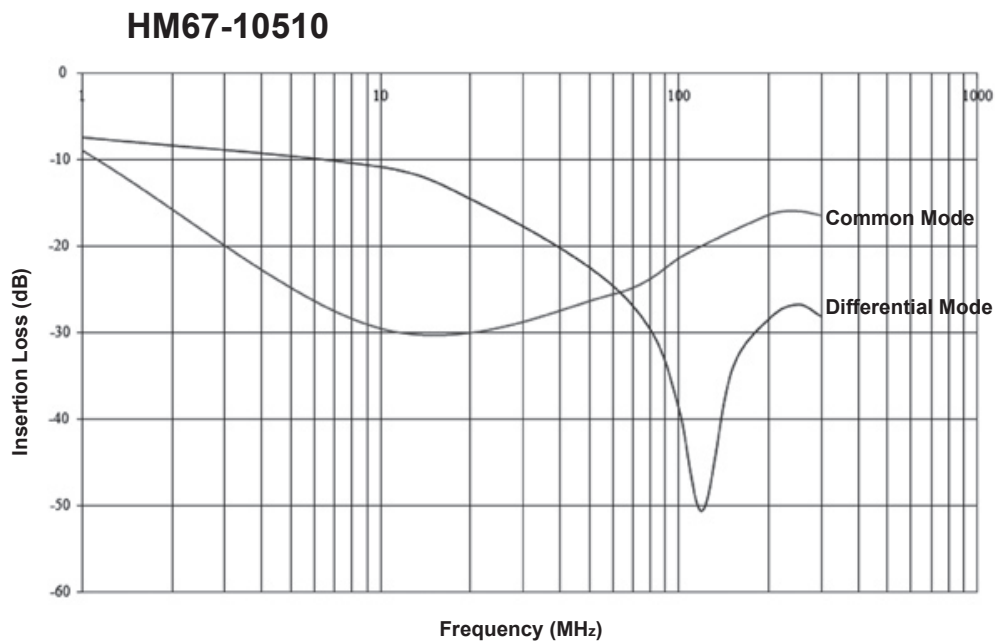

**(C) Current Derating Curve**

