



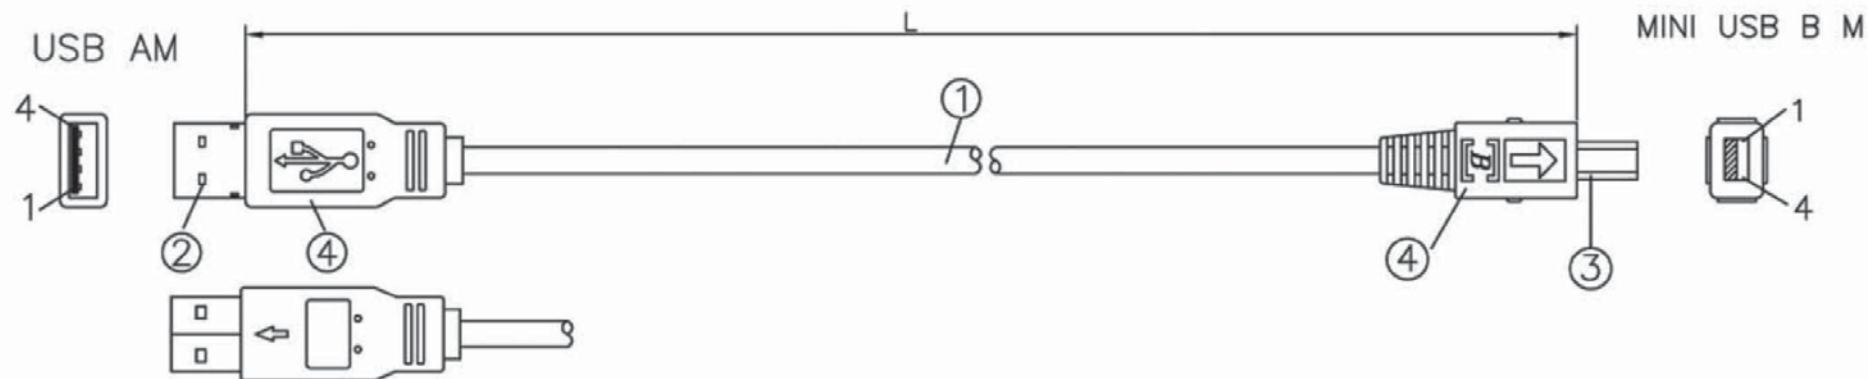

CONFIGURATION:

USB A M

MINI USB 4PIN B M

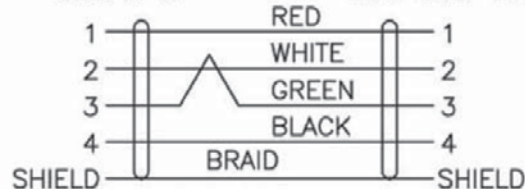

ITEM NO	L
AK670M-1	1000±30MM
AK670M-2	2000±50MM
AK670M-3	3000±50MM
AK670M-5	5000±50MM

ELECTRECAL TEST:

- 1.100% SHORT, OPEN, MISWIRE TEST
- 2.CONDUCT RESISTANCE: X Ohm (MAX.)
($0 < L < 3M$:X=2; $3M \leq L < 10M$:X=5; $10M \leq L$:X=10)
- 3.INSULATION RESISTANCE: 10M Ohm (MIN.)
- 4.DIELECTRIC TEST: AC 300V

④	OUTER MOLD:45P PVC COLOR:BLACK(CS-001)
③	CONNECTOR:MINI USB 4P B PLUG SOLDER TYPE 3U"
②	CONNECTOR:USB A MALE SOLDER TYPE 3U" INSULATION:WHITE
①	CABLE:UL20276,28AWG*1P+28AWG*2C+AL/MY+SPIRAL,O.D:3.8MM PVC JACKET COLOR:BLACK(CS-001)
NO.	DESCRIPTION

Scale	1:1							Name
TOLERANCE						Drawn	08.29.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								
			Modification	Date	Name			

RoHS
Complaint

Item No.	AK670M-X (Version 1.1)
	AK670M/2-X (Version 2.0)

Title	USB 1.1 & 2.0, USB A Male to USB B Mini (4 pin)
--------------	---

Drawing No.

rev00

Replace

Sheet
