## NOTES:

I. MATERIALS OF CONSTRUCTION:

SHELL, HOUSING & COVER = BRASS, GOLD PLATED (.000003 MIN THICK)

CONTACT PIN = BRASS, GOLD PLATED (.000050 MIN THICK)

RETAINER RING = BeCu, NATURAL


FERRULE = COPPER, GOLD PLATED (.000003 MIN THICK)

INSULATOR = TEFLON, MIL-P-19468


GASKET = SILICONE RUBBER, COLOR RED

HEAT SHRINK TUBING = COLOR BLACK

2. CRIMPED FERRULE = HEX CRIMP SIZE .151 CONTACT PINT TO SOLDER.

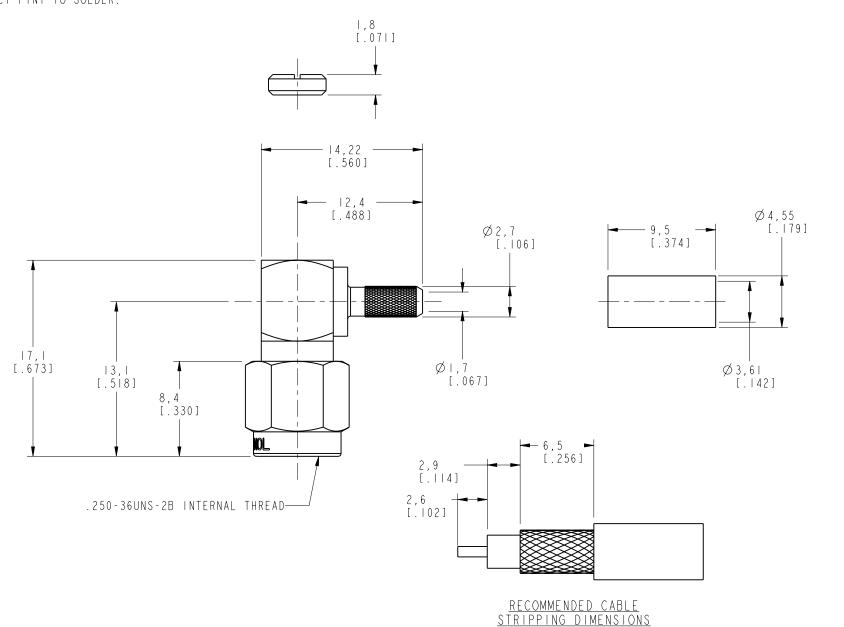



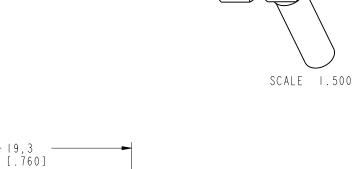

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ±0.2mm ±0.4mm ± 0.6mm	DRAWN C. McGRATH	DATE 8/20/01	SMA R/A	Amphenol Corporation
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they REFERENCE	ENGINEER O. BARTHELMES	DATE 8/20/01	CRIMP PLUG (FOR RG-316U/D CABLE)	Communication and Network
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	APPROVED O. BARTHELMES	DATE 9/14/01	TOK KG-SIDU/D CADLE)	Danbury, CT U.S.A. 06810  SCALE: 3.0:1 SHEET 2 OF 2
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.  GEN# 901-9881-RFX_ASSY	CAD FILE 1:\SMA\901-10028-RFX		CODE ID DWG SIZE DRAWING N	0.1-10028-RFX B

SCALE 3.000