


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

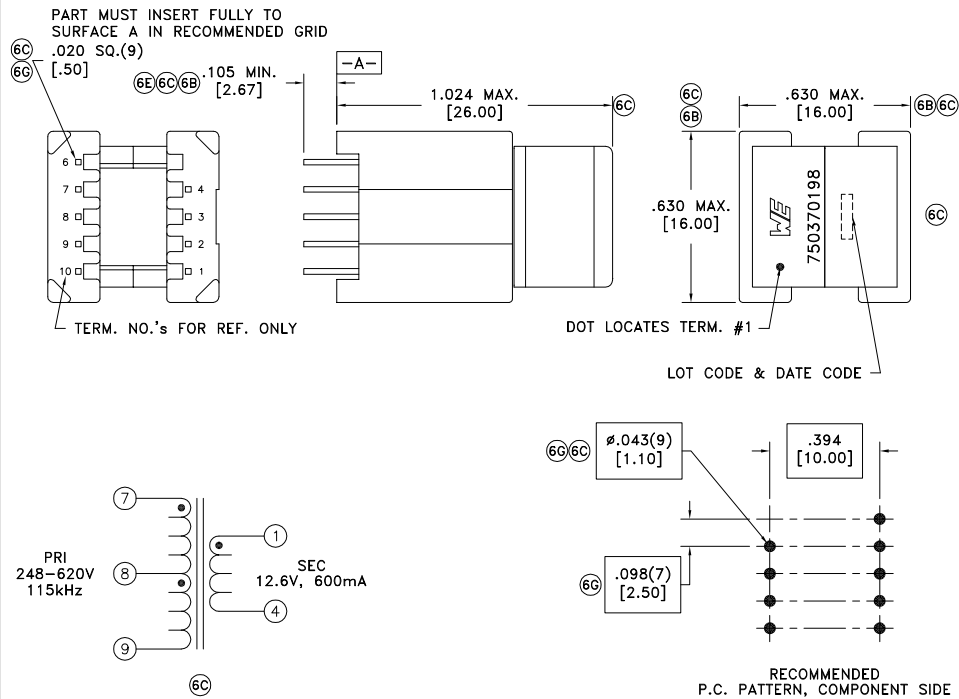

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	7-9 @20°C	4.75 ohms ±10%
D.C. RESISTANCE	1-4 @20°C	0.125 ohms ±10%
INDUCTANCE	7-9 10kHz, 100mVAC, Ls	2.07mH ±5%
SATURATION CURRENT	20% rolloff from initial	450mA
LEAKAGE INDUCTANCE	7-9 tie(2+4), 100kHz, 100mVAC, Ls	18uH typ., 30uH max.
DIELECTRIC	9-1 1000VAC, 1 second	800VAC, 1 minute
DIELECTRIC	9-Core 1000VAC, 1 second	800VAC, 1 minute
URNS RATIO	(7-9):(1-4)	4.69:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
6H	11/15	Method: Tray	
6G	11/15	PKG-1022	
6F	9/15	www.we-online.com/midcom	
6E	8/15	SEE REVISION SHEET FOR	REVISION LEVEL

Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64	Decimals: ±.005 Footprint: ±.001
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	

DRAWING TITLE
TRANSFORMER
eiSos p/n: 750370198

PART NO.
750370198
SPECIFICATION SHEET 1 OF 1