
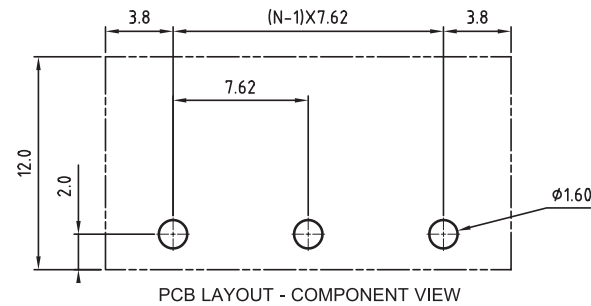

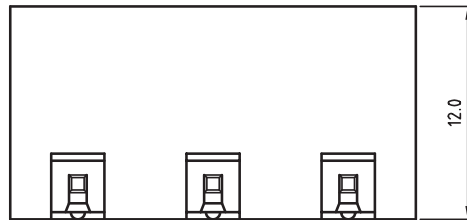


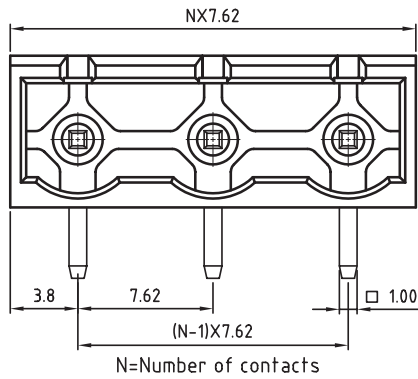

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
CONTACT: BRASS
SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 20A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 1.6KV
CONTACT RESISTANCE: 20 mOhm max

STANDARD
ULUS CERTIFIED E315414

MECHANICAL
PITCH: 7.62MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK		DESCRIPTION: SERIE 3134 - 7.62MM CLOSED HORIZONTAL PCB HEADER WR-TBL WERI PART NO: 691 313 410 0xx	SIZE A4
G									
F									
E									
D									
C	14-OCT-09	STANDARD	JP	APPROVAL: RJ	UNIT: MM	DESCRIPTION: SERIE 3134 - 7.62MM CLOSED HORIZONTAL PCB HEADER WR-TBL WERI PART NO: 691 313 410 0xx		SIZE A4	
B	23-JUN-09	DESCRIP.: CLOSED	JP		SCALE:				
A	05-NOV-08	PDF	JP		SHEET: 1/1				
REV	DATE	FILE	BY		DRAW: MARVIN				