
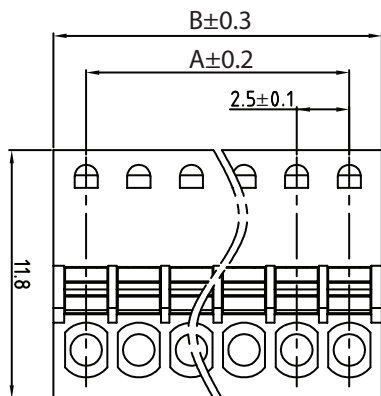
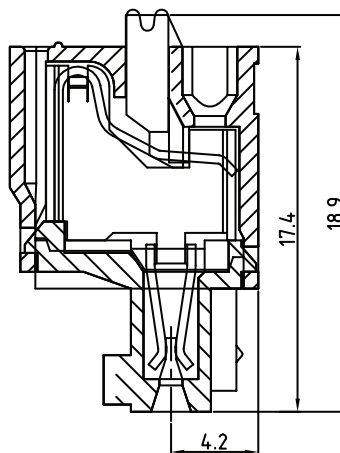


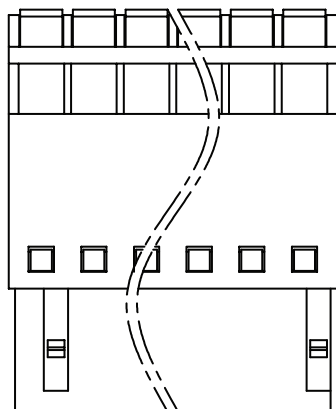

A	(N-1)X2.5
B	NX2.5+0.6

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN PLATED


ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 12A
WORKING VOLTAGE: 300V AC
WITHSTANDING VOLTAGE: 2500 VAC/min
CONTACT RESISTANCE: 20 mΩ max

STANDARD
RoHS CERTIFIED E315414

MECHANICAL
SOLID WIRE: 24-16 AWG
STRANDED WIRE: 24-16 AWG
WIRE STRIP LENGTH: 6-8 mm
PITCH: 2,5 mm

PACKAGING
BOX

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
G								
F								
E								
D								
C				APPROVAL: FBr	UNIT: MM	DESCRIPTION: SERIE 381 - VERTICAL CABLE ENTRY PLUG SCREWLESS - PITCH 2,5 MM - WR-TBL	SIZE A4	
B	12-AUG-15	REMOVE SOLDER	AK		SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 1/3			WERI PART NO: 691 381 000 0XX
REV	DATE	FILE	BY		DRAW: AS			

