



APPLICABLE STANDARD		MIL-STD-348B			
RATING	OPERATING TEMPERATURE RANGE	- 55° C TO + 105° C (95%RH MAX)		STORAGE TEMPERATURE RANGE	- 55° C TO + 50° C (95%RH MAX)
	POWER	—W		CHARACTERISTIC IMPEDANCE	50 Ω (0 TO 40 GHz)
	PECULIARITY	—		APPLICABLE CABLE	—
SPECIFICATIONS					
ITEM		TEST METHOD		REQUIREMENTS	QT AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X X
MARKING		CONFIRMED VISUALLY.			— —
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	100 mA MAX (DC OR 1000 Hz).	CENTER CONTACT	4 mΩ MAX.	X	X
		OUTER CONTACT	2 mΩ MAX.	X	X
INSULATION RESISTANCE	500 V DC.		1000 MΩ MIN.	X	X
VOLTAGE PROOF	500 V AC FOR 1 min. CURRENT LEAKAGE 2mA MAX.	NO FLASHOVER OR BREAKDOWN.			X X
VOLTAGE STANDING WAVE RATIO	FREQUENCY 0.04 TO 40 GHz ① TEST METHOD IS Back to Back	VSWR 1.10 MAX. (0.04 to 18 GHz)		X	—
		VSWR 1.15 MAX. (18 to 26.5 GHz)			
		VSWR 1.30 MAX. (26.5 to 40 GHz)			
INSERTION LOSS	FREQUENCY — TO — GHz		— dB MAX.	—	—
MECHANICAL CHARACTERISTICS					
CONTACT INSERTION AND EXTRACTION FORCES	0 Φ0.9195 -0.0025 BY STEEL GAUGE.	INSERTION FORCE	— N MAX.	—	—
		EXTRACTION FORCE	0.4 N MIN.	X	X
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE	— N MAX.	—	—
		EXTRACTION FORCE	— N MIN.	—	—
MECHANICAL OPERATION	500 TIMES INSERTIONS AND EXTRACTIONS.	1) CONTACT RESISTANCE: CENTER CONTACT 6 mΩ MAX. CHANGE OUTER CONTACT 4 mΩ MAX. CHANGE 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			X —
VIBRATION	FREQUENCY 10 TO 2000 Hz SINGLE AMPLITUDE 0.75 mm, 196 m/s ² AT 12 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			X —
SHOCK	1960 m/s ² DIRECTIONS OF PULSE 6 ms AT 3 TIMES FOR 3 DIRECTIONS.				X —
CABLE CLAMP ROBUSTNESS (AGAINST CABLE PULL)	APPLYING A PULL FORCE THE CABLE AXIALLY AT —N MAX.	1) NO WITHDRAWAL AND BREAKAGE OF CABLE. 2) NO BREAKAGE OF CLAMP.			— —
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT	EXPOSED AT -10 TO +65°C, 90 TO 98 % TOTAL 10 CYCLES (240h)	1) INSULATION RESISTANCE: 100 MΩ MIN. (AT HIGH HUMIDITY) 2) INSULATION RESISTANCE: 1000 MΩ MIN. (AT DRY) 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			X —
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → — → +105 → — °C TIME 30 → 3 → 30 → 3 min UNDER 5 CYCLES.	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			X —
CORROSION SALT MIST	EXPOSED IN 5% SALT WATER SPRAY FOR 48h.	NO HEAVY CORROSION.			X —
COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
△					
REMARK			APPROVED	KY. SHIMIZU	15. 10. 22
RoHS COMPLIANT			CHECKED	TO. KATAYAMA	15. 10. 22
Note ① Measurement state of Back to Back.			DESIGNED	NK. OOSAWA	15. 10. 22
Port1  Port2			DRAWN	NK. OOSAWA	15. 10. 22
Unless otherwise specified, refer to MIL-STD-202.					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-366760-11-00
HRS	SPECIFICATION SHEET		PART NO.	HK-R-SR2-1 (11)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL338-0003-0-11	△ 1/1

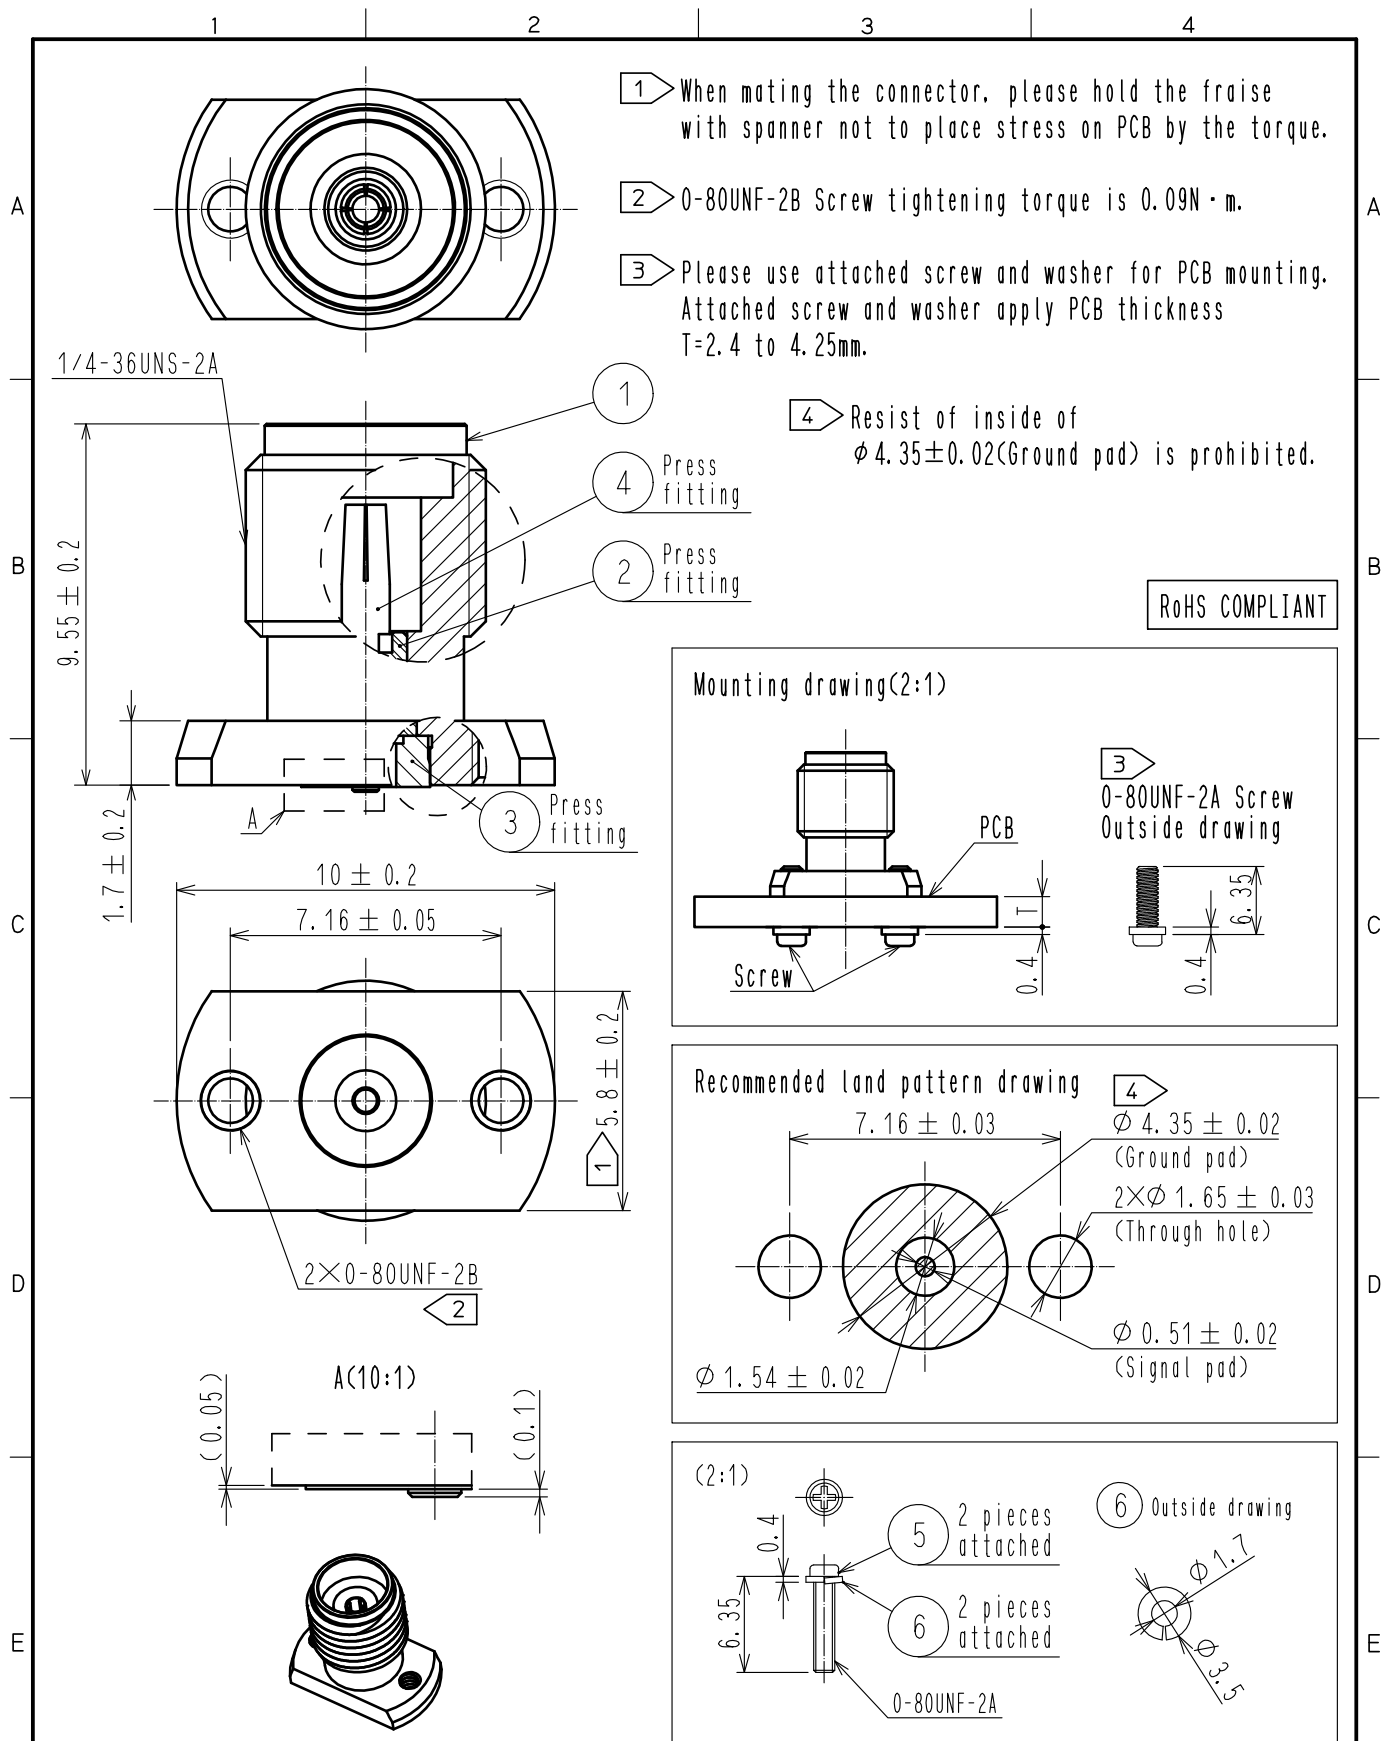

3	STAINLESS STEEL	GOLD PLATING	6	STAINLESS STEEL	Spring washer
2	PTFE		5	STEEL	0-80UNF-2A Screw
1	STAINLESS STEEL	PASSIVATE	4	BERYLLIUM COPPER	GOLD PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
					CHECKED
					DATE
APPROVED : KY. SHIMIZU 15.10.22			DRAWING NO. EDC-366760-11-00		
CHECKED : TO. KATAYAMA 15.10.22			PART NO. HK-R-SR2-1(11)		
DESIGNED : NK. OOSAWA 15.10.22			CODE NO. CL338-0003-0-11		
DRAWN : NK. OOSAWA 15.10.22					