

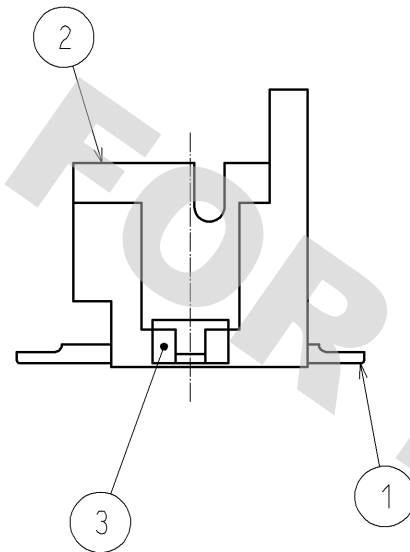
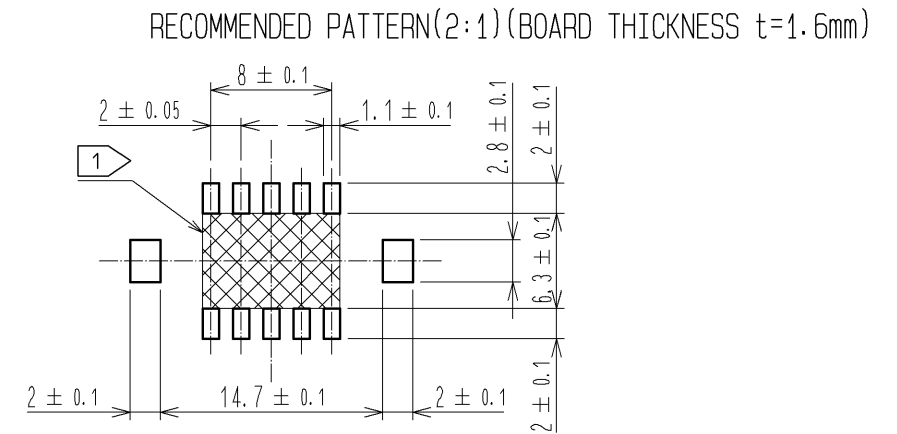
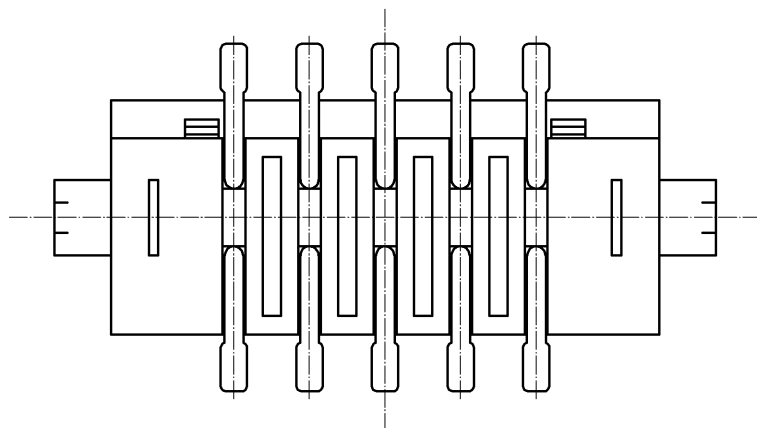
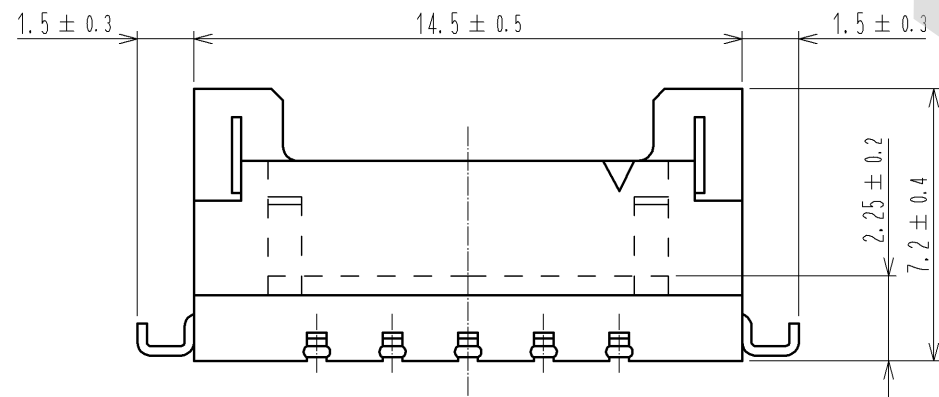


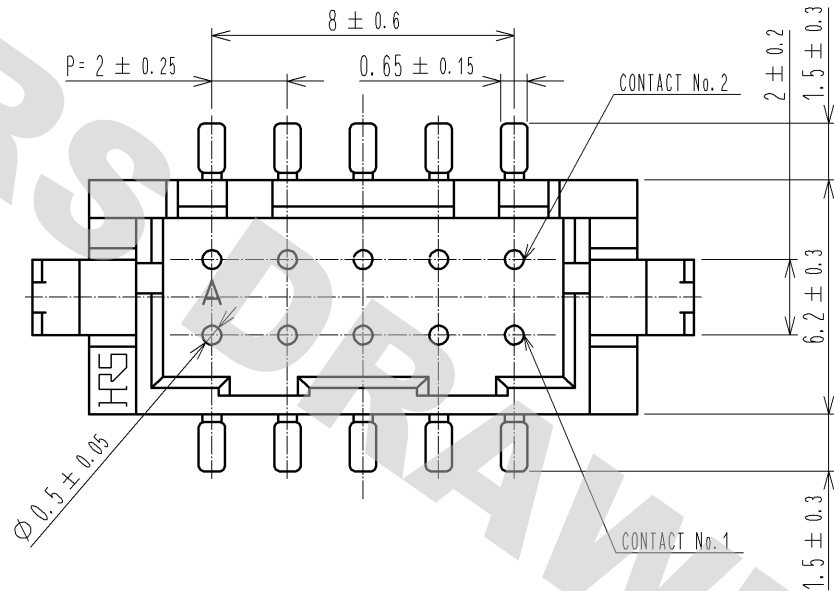


DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012



- NOTES 1 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.
2. LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.

2	POLYAMIDE	BEIGE, UL94V-0	6	POLYESTER	CLEAR(COVER TAPE)
1	BRASS	SURFACE:GOLD PLATED $0.2\mu\text{m min}$ UNDER PLATING:NICKEL PLATED $1\mu\text{m min}$	5	PS	CLEAR(EMBOSSED CARRIER TAPE)
			4	POLYAMIDE	CAP. BLACK
			3	BRASS	TIN PLATED $1\mu\text{m min}$
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA	08.10.30	DRAWING NO.	EDC3-161192-01
		CHECKED : TS. KUMAZAWA	08.10.29	PART NO.	DF11C-10DP-2V(57)
		DESIGNED : KT. ISHII	08.10.29	CODE NO.	CL543-0685-0-57
		DRAWN : KT. ISHII	08.10.29		 1/2

DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

