

	3 - 4 3 2 0		
NOTES:	DRAWING NO.	REV	DESCR
I. MATERIALS AND FINISHES:	THIRD ANGLE PROJ. 🕀 🖯		RELEASE
BODY - BRASS, SILVER PLATING. CONTACT - BRASS, GOLD PLATING.		U	REDRAWN IN I
INSULATOR - PTFÉ			
2. MECHANICAL:			

MIL-C-39012 INSPECTION

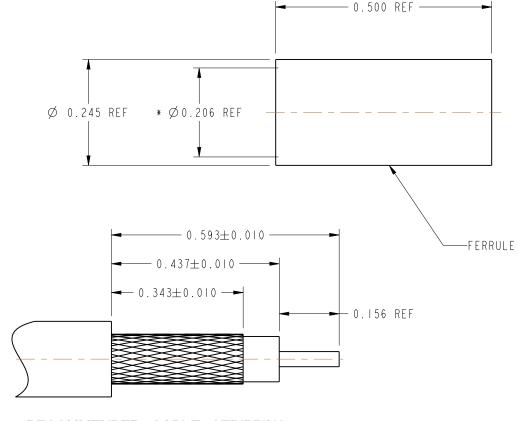

Ø 0.086 REF — ∗ ∅0.043 REF -CONTACT

0.478 REF —

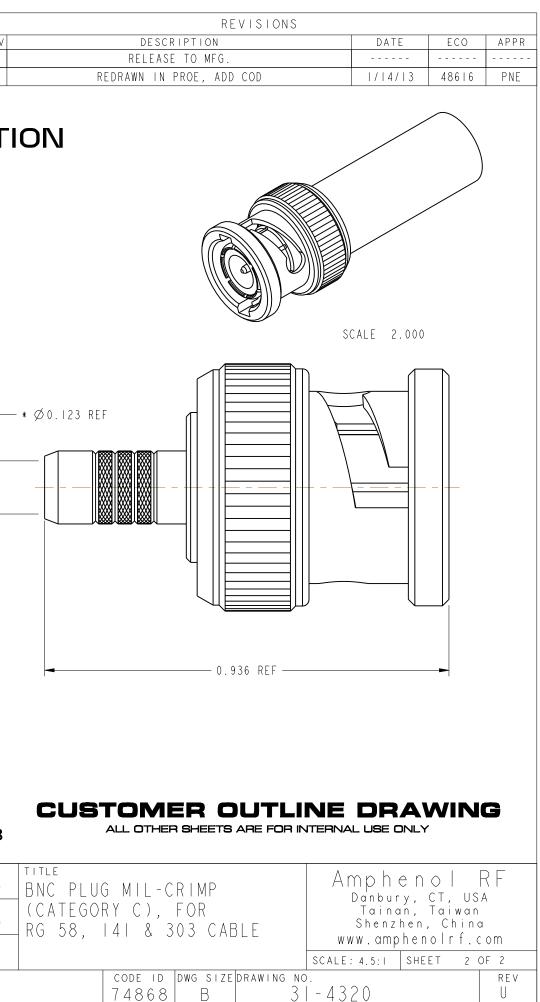

RECOMMENDED CABLE STRIPPING DIMENSIONS

A. DURABILITY: 500 CYCLES MIN.

3. PACKAGING:

6.

B. TEMPERATURE RANGE: -65° C TO +165° C

A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED "AMPHENOL RF, 31-4320, AND DATE CODE"

WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227-344 (M22520/5-01) AND DIE SET 227-1221-11, CAVITY

7. CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-11, CAVITY 'A' (M22520/5-11, CLOSLURE 'A').

 HEAT SHRINK TUBING SUPPLIED ON REQUEST.
ASTERISK (*) SHOWS CABLE ENTRY DIMENSIONS. CUSTOMER NOTE: SOLDER CONTACT TO CABLE.

'B' (M22520/5-11, CLOSURE 'B').

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,336,563

$\begin{array}{cccccccccccccccccccccccccccccccccccc$	MATERIAL REFERENCE MIL-C-39012/16-0013	DRAWN	DATE	TITLE
		PADMANABHAN E	07 - Jul - 09	BNC PLUG MIL
		ENGINEER	DATE	(CATEGORY C)
		PADMANABHAN E	07 - Jul - 09	RG 58, 141 8
		APPROVED	DATE	$\frac{1}{1}$
		K. CAPOZZI	/ 4/ 3	
		CAD FILE		CODE
		Root Folder/BNC/31-4320		748
		· · ·		